


#12 x 82" F.H. countersunk wood or machine screws (38 places).

37 bearings spaced equally @ 2.563" center to center.

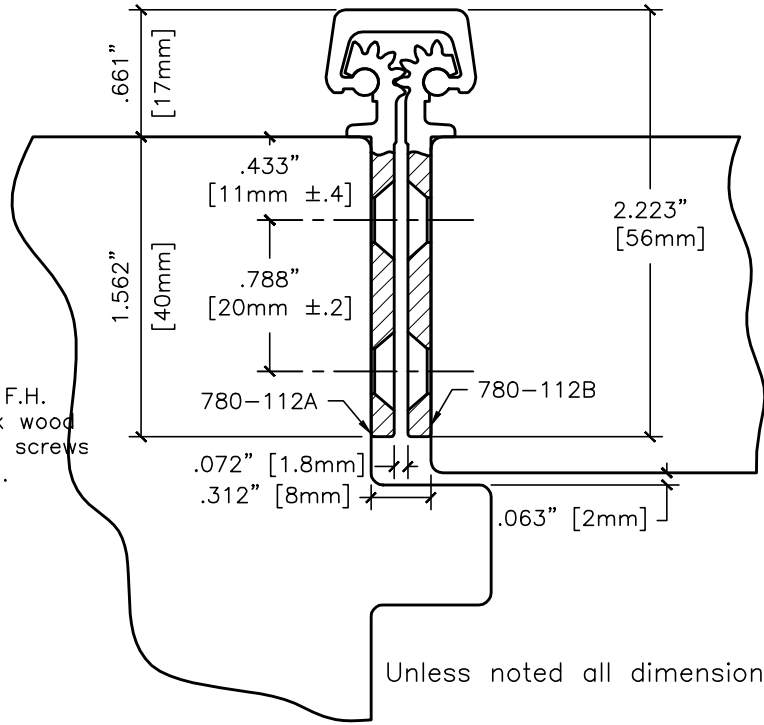


Unless noted all dimensions $\pm .020"$
 $\pm .5mm$

Vertical Hole Spacing

Non cumulative tolerances on hole to hole spacing.

	Metric (mm)	Decimal (in.)
A	2414.0 ± 0.00	95.039 ± 0.000
B	40.0 $\pm .25$	1.575 ± 0.010
C	85.0 $\pm .20$	3.346 ± 0.008
D	200.0 $\pm .20$	7.874 ± 0.008
E	260.0 $\pm .20$	10.236 ± 0.008
G	277.0 $\pm .20$	10.906 ± 0.008



1.020"
[25.9mm] Ref.

End of hinge to first bearing, both ends.

The illustration and technical description in this cut sheet is current as of the date in version date on the right.

Cal-Royal Product reserves the right to, and may, on occasions, make changes and/or improvements in designs and dimensions without prior notice.

	6605 Flotilla Street City of Commerce CA 90040 USA Tel.# (323) 888-6601 FAX # (323) 888-6699 WEB SITE: CAL-ROYAL.COM Email: sales@cal-royal.com	ITEM NO. CRHD781120	DESCRIPTION CONCEALED LEAF 95" HEAVY DUTY CONTINUOUS GEARED HINGE	NOT TO SCALE PRIMARY DIMENSION SHOWN IN INCHES, DIMENSIONS IN () ARE MM PAGE 1 of 1	UNIT BBT / ADG AED/ CVL	Prepared By: 10/27/2023	DATE 10/27/2023	DWG. NO. HGT-3038-10/23-1of1 Ver. 1.0 Rev.
--	--	------------------------	---	--	-------------------------------	----------------------------	--------------------	--