

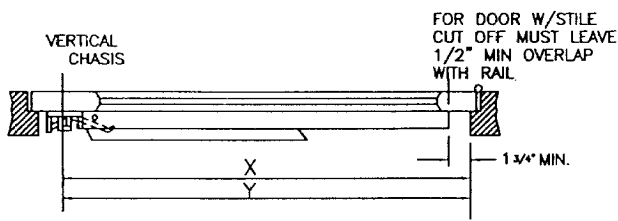


5. APPLY RAIL ASSEMBLY

1. CHECK THE SIZE OF DEVICE, IF CUTTING TO LENGTH IS REQUIRED.
2. DETERMINE CUT OFF LENGTH "X" BY SUBTRACTING 1 3/4" FROM "Y". MARK CUT OFF POINT ON MOUNTING RAIL.


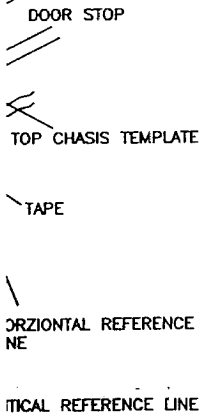


CUT OFF AND DEBURR



DON'T CUT CLOSER THAN 1 3/4" FROM LOWER PIVOT


3. DEPRESS ARM INTO RAIL OPENING AND SLIDE RAIL ONTO CHASIS. LEVEL RAIL AND FASTEN CHASIS AND MOUNTING PLATE.

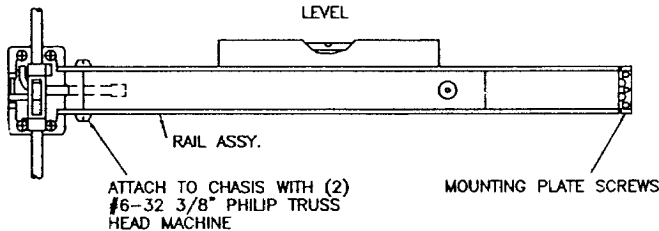

ATTACH MOUNTING PLATE TO DOOR WITH (3) ROUND HEAD SCREWS.

TRIM


IF W/O TRIM ATTACHED WITH (4) #10 WOOD OR MACHINE SCREWS.




CHASIS MOUNTING SCREWS

6. APPLY COVER


CHECK FINAL OPERATION OF DEVICE AND ADJUST THEN FASTEN COVERS.



ATTACH COVER TO TOP AND BOTTOM CHASIS WITH (4) COVER SCREWS EACH.



ATTACH END CAP TO MOUNTING PLATE WITH (2) COVER SCREWS.



ATTACH COVER TO CHASIS WITH (4) #8 TRUSS HEAD MACHINE SCREWS.

