

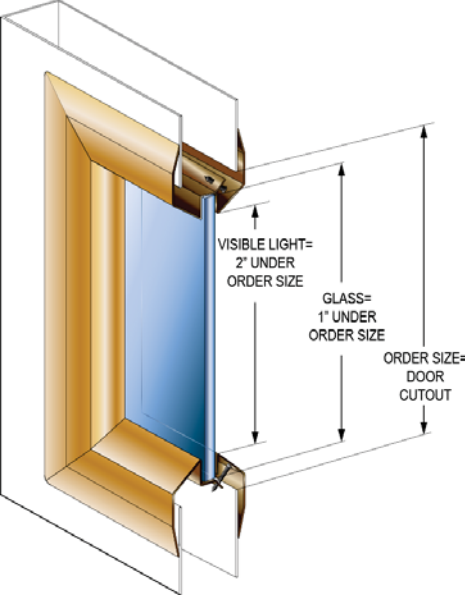




45-180 Minute Fire Rated Steel Vision Kits*

SVL , Vision Lite Low Profile

ILLUSTRATION	SPECIFICATIONS	DIMENSIONS
 	<p>For use in Fire Rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN/ULS104 (2010), NFPA (201) and CSI CODE 0870 00</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Low Profile Beveled Vision Lite - 20 Gauge Cold Rolled Steel - Mitered welded corners with counter sunk mounting holes - Single side attaching with matching mounting screws included - For use with 3/16" to 1/4" glass thickness - Designed for use with 1-3/4" doors only - Baked on powder coat finish - Color: Standard Bronze - Fastener: #8 x 7/8" flathead phillips head SMS <p>Options:</p> <ul style="list-style-type: none"> - Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Kit. - Available glass types are Tempered Glass (1/4"), Superlite I-W Wired Glass (1/4") and Pyran® Platinum F Glass (3/16") <p>Notes:</p> <ul style="list-style-type: none"> - Order size is equal to opening size - Visible vision opening is 2" under order size - Glass size dimension is 1" under complete order size - Follow all door manufacturer's instructions for use and installation of all products <p>* Refer to pricelist for list of fire rated sizes</p>	

VL , Vision Lite Standard Profile for 3/16" to 1/4" Thick Glass Frames

10VL , Vision Lite Standard Profile for 1" Thick Glass Frames

ILLUSTRATION	SPECIFICATIONS	DIMENSIONS
 	<p>For use in Fire Rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN/ULS104 (2010), NFPA (201) and CSI CODE 0870 00</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Standard Profile Beveled Vision Lite - 20 Gauge Cold Rolled Steel - Mitered welded corners with counter sunk mounting holes - Single side attaching with matching mounting screws included - For use with 3/16" to 1/4" glass thickness - Also available for 1" glass thickness (10VL Series) - Designed for use with 1-3/4" doors only - Baked on powder coat finish - Color: Standard Bronze - Fastener: #8 x 7/8" flathead phillips head SMS <p>Options:</p> <ul style="list-style-type: none"> - Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Kit. - Available glass types are Tempered Glass (1/4"), Superlite I-W Wired Glass (1/4") and Pyran® Platinum F Glass (3/16") <p>Notes:</p> <ul style="list-style-type: none"> - Order size is equal to opening size - Visible vision opening is 2" under order size - Glass size dimension is 1" under complete order size - Follow all door manufacturer's instructions for use and installation of all products <p>* Refer to pricelist for list of fire rated sizes</p>	