

300 SERIES

ANSI A156.4 Grade 1, Full Cover Multi-Size, Full Feature Closer
UL Listed, Conforms to Standards UL10C and UBC7-2-1997
BHMA Certified Lifetime Warranty



- Meets and Exceeds ANSI Standard A156.4 Grade 1
- Universal Hole Pattern Offering Versatility and Precision Engineering for New and Retrofit Market
- Multi Size and Adjustable Commercial Door Closer Sizes 1 thru 4 and 3 thru 6 Meeting Barrier Free Applications
- Hydraulic Door Closer with Standard Back-Check
- Full Plastic Cover is Standard Feature
- Optional Adjustable Delayed Action for Handicapped or Elderly

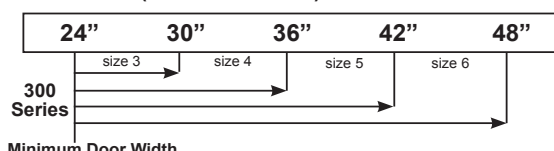


TABLE OF SIZES

Closing power of closers may be adjusted 50%


→ Shows recommended range of door width for closer size.

EXTERIOR (and VESTIBULE) DOOR WIDTH



Minimum Door Width

INTERIOR DOOR WIDTH

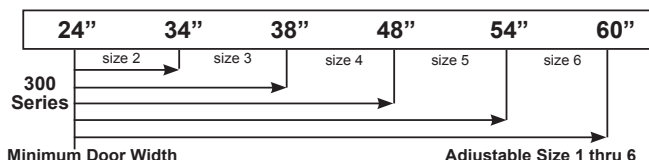

Minimum Door Width


Adjustable Size 1 thru 6

FEATURES


- Factory Tested to Meet or Exceed ANSI Standard A156.4 Grade 1
- **300 PBFCOV:** Non-Sized, Fully Adjustable 1 through 4, (Barrier Free ADA). Full cover. For 30-185 lbs Door Weight
- **300 PCOV:** Non-Sized, Fully Adjustable 3 through 6. Full cover. For 85-260 lbs Door Weight
- Hydraulic Door Closer with Standard Adjustable Back-Check Valve
- Standard Full Plastic Cover (2 5/8" W x 3" H x 10 1/8" L) **COV / 400**
- Universal Mounting - Standard Size #4 Mounting Holes. (9-1/16")
- Finishes Available: Alum, Dark Bronze (Duro), Gold and US3
- Dual Valve, Closing and Latching Speed Controlled by Two Separate Regulating Valves
- Universal Application, Non-Handed, Designed for All Standard Installations

DIMENSION DESCRIPTION	300PBFCOV / 300PCOV
A. Length of Closer Body	9 3/4"
B. Horizontal Mounting Holes	9 1/16"
C. Vertical Mounting Holes	3/4"
D. Height of Closer Body	1 3/4"
E. Projection from Door	2 7/8"

SPECIFICATIONS


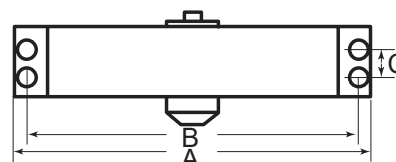


FRONT VIEW




300 Series END VIEW

300 SERIES : REGULAR ARM INSTALLATION (PULL SIDE)

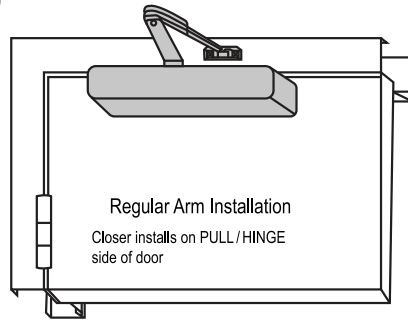
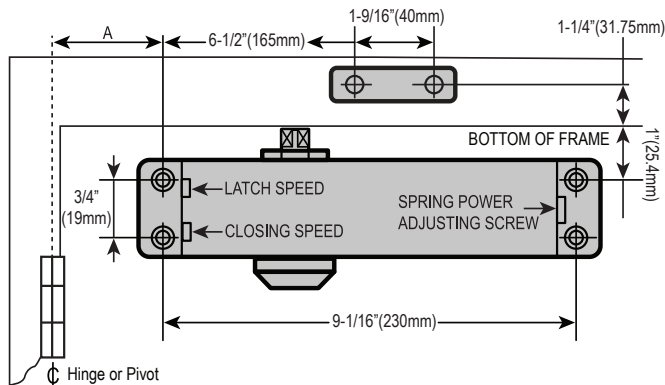


OPENING	DIM A
TO 100°	4-23/32" (120mm)
TO 100°- 120°	4-23/32" (120mm)
OVER 180°	3-5/32" (80mm)

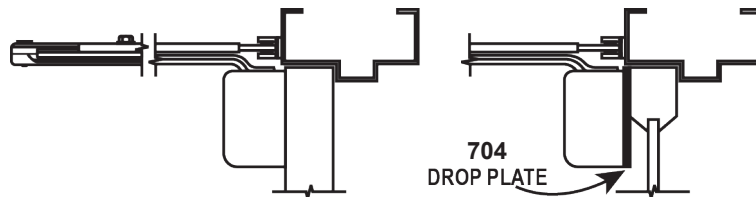


- RIGHT HAND DOOR SHOWN
- LEFT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE

300 SERIES : TOP JAMB INSTALLATION (PUSH SIDE)


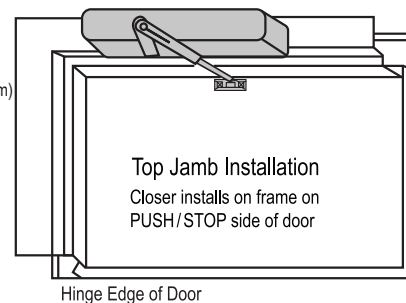
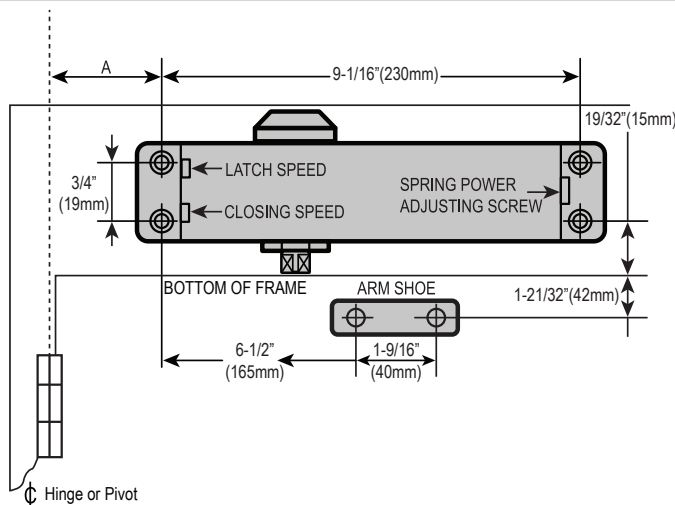


OPENING	DIM A
TO 100°	5-1/2" (140 mm)
100° 120°	5-1/8" (130 mm)
OVER 180°	3-17/22" (90 mm)

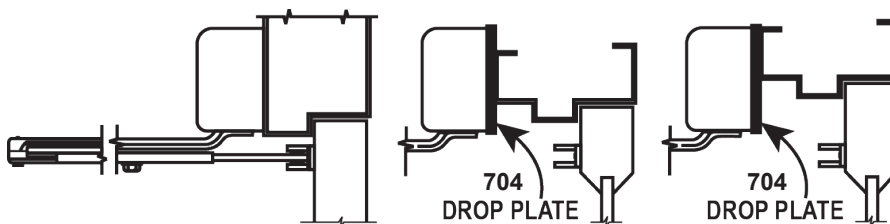


- LEFT HAND DOOR SHOWN
- RIGHT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE

300 SERIES : PARALLEL ARM INSTALLATION (PUSH SIDE)

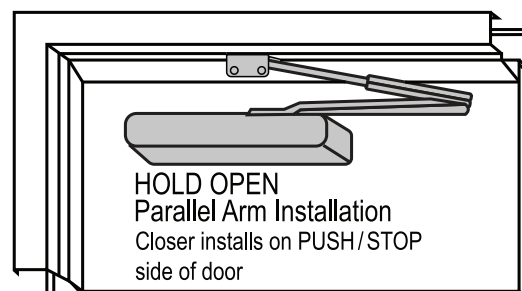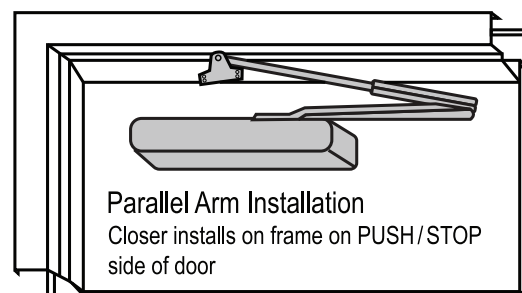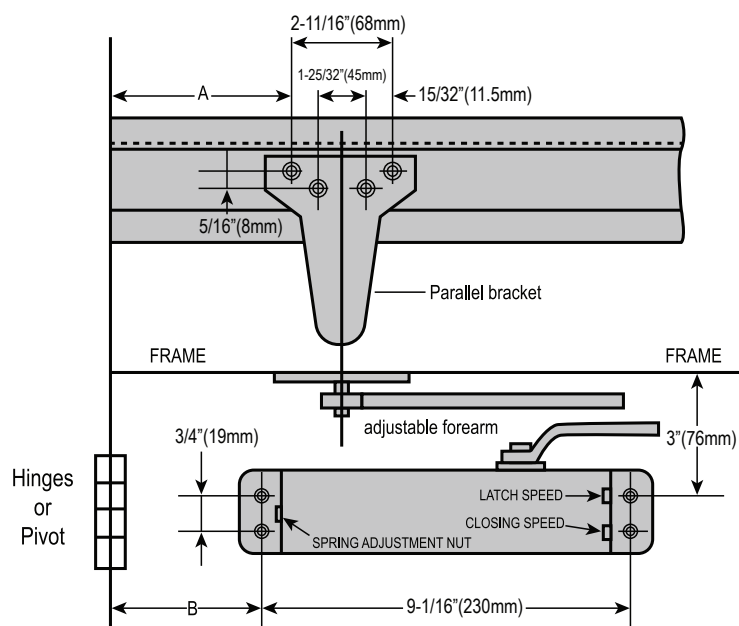


OPENING	DIM A	DIM B
TO 100°	7-7/8" (200 mm)	5-29/32" (150 mm)
120° - 180°	6-11/16" (170 mm)	4-23/32" (120 mm)

- LEFT HAND DOOR SHOWN
- RIGHT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE


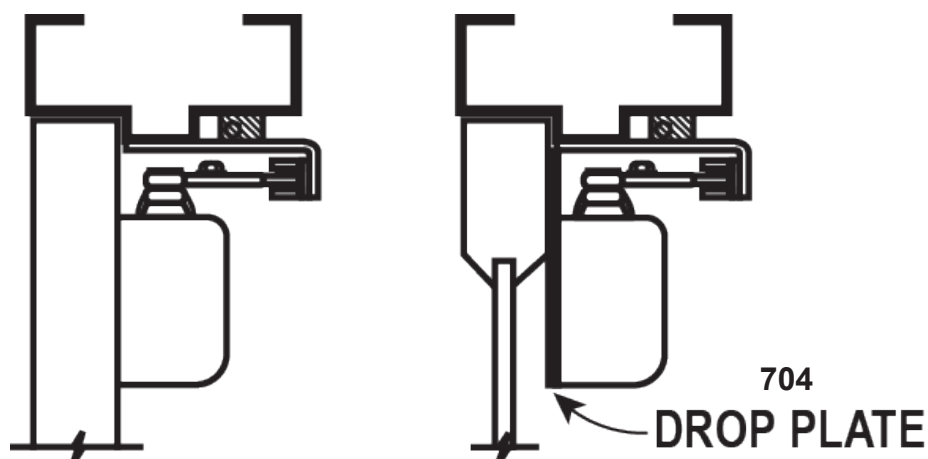


Cushion Heavy Duty Stop Spring Arm with Spring Shoe

300 SERIES : REGULAR ARM INSTALLATION (PULL SIDE)

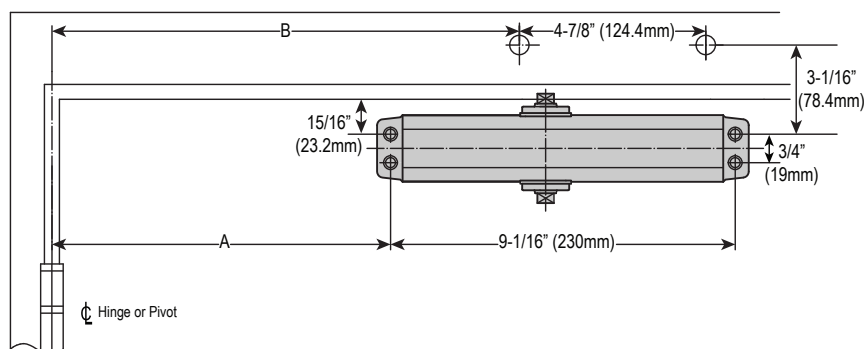


OPENING	DIM A	DIM B
TO 85°	8-7/8\"	12-1/4\"
TO 90°	8-1/4\"	11-5/8\"
TO 100°	7-3/8\"	10-13/16\"
TO 110°	6-5/8\"	10-1/16\"

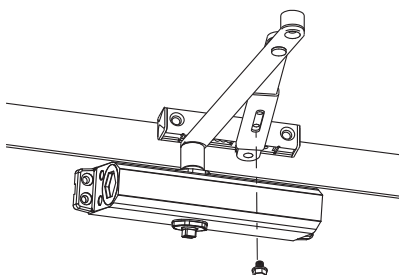
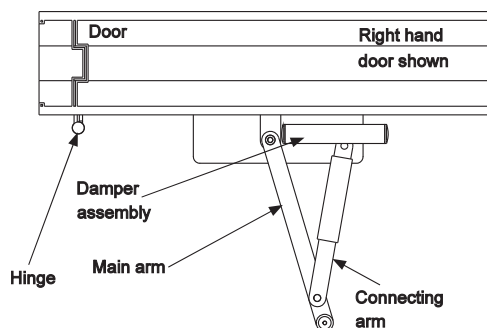


- RIGHT HAND DOOR SHOWN
- LEFT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE

300 SERIES : TOP JAMB INSTALLATION (PUSH SIDE)

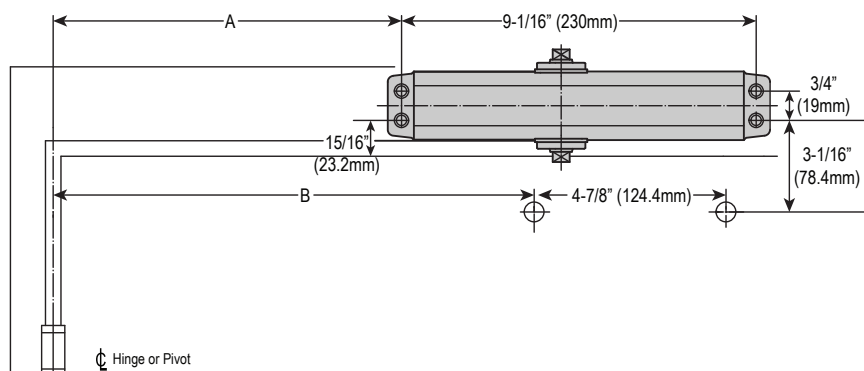

OPENING	DIM A	DIM B
TO 85°	7-13/16\"	11\"
TO 90°	7-1/2\"	10-11/16\"
TO 100°	6-3/8\"	9-9/16\"
TO 110°	5-3/4\"	8-15/16\"

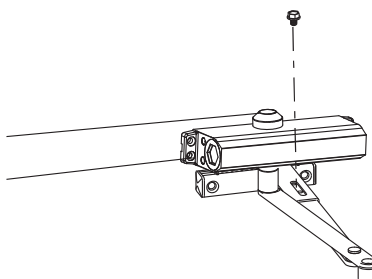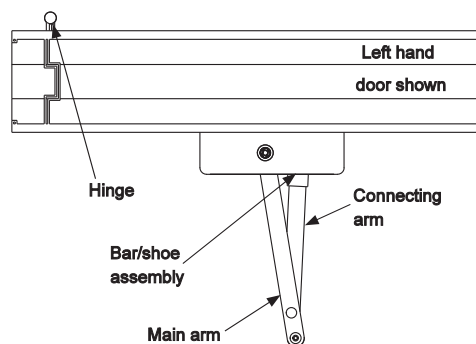


- LEFT HAND DOOR SHOWN
- RIGHT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE


RHDSTP ARM INSTALLATION

Cushion Heavy Duty Stop Arm

300 SERIES : REGULAR ARM INSTALLATION (PULL SIDE)

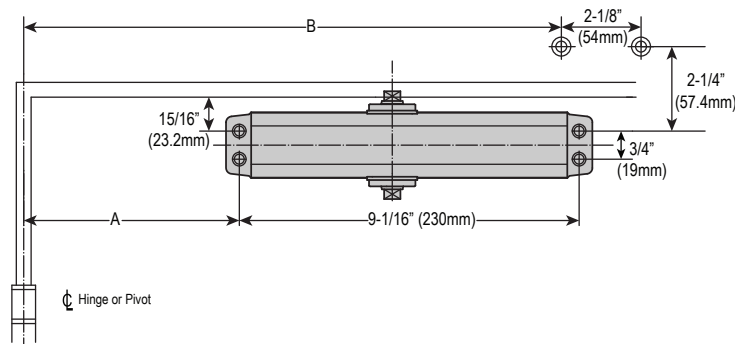


OPENING	DIM A	DIM B
TO 85°	5-3/4" (146mm)	14-5/16" (364mm)
TO 90°	5-1/8" (130mm)	14" (355mm)
TO 95°	4-5/16" (110mm)	13-11/16" (348mm)
TO 100°	5-1/4" (133mm)	13-1/16" (332mm)
TO 105°	3-3/4" (95mm)	12-3/4" (323mm)
TO 110°	3-5/8" (92mm)	12-5/16" (313mm)

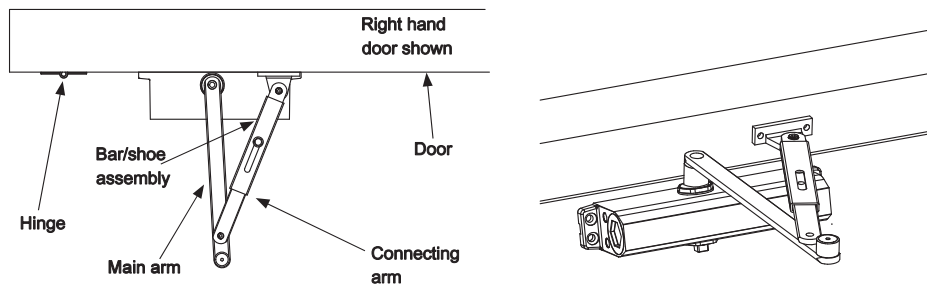


- RIGHT HAND DOOR SHOWN
- LEFT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE

300 SERIES : TOP JAMB INSTALLATION (PUSH SIDE)

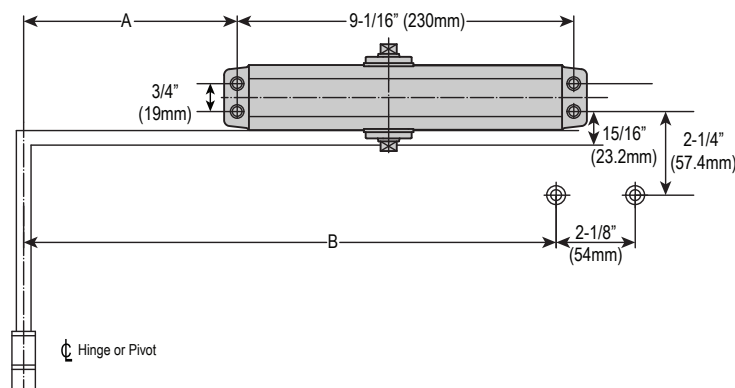

OPENING	DIM A	DIM B
TO 85°	6-3/8" (162mm)	13-3/8" (339mm)
TO 90°	5-5/8" (143mm)	12-13/16" (326mm)
TO 95°	5-3/8" (137mm)	12-7/16" (316mm)
TO 100°	5-1/8" (130mm)	12" (304mm)
TO 105°	4-7/8" (124mm)	11-11/16" (297mm)
TO 110°	4-5/8" (117mm)	11-7/16" (291mm)

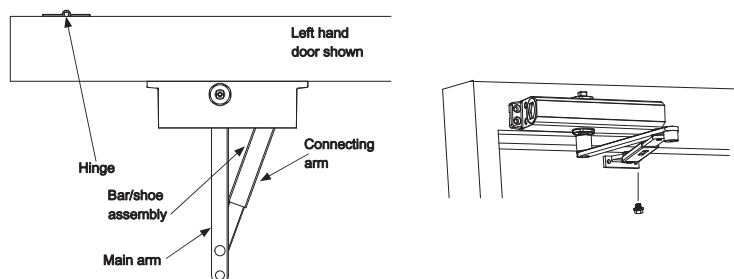

- LEFT HAND DOOR SHOWN
- RIGHT HAND DOOR OPPOSITE
- DIMENSIONS ARE IN INCHES
- DRAWING NOT TO SCALE