




CAL-ROYAL

PRODUCTS, INC. U.S.A.



4400 Series Rim Type Panic Exit Device

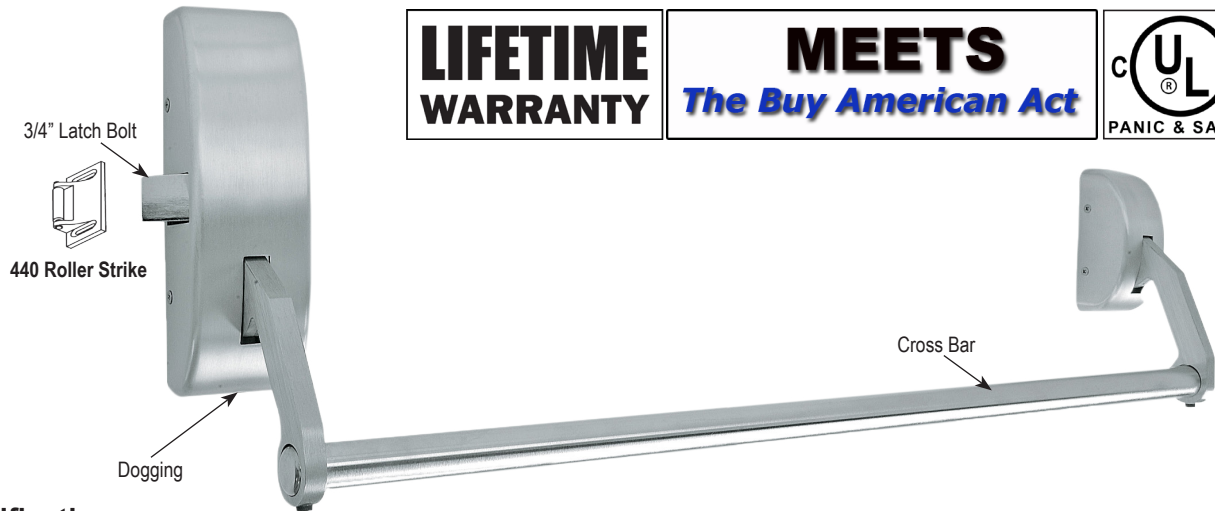

LIFETIME WARRANTY

MEETS
The Buy American Act



Specifications

For Doors.....	1 3/4" thick standard. 4 1/2" minimum stile width required for single or double door application using standard 440 strike and pull lever, thumbpiece and escutcheon trims
Chassis.....	Non-ferrous Alloy. (Panic Grade)
Cover.....	Non-ferrous Alloy. Covers stock hollow metal doors with 161 cut out
Mounting.....	Furnished with wood and machine screws. Available thru-bolts on request
Hand.....	Handed, Reversible, Specify handing for convenience
Latch Bolt.....	Stainless Steel 3/4" throw
Spring.....	Stainless Steel throughout
ANSI Standard.....	A156.3, Grade 2
Cross Bar.....	1" Dia. Steel, 0.058" thick for 36" or 48" wide doors
Strike.....	Roller type
Dogging Feature.....	Allen-type key furnished standard
Mullion.....	Available
UL and ULC Listed.....	4400 Series for panic
Finish.....	US26D Satin Chrome, Dark Bonze Duranodic (DURO)
Anti-Microbial Coating.....	Available on US26D only. Use part # ANTB-EXIT
Door Size.....	4400EO36 for 36" doors 4420EO48 for 48" doors



DIMENSIONS

Touchbar height to finished floor	36 1/2" (927 mm) at center
Latch height to finished floor	41" (1041 mm)
Touchbar projection	
Neutral	4 3/4" (121 mm)
Depressed	3" (76 mm)
Main case	8 1/2" x 2 5/8" x 2" (216 mm x 67 mm x 51 mm)
End case	4 7/8" x 2 1/8" (124 mm x 54 mm)
Cross Bar Length	30" for 36" door, 42" for 48" door

4 1/2" Minimum Stile Requirements

DOUBLE DOOR

4 1/2" MIN. STILE

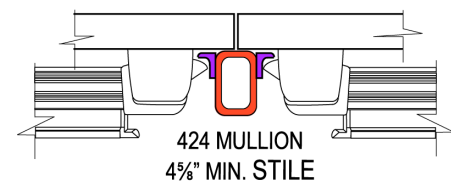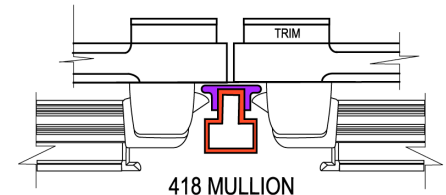

SINGLE DOOR

