


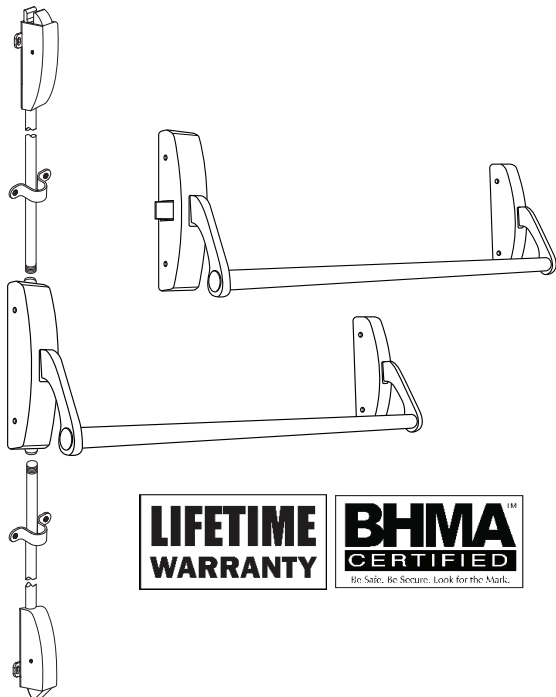

45-RIM & 45-SVR (Non-Fire Rated) F45-RIM & F45-SVR (Fire Rated)

4500 Series, Crossbar Narrow Stile Exit Device
ANSI A156.3 Grade 1, 3-Hour Rated, UL-Listed



ILLUSTRATION	ITEM #	DESCRIPTION	FINISH
 <div></div>	NON-FIRE EXIT HARDWARE		
	45-RIM-36	Rim exit, 36" wide, *SH	ALUM, DURO
	45-RIM-48	Rim exit, 48" wide, *SH	
	45-SVR-3684	Surface vertical rod, 36" x 84"	
	45-SVR-4896	Surface vertical rod, 48" x 96"	
	FIRE EXIT HARDWARE RATED 3 HOURS (Includes thru-bolts)		
	F45-RIM-36	Rim exit, 36" wide, *SH	ALUM, DURO
	F45-RIM-48	Rim exit, 48" wide, *SH	
	F45-SVR-3684	Surface vertical rod, 36" x 84"	
	F45-SVR-4896	Surface vertical rod, 48" x 96"	

*SH Specify Left Hand Reverse (LHR) or Right Hand Reverse (RHR) for convenience on RIM DEVICES ONLY.
SURFACE VERTICAL ROD (SVR) DEVICES are Non-Handed and are Easily field reversible.

❖ ❖ ❖ **MUST ORDER TRIM SEPARATELY** ❖ ❖ ❖

PACKAGING INCLUDES

- 4 pcs per master carton
- Thru-Bolts for Fire-Rated Devices only. (8pcs for Rim, 12pcs for Surface Vertical Rod)

NON-STOCK FINISHES


- Availability subject to minimum quantity and lead time. Consult factory.

LBR45-SVR (Non-Fire Rated) LBRF45-SVR (Fire Rated)

4500 Series, Crossbar Narrow Stile Exit Device

Less Bottom Rod - LBR; ANSI A156.3 Grade 1, 3-Hour Rated, UL-Listed



ILLUSTRATION	ITEM #	DESCRIPTION	FINISH
	NON-FIRE EXIT HARDWARE		
	LBR45-SVR-3684	Surface vertical rod, 36" x 84"	ALUM, DURO
	LBR45-SVR-4896	Surface vertical rod, 48" x 96"	
	FIRE EXIT HARDWARE RATED 3 HOURS (Includes thru-bolts)		
	LBRF45-SVR-3684 Includes thru-bolts & AUX Latch	Surface vertical rod, 36" x 84"	ALUM, DURO
	LBRF45-SVR-4896 Includes thru-bolts & AUX Latch	Surface vertical rod, 48" x 96"	

SURFACE VERTICAL ROD (SVR) DEVICES are Non-Handed and are Easily field reversible.

ACCESSORIES	
AUXFL	Additional auxiliary latch (Raw finish)

❖ ❖ ❖ MUST ORDER TRIM SEPARATELY ❖ ❖ ❖

LBR FIRE-RATED DEVICES PACKAGING

- (10pcs) Thru-Bolts for Fire-Rated Devices only.
- Packed with Auxiliary Fire Spring Latch, to be installed 6" from the floor in the lower part of the door
- 1 pc Strike Hole Plug for strike door.
- 4 pcs per master carton

LBR NON-FIRE RATED DEVICES PACKAGING

- 4 pcs per master carton

NON-STOCK FINISHES

- Availability subject to minimum quantity and lead-time. Consult factory.