



CAL-ROYAL

P R O D U C T S I N C.

BUILDERS HARDWARE

OCTOBER 2017



CAL-ROYAL PRODUCTS, INC.
6605 FLOTILLA ST., COMMERCE CA 90040 USA
TEL:(323)888-6601 FAX: (323)888-6699
Website: www.cal-royal.com Email: sales@cal-royal.com

TABLE OF CONTENTS

I. NUMBERS AND LETTERS

Letters, Diecast.....	1
Numbers, Diecast.....	1
Letters A-F, Solid Brass.....	1
Letters, Solid Brass.....	1
Numbers, Solid Brass.....	1

II. MISCELLANEOUS DOOR AND WINDOW HARDWARE

Window Casement Fasteners.....	2
ASA Blank Filler Plate.....	
Door Silencers.....	3
Latch Guard Protectors.....	3
Heavy Duty Roller Catch.....	4

III. STRIKES

Template ASA Strikes.....	2
Extended Lip ANSI Strikes.....	2
Flat Strikes.....	2
Optional T-Strike for ARL-1338.....	4
Security Strikes, Heavy Duty.....	2
Security Strikes, Deadbolts.....	2
Drive in Thimble Strikes.....	3
Strike Filler.....	3
Brass Dust Proof Strikes.....	3
Strike for Privacy SDL.....	11
Strike for MB85R and MB86S.....	13
Strike for FBG6 and FBGEX12.....	14
Strike for MF6341.....	15

IV. KICK / ARMOR AND PUSH/PULL PLATES

Armor Plates.....	4
Kick Plates.....	4
Push Plates.....	4-5
Pull Plates.....	5

V. DOOR PULLS

Solid Bar Round Pulls.....	6
Solid Bar Handle Pulls.....	6
Solid Bar Handle Pulls, Ellipse.....	6
Door Pulls, Heavy Cast Aluminum.....	6

VI. DOOR KNOCKERS, DOOR VIEWERS

Door Knockers, Solid Brass.....	7
Door Knocker with Viewers.....	7
Door Viewers, Brass.....	8
Door Viewers, UL.....	8
Door Viewers, Glass Lens.....	8
Door Viewer Covers.....	9
Electronic Digital Door Viewers.....	9

VII. DOOR GUARDS

Privacy Door Latch.....	9
Solid Brass Chain Door Guards.....	10
Swing Bar Door Guards, Zinc Diecast.....	10
Swing Bar Door Guards, Diecast.....	10
Swing Bar Door Guards, Solid Brass w/ Angle Protector.....	10

VII. DOOR GUARDS

Door Angle Protector.....	10
Door Guard Shim.....	10

VIII. SLIDING DOOR LOCKS

Privacy Sliding Door Locks, Heavy Duty.....	11
Passage Sliding Door Locks, Heavy Duty.....	11
Privacy Sliding Door Locks.....	11-12
Passage Sliding Door Locks.....	11-12
Pocket Door Locks, Privacy.....	12
Pocket Door Locks, Dummy.....	12

IX. SECURITY BOLTS

Decorative Dutch Door Bolts, Solid Brass.....	13
Surface Bolts, Brass.....	13
Surface Bolts, Decorative.....	13
Surface Bolts, Decorative Heavy Duty Angle Strike.....	13
Surface Bolt, UL-Listed 8".....	15
Surface Mounted, UL-Listed 8", 12".....	15

X. FLUSH BOLTS

AUTO FLUSH BOLTS

Metal Door Automatic Flush Bolts.....	16
Wood Door Automatic Flush Bolts.....	16

COMBINATION FLUSH BOLTS

Metal Door Self-Latching Flush Bolts.....	16
Wood Door Self-Latching Flush Bolts.....	16

SECURITY FLUSH BOLT

Solid Brass Flush Bolt, Round Ends.....	13
Solid Brass Flush Bolt, Square Ends.....	13
Flip Style Mortise Flush Bolt, 18" Extension Rods.....	14
Flip Style Mortise Flush Bolts.....	14
Residential Flush Bolts.....	14
Single Route Extension Flush Bolt, Solid Brass.....	14
Single Route Flush Bolt, Solid Brass.....	14
Lever Extension Flush Bolts, UL-Listed Solid Brass.....	15
Commercial Manual Flush Bolt, Stamped Brass.....	15

UNIVERSAL FLUSH BOLTS

.....	17
-------	----

XI. DOOR COORDINATORS

Coordinators with Filler Bars, UL.....	18
Gravity Coordinators, UL.....	18
Carry Bars.....	18
Mounting Brackets.....	18

XII. HANDRAIL BRACKETS

Handrail Brackets, Jumbo Heavy Duty.....	19
Handrail Brackets, Diecast.....	19
Handrail Brackets, Heavy Duty Cast Aluminum.....	19
Handrail Brackets, Heavy Duty Cast.....	19
ADA-Approved, Handrail Bracket, Heavy Duty Cast.....	19

XIII. DOOR STOPS

WALL DOOR STOPS / BUMPERS

Concave Wall Stops, Stainless Steel.....	20
Convex Wall Stops, Stainless Steel.....	20

TABLE OF CONTENTS

XIII. DOOR STOPS

WALL DOOR STOPS / BUMPERS

Convex Wall Stops, Solid Brass.....	20
Commercial Grade Wall Door Stops.....	20
Roller Stops, Solid Brass.....	20
Rigid Door Stops, Solid Brass.....	21
Flexible Door Stops.....	21
Rigid Door Stops, Cast.....	21
Flexible Snap on Door Stops, Heavy Duty.....	21
Flexible Door Stops, Heavy Duty.....	21
Rigid Door Stops, Diecast Jumbo.....	21
Wall Door Stops, Stainless Steel.....	21-22

FLOOR DOOR STOPS

Commercial Grade Floor Door Stops, Heavy Duty.....	22
Security Door Stops.....	22
Goose Neck Floor Stops.....	22-23
Small Goose Neck Floor Stops.....	23
Dome Stops, Floor.....	23
Dome Stops, Heavy Duty Cast Brass.....	23
Risers for Dome Stops.....	23
Stainless Steel, Floor Stops.....	24

DOOR HOLDER/STOPS

Kick Down Door Holders, Zinc Diecast.....	24
Kick Down Door Holders, Solid Brass.....	24-25
Vinyl Rubber Stops.....	24-25
Kick Down Door Holders, Cast Iron.....	25
Commercial Grade Door Stops, Heavy Duty.....	25

HINGE PIN DOOR STOPS

Hinge Pin Stops, Heavy Duty.....	26
Hinge Pin Stops, Light Duty.....	26
Hinge Pin Door Stops, Deluxe.....	26
Hinge Pin Door Stops, Jumbo.....	26
Hinge Pin Door Stops, Jumbo Heavy Duty.....	26
Hinge Pin Door Stops, Residential.....	26

XIV. CLOSET HARDWARE

CLOSET RODS & SUPPORTS

Adjustable Closet Rods.....	27
Adjustable Shelf and Rod Support.....	27
Adjustable Shelf Support Only.....	27
Heavy Duty Shelf & Rod Support.....	28
Single Shelf & Rod Support.....	27
Oval Closet Rods.....	27

POLE SOCKETS

Closet Pole Sockets.....	28
Steel Closet Pole Sockets.....	28
Wood Closet Pole Sockets.....	28

CATCH AND LATCHES

Adjustable Ball Catch with Full Lip.....	28
Adjustable Ball Catch, Solid Brass.....	28
Adjustable Drive-In Ball Catches.....	29
Jumbo Roller Catch.....	28
Adjustable Roller Catch.....	29
Bullet Catches.....	29

XIV. CLOSET HARDWARE

CATCH AND LATCHES

Magnetic Dual Triple Pole Catch, Heavy Duty.....	30
Magnetic Triple Pole Catch.....	30
T-Strike for Bullet Catch.....	29

PULLS

Solid Brass Drawer Pulls.....	29
Bi-Fold Ball Knob Pulls.....	30
Bi-Fold Ball Knob Back Plates.....	30
Bi-Fold Concave Knob Beveled Edge Pulls.....	30
Drive in Finger Pulls.....	30

COAT AND HAT HOOKS

.....	30
-------	----

XV. DOUBLE-ACTING FLOOR SPRING HINGE..... 31

XVI. CRASH CHAIN AND BOLTS

Single Spring Crash Chain Doors.....	31
Super Heavy Duty Chain Doors.....	31
24" Chain Bolt Hardened Steels.....	31

XVII. SURFACE OVERHEAD DOOR HOLDER & STOPS

CR550 Series.....	32
-------------------	----

XVIII. SIGNS

HANDICAP RESTROOM SIGNS (ADA) W/ BRAILLE

Boys Signs.....	33-34
Girls Signs.....	33-34
Men Signs.....	33-34
No Smoking Signs.....	33-34
Unisex Restroom Signs.....	33-34
Women Signs.....	33-34
Exit Signs.....	33
Restroom Signs.....	33

DECALS AND STICKERS

Blue insignia handicap logos.....	34
Blue square plastic sign & handicap logos.....	34
These doors ... unlocked during business hours.....	34
These doors ... unlocked when building is occupied.....	34
This door... unlocked during business hours.....	34
This door ... unlocked when building is occupied.....	34

CALIFORNIA-APPROVED RESTROOM SIGNS W/ BRAILLE

Exit Signs.....	35
Handicap Accessible Signs.....	35
Men Signs.....	35
Restroom Signs.....	35
Unisex Restroom Handicap Signs.....	35
Women Signs.....	35

XIX. SLIDING DOOR HARDWARE

STAINLESS STEEL DOOR HARDWARE (SDH SERIES)

SDH Series for Wood Doors.....	36
SDH Series for Wood and Glass Doors.....	36

BLACK BARN DOOR HARDWARE (BDH SERIES)

BDH Series for Wood Doors.....	37
--------------------------------	----


NUMBERS AND LETTERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Solid Brass Numbers	Height: 2" Thickness: $\frac{3}{16}$ " Width: Varies	SBN2	US3
		Height: 3" Thickness: $\frac{3}{16}$ " Width: Varies	SBN3	US15, 3, US10B
		Height: 4" Thickness: $\frac{3}{16}$ " Width: Varies	SBN4	US15, 3, US10B, 26
		Height: 8" Thickness: $\frac{9}{32}$ " Width: Varies	SBN8	US3
	Diecast Numbers	Height: 5" Thickness: $\frac{7}{32}$ " Width: Varies	ZN5	US3, 15, US10B
	Solid Brass Letters	Height: 2" Thickness: $\frac{7}{32}$ " Width: Varies	SBL2	US3
		Height: 2" Thickness: $\frac{7}{32}$ " Width: Varies	SBL3	US3 (A-Z), US15(A-H), 10B (A-F)
		Height: 4" Thickness: $\frac{7}{32}$ " Width: Varies	SBL4	US3 (A-Z), US15,10B, 26 (A-F)
	Diecast Numbers (0-9) and Letters (A-F)	Height: 4" Thickness: $\frac{3}{32}$ " Width: Varies	PN20BK	Black
			PN20US3	US3

Individually Poly-bagged. Packed with Flat Head Screws


Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

MISCELLANEOUS DOOR AND WINDOW HARDWARE

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Window Casement Fasteners, Solid Brass - Packed with screws and two strikes - Conforms to ANSI / BHMA 156.16 - Architectural finishes available	1 5/8" x 7/8" Projection: 1 3/8"	SBCF222	US3, 26, 19, US15, 5, US15A, 10B, US26D
		2 1/16" x 1 1/16" Projection: 1 7/8"	SBCF333	
	Door / Window Casement Security Latch Lock	Bolt Projection: 1/2" Escutcheon Dimension: 7/8" x 1 11/16" Thumbturn: 5/8" x 1" Strike: 7/8" x 1 3/4"	DL402361	US10B, 26, US15, 26D, US3, 5
	Template ASA Strike	4 7/8" x 3 3/8" x 1 1/4"	ASA478	US32D
	Stainless Steel			US26, 10, US3, 10B
	Template ASA Strike, Steel Base		ASAST	US26D, 26, US10, 3, US10B
	Extended Lip ANSI Strike, Stainless Steel	4 7/8" x 3 3/8" x 1 1/4", 1 3/4" Lip Extension from Screw Center Line	EXASA-175	US32D, Duro
	Flat Strike, Stainless Steel - To be used for pair of doors on inactive door, not to cut out the flat astragal - Packed with screws	4 7/8" x 3 3/8" x 1 1/4", 4 1/8" CTC	FLAST-46	US32D, 10B
	Heavy Duty Security Strike Includes: 2 pcs #10 x 2 1/2" and 2 pcs #10 x 3/4" Wood Screws	3 5/8" x 1 7/8"	SDTP3625	US3, 26, 15, US10B, 15A
	Deadbolt Security Strike Includes: 2 pcs #12 x 3" 2 pcs #12 x 1 1/4" wood screws	3 5/8" x 1 1/4"	SS114358	US3


Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

MISCELLANEOUS DOOR AND WINDOW HARDWARE

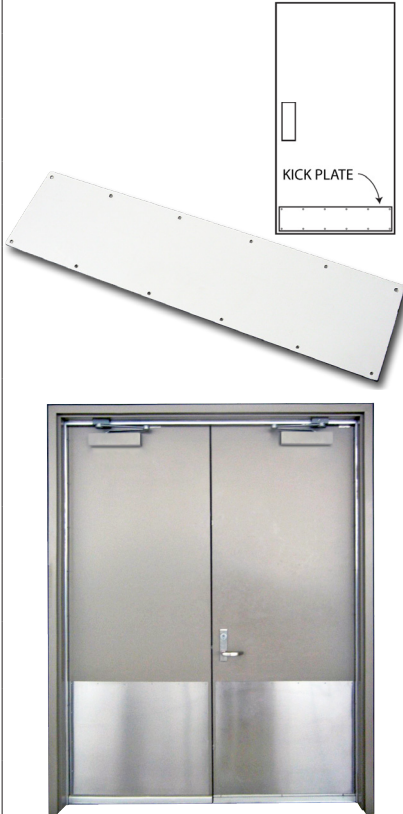
ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Drive In Thimble Strike ▶ Steel Construction ▶ ZINC Plated ▶ With 1 1/4" Screw	Length: 1 1/8" Diameter: 1"	DTS80	Zinc
	ASA Blank Filler Plate Used for Door Frames	1 1/4" x 4 7/8"	ASA-FP	---
	Strike Filler Used for Door Frames	1 1/4" x 4 7/8" 1 5/8" at Lip Thickness: 10 Ga.	SF	---
	Door Silencer for Metal Frames ▶ Absorb Shock and Reduce Noise of Door Closing ▶ Prevents door rattling ▶ Provides tension for door latches / locks ▶ Conforms to ANSI / BHMA 156.16, L03011	Length: 1/2" Diameter: 1/2"	DSM21	Rubber
	Door Silencer for Wood Frames ▶ Absorb Shock and Reduce Noise of Door Closing ▶ Prevents door rattling ▶ Provides tension for door latches / locks ▶ Conforms to ANSI / BHMA 156.16, L03021	Length: 3/4" Base: 3/8" x 3/4"	DSW85	Rubber
 LPG2 GJLPG2	Latch Guard Protector ▶ Universal latch guard for out-opening doors ▶ Fits most single, double and mortise locks ▶ Conforms with ANSI / BHMA 156.2 Series 4000	2 7/8" x 11"	LPG2	USP, Alum Duro, Gold
		3" x 11 1/2"	GJLPG2	US32D
	Brass Dust Proof Strike ▶ Spring tension calibrated for positive closing and eliminates binding ▶ Can be locked in up position ▶ Conforms to ANSI / BHMA 156.16 L14011	Face Plate: 1 3/8" x 2 7/8" Barrel: 1" diameter Depth: 2 1/4"	DPSTRK1	US26D, 26, US3, 10B

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

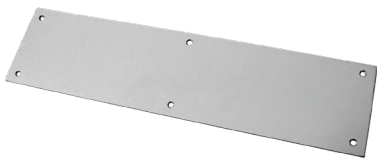
MISCELLANEOUS DOOR AND WINDOW HARDWARE

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Heavy Duty Roller Catch ▶ Adjustable Nylon Roller with Square Heavy Duty Cast 2 1/4" Full-lip Strike ▶ Conforms to ANSI / BHMA A156.16, E19091	Face Plate: 1" x 3 3/8" Full Lip Strike: 1/8" x 1" x 3 3/8" Depth: 1 13/16"	ARL-1338	US3, 26, 19, US15, 5, US15A, 10B, US26D
	Optional T-Strike for Heavy Duty Roller Catch ARL1338 ▶ Architectural finishes available ▶ Packed with screws	2 3/4" x 1 1/2" x 1 3/4"	ARLSTRK62	US26D, 26, US19, 15, 5, US3, 15A, US10B

KICK / ARMOR PLATES

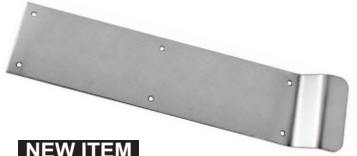
	Metal Kick Plates ▶ Conforms to ANSI / BHMA A156.6 ▶ Packed with #6 x 5/8" screws	0.050" x 8" x 34"	BKICK834	US32D
			KICK834	US10B
		0.040" x 8" x 34"	AKICK834	US32D
		0.050" x 10" x 34"	BKICK1034	US32D
	Stainless Steel Kick Plates ▶ Conforms to ANSI / BHMA J102 ▶ Packed with #6 x 5/8" screws		KICK1034	US10B
		0.040" x 10" x 34"	AKICK1034	US32D
	Stainless Steel Kick Plates ▶ Conforms to ANSI / BHMA J102 ▶ Packed with #6 x 5/8" screws	0.050" x 10" x 46"	BKICK1046	US32D
	Stainless Steel Kick Plates ▶ Conforms to ANSI / BHMA J102 ▶ Packed with #6 x 5/8" screws	0.050" x 12" x 34"	BKICK1234	US32D
	Aluminum Kick Plate ▶ Conforms to ANSI / BHMA A156.6 ▶ Anodized Aluminum finish ▶ Packed with #6 x 5/8" screws	0.032" x 6" x 34"	ANO634	US3/4, US10B, 15
		0.032" x 8" x 34"	ANO834	
		0.032" x 10" x 34"	ANO1034	
	Stainless Steel Armor Plates ▶ Conforms to ANSI / BHMA J101 ▶ Packed with #6 x 5/8" screws	0.050" x 34" x 34"	BARM3434	US32D
		0.050" x 34" x 36"	BARM3436	US32D

PUSH / PULL PLATES

	Push Plate ▶ Individually packed with protective film and screws ▶ Easy installation ▶ Conforms to ANSI / BHMA A156.6 ▶ Architectural finishes available	0.050" x 3 1/2" x 15"	PSPL3515	US32D, US10B, 10, US5, 4, 3, US26
		0.050" x 4" x 16"	PSPL4016	

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

PUSH / PULL PLATES

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Pull Plate - One piece mounted - Conforms to ANSI / BHMA A156.6 - Architectural finishes available	0.050" x 3 1/2" x 15"	PULPL3515	US32D, US26, 10, US5, 4, 3, US10B
		0.050" x 4" x 16"	PULPL4016	
 NEW ITEM	Stainless Steel Push / Pull Plate - BHMA: J303 - Fasteners: Six (6) #6 x 5/8" OPH tapping screws	Plate: 3 9/16" X 16 5/16" Projection: 1 1/8" (29 mm) Gauge: 0.125" (3.5 mm)	CMBOPUL3516	US32D
	Pull Plate Solid Bar Round 1000 Series - Meets ANSI 156.6 for J401 Pulls 18 Gauge (0.050") Plate - Clearance from plate to handle: ADA: 1 7/8" Non-ADA: 1 1/2" *ADA - Americans with Disabilities Act Approved	3/4" dia. 6"CTC 2 1/4" Proj. 3.5" x 15"	1000	US32D, US10B, 3
		3/4" dia. 6"CTC 2 5/8" Proj. 4" x 16"	1001	US32D
		3/4" dia. 6"CTC 2 5/8" Proj. 4" x 16"	1001ADA*	US32D
		3/4" dia. 8"CTC 2 1/4" Proj. 3.5" x 15"	1002	US32D, 10B, 3
		3/4" dia. 8"CTC 2 5/8" Proj. 4" x 16"	1003	US32D
		3/4" dia. 8"CTC 2 5/8" Proj. 4" x 16"	1003ADA*	US32D
		1" dia. 8"CTC 2 1/2" Proj. 3.5" x 15"	1004	US32D, 10B, 3
		1" dia. 8"CTC 2 7/8" Proj. 4" x 16"	1005	US32D
		1" dia. 8"CTC 2 7/8" Proj. 4" x 16"	1005ADA*	US32D
		1" dia. 10"CTC 2 1/2" Proj. 3.5" x 15"	1006	US32D, 10B, 3
		1" dia. 10"CTC 2 7/8" Proj. 4" x 16"	1007	US32D
		1" dia. 10"CTC 2 7/8" Proj. 4" x 16"	1007ADA*	US32D
 NEW ITEM	Stainless Steel Pull Plate - With 3/4" "PULL" engraved in black color - BHMA: J401 - Fasteners: a. Round Pull Bar Plates: (6) #6 x 1/2" SS screws; (2) # 1/4"-20 x 2 1/2" Steel screws; (2) Steel washers b. Ellipse Pull Bar Plates: (6) #6 x 1/2" SS screws; (2) # 10-32 x 2 1/4" Steel screws; (2) Steel washers *ADA - Americans with Disabilities Act Approved	3/4" dia. 6"CTC 3 1/2" x 15" Projection: 2 1/4"	PULL1000	US32D
		3/4" dia. 6"CTC 4" x 16"	PULL1001ADA*	
		3/4" dia. 8"CTC Projection: 2 5/8"	PULL1003ADA*	
		1" dia. 8"CTC 4" x 16"	PULL1005ADA*	
		1" dia. 10"CTC Projection: 2 7/8"	PULL1007ADA*	
		ELLIPSE BAR 6"CTC 3 1/2" x 15" Projection: 1 3/4"	PULL001	
		ELLIPSE BAR 6"CTC 4" x 16" Projection: 1 3/4"	PULL002	
 NEW ITEM	Stainless Steel Push Plate - ANSI / BHMA A156.6 - With 3/4" "PUSH" engraved in black color	3 1/2" x 15"	PUSH003	US32D
		4" x 16"	PUSH004	

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOOR PULLS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Solid Bar Round Pull ▶ Stainless Steel, Brass and Aluminum material ▶ Type 1 Thru-Bolt Mount for 1 3/4" thick doors ▶ Individually packed ▶ Easy installation ▶ Architectural finishes available	1" diameter, 10" CTC Projection: 2 1/2"	PUL200	US3, 32D
		1" Diameter, 8" CTC Projection: 2 1/2"	PUL201	
	Solid Bar Round Pull ▶ Stainless Steel, Brass and Aluminum material ▶ Type 1 Thru-Bolt Mount for 1 3/4" thick doors ▶ Individually packed ▶ Easy installation ▶ Architectural finishes available	3/4" Diameter, 10" CTC Projection: 2 1/4"	PUL202	US3, 32D
		3/4" Diameter, 8" CTC Projection: 2 1/4"	PUL203	US3, 10B, US32D, ALUM
		3/4" Diameter, 6" CTC Projection: 2 1/4"	PUL204	US3, 10B, US32D, ALUM
		3/4" Diameter, 5 1/2" CTC Projection: 2 1/4"	PUL205	US3, 15, 10B, US32D, Alum
		5/8" Diameter, 5 1/2" CTC Projection: 2"	PUL206	US3, 10B, US32D, Alum
	Solid Bar Pull Handle ▶ Stainless Steel, Brass and Aluminum material ▶ Type 1 Thru-Bolt Mount for 1 3/4" thick doors ▶ Individually packed ▶ Easy installation ▶ Architectural finishes available	3/8" x 1 1/4", 10" CTC Projection: 2"	PUL207	US3, 10B, US15, 28
		3/8" x 1 1/4", 8" CTC Projection: 2"	PUL208	US3, 10B, US15, 28
		3/8" x 1 1/4", 6" CTC Projection: 2"	PUL209	US3, 10B, US15, 26, 28
	Solid Ellipse Pull Handle ▶ Stainless Steel, Brass and Aluminum material ▶ Type 1 Thru-Bolt Mount for 1 3/4" thick doors ▶ Individually packed ▶ Easy installation ▶ Architectural finishes available	7/8" x 1/2" Ellipse, 5 1/8" CTC Projection: 1 3/4"	PUL210	US3, 28
		3/4" x 1/2" Ellipse, 5 1/2" CTC Projection: 1 3/4"	PUL211	US3, 10B, US15, 15A, 26, US26D, 32D
 NEW ITEM	Heavy Cast Aluminum Door Pull ▶ Exposed Screws ▶ Thru-Bolt option included for heavy duty installation	7 3/8" x 1 1/2" Projection: 2 1/16"	PULL715	Alum, Duro

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOOR KNOCKERS AND VIEWERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Solid Brass Door Knocker ► Conforms to ANSI / BHMA A156.16 L23151 ► Architectural finishes available ► Similar to IVES #3125	Dimensions: 3" x 6 3/8" Screw Holes: 4 1/8" CTC	SBDK356	US3, 5, US10B, US26, 26D, 15, US15A
	Solid Brass Door Knocker With 180° Door Viewer ► Conforms to ANSI / BHMA A156.16 L23151	Bore: 9/16" Size: 3" x 6 3/8" Screw Holes: 4 1/8" CTC For Doors: 1 3/8" - 1 3/4" thick	SBDK / DV180	US3
	Solid Brass Door Knocker ► Conforms to ANSI / BHMA A156.16 L23151 ► Similar to IVES #3102	Dimensions: 2 1/8" x 3 3/4" Screw Holes: 3 3/8" CTC	SSBDK234	US3, 10B, US15
OPTIONAL  	Door Knocker With 160° Viewer ► Conforms to ANSI / BHMA A156.16 L23151 ► Diecast material ► ULDK93 is UL Listed for 90-minute doors ► Architectural finishes available ► UL Listed	For Doors: 1 3/8" - 1 3/4" thick Dimensions: 1 3/4" x 4" Screw Holes: 2 1/2" CTC	DK93 (Non-UL)	US3, 5, 26D, US10B, 15, 15A
			ULDK93 (UL-Listed)	US3, 5, US26D, 15
	Door Knocker With 180° Viewer ► Conforms to ANSI / BHMA A156.16 L23151 ► Diecast material ► Architectural finishes available	Bore: 9/16" Size: 2 3/8" x 5 1/2" For Doors: 1 3/8" - 1 3/4" thick Screw Holes: 3 3/8" CTC Non UL	DK94	US3, 5, 26D, US10B, 15, 15A
	Door Knocker With 160° Viewer w/ Name Card ► Conforms to ANSI / BHMA A156.16 L23151 ► Diecast material ► Architectural finishes available	1/2" Bore Size: 2" x 4 3/4" For Doors: 1" - 1 3/4" thick Screw Holes: 3 3/8" CTC	DKN95	US3, 5

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOOR VIEWERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Brass Door Viewer, 160° Plastic Lens ▶ Conforms to ANSI / BHMA A156,16 L23172 ▶ Architectural finishes available	Bore: 1/2" For Doors: 1 3/8" - 2 1/4" thick	DV90	US3, 5, 26, US26D, 15, US10B
	Brass Door Viewer, 180° Plastic Lens ▶ Conforms to ANSI / BHMA A156,16 L23172 ▶ Architectural finishes available	Bore: 1/2" For doors: 1 3/8" - 2" thick	DV91	US3, 5, 26, US26D, 15, US10B
		Bore: 9/16" For doors: 1 3/8" - 2" thick	DV180	US3, 5, 26, US26D, 15, US10B, 15A
	Door Viewer, 160° Glass Lens ▶ UL Listed For 90-Minute Doors ▶ Conforms to ANSI / BHMA A156,16 L23172 ▶ Architectural finishes available	Bore: 1/2" For doors: 1 3/8" - 2" thick	ULDV160	US3, 15, 26, US26D, 10A, US10B
	Door Viewer, 200° Glass Lens ▶ UL Listed For 90-Minute Doors ▶ Conforms to ANSI / BHMA A156,16 L23172 ▶ Architectural finishes available	Bore : 9/16" For doors: 1 3/8" - 2 1/4" thick	ULDV200	US3, 15, 26, US26D, 10A, US10B
		Bore : 9/16" For doors: 1" - 1 3/8" thick	10ULDV201	US3, 15, US26D, 10B

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOOR VIEWERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
 NEW ITEM	200° Door Viewer with Heavy Duty Privacy Cover ▶ <i>UL Listed for 20 minutes</i> ▶ <i>Architectural finishes available</i>	1" Head diameter Bore: $\frac{9}{16}$" For doors: $1 \frac{3}{8}$" - $2 \frac{1}{4}$" thick	PRIULDV200	US3, 10B, US15, 26, US26D
 COV160 COV200	Door Viewer Cover	Cover: $\frac{1}{2}$" To be used with: DV90, DV91, ULDV160 door viewers	COV160	US3, 15, US10B, US26D
		Cover: $\frac{9}{16}$" To be used with: DV180, ULDV200, ULDV201	COV200	

ELECTRONIC DIGITAL DOOR VIEWER


	Electronic Digital Door Viewer ▶ <i>Supported Existing Door Bores</i> ▶ <i>Fully Integrated Digital Camera and LCD Display</i> ▶ <i>Quick and Easy Installation</i> ▶ <i>Clear Large Image 0.3 Mega Pixels CMOS Resolution</i> ▶ <i>Easy Operation</i> ▶ <i>Convenient for children and elderly</i> ▶ <i>Provides additional privacy</i> ▶ <i>3 x AA Batteries</i>	• $\frac{1}{2}$" - $1 \frac{1}{8}$" Diameter (13mm - 29mm) • 3.5" TFT, (90mm) • 320x240 resolution LCD Viewer - Screen size • 8.5oz (240g) Net Weight	ELDVBEL150	Silver, Duro, Gold
---	---	---	------------	--------------------

DOOR GUARDS

 NEW ITEM	Privacy Door Latch ▶ <i>Zinc Diecast material</i> ▶ <i>Architectural finishes available</i>	Height: $2 \frac{1}{8}$" Width (Base): $1 \frac{1}{2}$" Weight: 0.65 lbs/unit Opening Angle: 87°	HPDL258	US26D, 26, US3, 4, 10B
--	--	---	---------	---------------------------

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOOR GUARDS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Solid Brass Chain Door Guard ▶ Welded solid steel chains to prevent forced entry ▶ Conforms to ANSI / BHMA 156.16 ▶ Architectural finishes available	Chain: 6 3/4"	DG22	US3, US5, US26
	Zinc Diecast Swing Bar Door Guard ▶ Ball Bearing Stop Guide ▶ Diecast material ▶ Architectural finishes available	2 1/16" x 4 1/4"	BBDHG88	US3, 4, 5, US26, 26D, US10B
	Diecast Swing Bar Door Guard ▶ Protective rubber insert on both sides of arm ▶ Architectural finishes available	2 1/2" x 4 1/2"	PDG88	US3, 4, 10B, US26, 26D
	Solid Brass Door Guard Packed With Angle Protector ▶ Ball Bearing stop guide ▶ Packed with Door Angle Protector to avoid scarring the door or frame ▶ Conforms to ANSI / BHMA 156.16 ▶ Architectural finishes available	Arm length: 4 3/4"	SBDG00	US26D, 3, 4, US26, 10B
	Door Angle Protector ▶ Door angle protector comes with adhesive and individual screw for secure mounting ▶ Designed for use with BBDHG88 and PDG88 ▶ Architectural finishes available	Thickness: 0.036" Dimensions: 1/2" x 1" x 1 1/8"	DAP77	US26D, 26, US3, 4, 5, US10B
	Door Guard Shim ▶ To be used when face of door is recessed from face of jamb ▶ Fits under Door Guard ▶ Use with BBDHG88 and PDG88	Dimensions: 5/8" x 2 5/16" Thickness: 1/8"	DGS39	Black
	Door Guard Shim ▶ To be used when face of door is recessed from face of jamb. ▶ Fits under Door Guard sector which attaches to door ▶ Use with SBDG00	Dimensions: 1 1/8" x 1 11/16" Thickness: 1/8"	DGS100	Black


Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

SLIDING DOOR LOCKS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Heavy Duty Privacy Sliding Door Lock Function ▶ Heavy Duty ▶ Privacy sliding door lock function ▶ Easy installation onto pocket-type interior doors with just a simple cut in door edge ▶ Architectural finishes available	Standard Door Prep: 2 1/8" (L) x 1 3/4" (W) can be used on: 1 3/8" and 1 3/4" door thickness	PRIPDL21	US3, 5, 26, US26D, 15, US15A, 10B
	Heavy Duty Passage Sliding Door Lock Function ▶ Heavy Duty ▶ Passage sliding door lock function ▶ Architectural finishes available	Standard Door Prep: 2 1/8" (L) x 1 3/4" (W) can be used on: 1 3/8" and 1 3/4" door thickness	PASPD34	US3, 5, 26, US26D, 15, US15A, 10B
	Privacy Sliding Door Lock ▶ Comparable to Quality No. 101 ▶ Sliding door lock and pull for passageway (pocket) doors ▶ Decorative Coined Edges ▶ Reversible (Non-Handed)	Standard Door Prep: 2 1/4" (L) x 1 3/4" (W) For use on doors: 1 3/8" - 1 3/4" thick Use SDLPIN for 1 3/4" doors	SDL16	US3, 5, 10B, US19, 26, US26D, 15, US15A, US5/26, US3/26
	Passage Sliding Door Lock ▶ Comparable to Quality No. 100 ▶ Sliding door lock and pull for passageway (pocket) doors ▶ Easy installation onto pocket-type interior doors with just a simple cut in door edge	Standard Door Prep: 2 1/4" (L) x 1 3/4" (W) For use on doors: 1 3/8" and 1 3/4" thick	SDL17	US3, 5, 10B, US19, 26, US26D, 15, US15A, US3/26
	Strike ▶ Strike for privacy SDL ▶ Architectural finishes available	Dimensions: 0.046" x 1" x 2 1/4"	STRKSDL	US3, 5, 26, US26D, 15, US15A, 10B

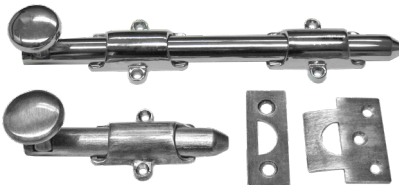

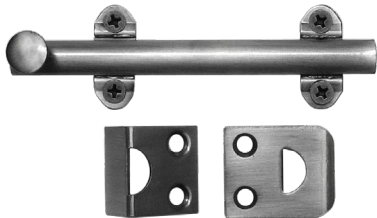
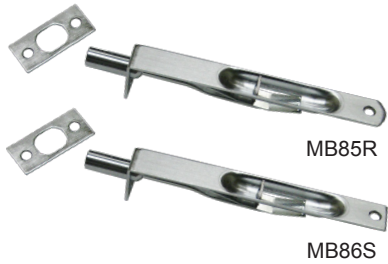
Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

SLIDING DOOR LOCKS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
 NEW ITEM	Privacy Sliding Door Lock ▶ 2 3/8" Backset ▶ With easy pop-up finger pull ▶ Easy installation onto pocket-type interior doors	1 3/8" to 1 3/4" Door Thickness	18SDLR	US10B, 15 US26, 26D
	Privacy Sliding Door Lock ▶ 2 3/4" Backset ▶ With easy pop-up finger pull ▶ Easy installation onto pocket-type interior doors	1 3/8" to 1 3/4" Door Thickness	20SDLR	US26D
 NEW ITEM	Passage Sliding Door Lock ▶ 2 3/8" Backset ▶ With easy pop-up finger pull ▶ Easy installation onto pocket-type interior doors	1 3/8" to 1 3/4" Door Thickness	14SDLR	US10B, 15 US26, 26D
	Passage Sliding Door Lock ▶ 2 3/4" Backset ▶ With easy pop-up finger pull ▶ Easy installation onto pocket-type interior doors	1 3/8" to 1 3/4" Door Thickness	30SDLR	US26D
	Privacy Pocket Door Lock ▶ Auto-catch Lock Mechanism ▶ Fits standard 2 1/8" Door Prep ▶ Easy installation onto pocket-type interior doors	1 3/8" Door Thickness	RSDL20	US3, 5, US10B, 15, US15A, 19, US26, 26D
		1 3/4" Door Thickness	134RSDL20	
	Dummy Pocket Door Lock ▶ Fits standard 2 1/8" Door Prep ▶ Easy installation onto pocket-type interior doors	1 3/8" Door Thickness	RSDL40	US3, 5, US10B, 15, US15A, 19, US26, 26D
		1 3/4" Door Thickness	134RSDL40	

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

SECURITY BOLTS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Solid Brass Decorative Dutch Door Bolt ▶ Heavy Duty with decorative design adapts to any decor ▶ Packed with mortise and universal strikes ▶ 1 1/4" diameter decorative knob ▶ Conforms to ANSI / BHMA 156.16 ▶ Architectural finishes available	4"	DDSB4	US3, 5, 26, US15, 15A, US10B
		8"	DDSB8	
		12"	DDSB12	
		18"	DDSB18	
		24"	DDSB24	
	Angle Strike ▶ Solid Brass Base ▶ Packed with screws ▶ Architectural finishes available	Screw Holes: 1 3/8" CTC	ANGSTRK	US3, 5, 26, US15, 15A, US10B
	Brass Surface Bolt ▶ Brass construction ▶ Packed individually ▶ Poly-bagged with 2 strikes and screws ▶ Architectural finishes available ▶ BHMA LO4151	3"	SB873	US3, 5, 26, US15, 15A, US10B
		4"	SB874	
		6"	SB876	
		12"	SB8712	
	Decorative Surface Bolt ▶ Packed individually ▶ Poly-bagged with 2 strikes and screws ▶ Comparable to IVES #043 ▶ Conforms to ANSI / BHMA 156.16 ▶ Architectural finishes available	4"	DCSB4	US3, 5, 15, US15A, 10B, US26, 26D
		6"	DCSB6	
 MB85R MB86S	Solid Brass Flush Bolts ▶ Designed for superior strength and smooth operation ▶ Deep cup finger hole and double action spring combine to assure ease of operation and automatic holding of bolt in either projected or retracted position ▶ Includes strike and fastener ▶ Architectural finishes available ▶ BHMA LO4201	Bolt Head: Diameter: 1/2" Throw: 1" Length: 6" Width: 3/4"	MB85R (Round Edge)	US3, 5, 10B, US15, 15A, US26, 26D
			MB86S (Square Edge)	
	Strike for MB85R and MB85S ▶ Individually poly-bagged ▶ Packed with 2 screws ▶ Architectural finishes available	Size: 1" x 2" Screw holes: 1 3/8" CTC	STRKMB85R	US3, 5, 15, US15A, 26, US26D, 10B

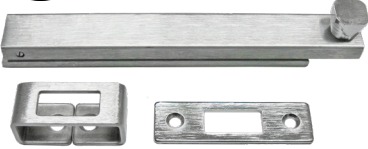
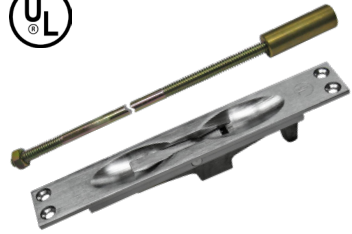
Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

SECURITY BOLTS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Solid Brass Single Route Flush Bolt ▶ Designed for superior strength and smooth operation ▶ Individually poly-bagged ▶ Packed with strike and 2 sets of screws ▶ Architectural finishes available	Dimensions Length: 7" Width: $\frac{3}{4}$ " Bolt Head Diameter: $\frac{5}{16}$ " Throw: $\frac{3}{4}$ "	FBG6	US3, 5, 26, US26D, 15, US15A, 10B
	Strike for FBG6 and FBGEX12 ▶ Individually poly-bagged ▶ Packed with screws ▶ Architectural finishes available	Dimensions $1\frac{1}{2}$ " x $\frac{5}{8}$ " Screw Holes 1" CTC	STRKFBG6	US3, 5, 26, US26D, 15, US15A, 10B
	Solid Brass Single Route Extension Flush Bolt ▶ Rounded at both ends ▶ Designed for superior strength and smooth operation ▶ Individually poly-bagged ▶ Packed with strike and 2 sets of screws ▶ Architectural finishes available	Dimensions Length: $7\frac{1}{2}$ " Width: $\frac{3}{4}$ " Bolt Head Diameter: $\frac{5}{16}$ " Throw: $\frac{7}{8}$ " Rod Length: 18"	FBGEX12	US3, 5, 26, US26D, 15, US15A, 10B
	Flip Style Mortise Flush Bolt ▶ Designed for superior strength and smooth operation ▶ Individually poly-bagged ▶ Packed with strike and 2 sets of screws ▶ Architectural finishes available	Dimensions Length: 7" Width: $\frac{3}{4}$ " Throw: $\frac{3}{4}$ " Strike $1\frac{1}{2}$ " L x $\frac{5}{8}$ " W	FLPFB400	US3, US5, US10B, 15, US15A, 26, US26D
	Flip Style Mortise Flush Bolt with 18" Extension Rod ▶ Designed for superior strength and smooth operation ▶ Individually poly-bagged, packed per pair ▶ Packed with strike and 2 sets of screws ▶ Architectural finishes available	Dimensions: Length: $7\frac{7}{16}$ " Width: $\frac{3}{4}$ " Throw: $\frac{11}{16}$ "; Strike $1\frac{1}{2}$ " L x $\frac{5}{8}$ " W	EXTFB-1	US3, US5, US10B, 15, US15A, 26, US26D
	Solid Brass Single Route Flush Bolt ▶ Designed for superior strength and smooth operation ▶ Deep cup finger hole and double action spring combine to assure ease of operation and automatic holding of bolt in either projected or retracted position ▶ Includes strike and screws ▶ Architectural finishes available	Dimensions Length: $6\frac{3}{4}$ " Width: $\frac{3}{4}$ " Bolt Head Diameter: $\frac{5}{16}$ " Throw: $\frac{3}{4}$ "	ZDFB800	US3, 5, US26, 26D, US15, 10B





Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

SECURITY BOLTS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
 	Commercial Surface Bolts ► Offers tamper-resistant mounting ► Can be used for both in-swinging and out-swinging doors ► Available with both mortise and universal strikes ► Conforms to ANSI / BHMA A156.16, L84161	Dimensions Length: 8"; Width: 1" Bolt Head Diameter: $\frac{5}{16}$ " Throw: 1" Projection: $1\frac{5}{8}$ "	UL453 (SBUL8 before)	US26D
 	Heavy Duty Commercial Surface Bolts ► Offers tamper-resistant mounting ► Can be used for both in-swinging and out-swinging doors ► Available with both mortise and versal strikes ► Conforms to ANSI / BHMA A156.16, L84161	Length: 8"; Width: $\frac{3}{4}$ " Projection: $1\frac{5}{16}$ " Bolt Throw: 1" Length: 12"; Width: $\frac{3}{4}$ " Projection: $1\frac{5}{16}$ " Bolt Throw: 1"	UL831 (ESBUL50 before) UL831-12 (ESBUL12 before)	US26D
 	Solid Brass Lever Extension Flush Bolt (UL Listed) ► Non-handed ► UL Listed for fire-rated metal doors ► Bolt tip is $\frac{1}{2}$" Diameter ► Conforms to ANSI / BHMA A156.6, L14081 ► Optional Rod lengths available: 12", 18", 24", 36", 48" ► Architectural finishes available	Body Length: $6\frac{3}{4}$ "; Width: 1" Depth: $1\frac{1}{8}$ " Guide Length: 2"; Width: 1" Thickness: $\frac{5}{64}$ " Strike Length: $2\frac{1}{4}$ "; Width: $\frac{15}{16}$ " Thickness: $\frac{3}{32}$ " Rod: $\frac{1}{4}$ " - 20 Threaded	MF6341	US3, 4, 5, US19, 10, US10B, 15, US15A, 26, US26D Almond, White
 NEW ITEM	Strike for MF6341 ► Individually poly-bagged ► Packed with screws ► Architectural finishes available	Dimensions: $2\frac{1}{4}$ " x $\frac{15}{16}$ " Thickness: $\frac{3}{32}$ " Screw Holes $1\frac{5}{8}$ " CTC	STRKMF	US3, 10B, US15, 26, US26D
 	Solid Brass Commercial Wood Lever Extension Flush Bolt ► Commercial Type ► $\frac{5}{8}$" Throw ► Especially designed for wood or composite doors ► Conforms to ANSI / BHMA A156.6, L14081 ► Architectural finishes available	Body Length: $6\frac{3}{4}$ "; Width: 1" Depth: $1\frac{1}{4}$ " Guide Length: $2\frac{1}{2}$ "; Width: 1" Thickness: $\frac{5}{64}$ " Strike Length: $2\frac{1}{4}$ "; Width: 1" Thickness: $\frac{5}{64}$ "	WF6341	US3, 10B, US26, 26D, US15, 15A
	Stamped Brass Commercial Manual Flush Bolt ► Non-handed ► Stamped Brass Design ► Bolt tip is $\frac{1}{2}$" Diameter ► Optional Rod lengths available 18", 24", 36", 48" ► Architectural finishes available	Body Length: $6\frac{3}{4}$ "; Width: 1" Depth: $1\frac{1}{4}$ " Guide Length: 2"; Width: 1" Thickness: $\frac{5}{64}$ " Strike Length: $2\frac{1}{4}$ "; Width: 1" Thickness: $\frac{5}{64}$ "	SBFB825	US3, 10B, US15, 26D

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

AUTO FLUSH BOLTS

AUTOFLM1	AUXAUTOFLM1	AUTOFLW22	AUXAUTOFLW22	SLAUTOFLM3	SLAUTOFLW4	AUXSLAFLM3	AUXSLAFLW4			
 TOP BOLT BOTTOM BOLT	 TOP BOLT AUXILIARY FIRE LATCH	 TOP BOLT BOTTOM BOLT	 TOP BOLT AUXILIARY FIRE LATCH	 TOP BOLT BOTTOM BOLT	 TOP BOLT BOTTOM BOLT	 TOP BOLT AUXILIARY FIRE LATCH	 TOP BOLT AUXILIARY FIRE LATCH			
FEATURES AND CONSTRUCTION			AUTOFLM1	AUXAUTOFLM1	AUTOFLW22	AUXAUTOFLW22	SLAUTOFLM3	SLAUTOFLW4	AUXSLAFLM3	AUXSLFLW4
UL Listed for (A, B, C, D and E Label) metal fire doors, maximum 8' in height. Conforms to UL10C and UBC 7-2-1997.			✓	✓			✓		✓	
UL Listed for (B, C, D and E Label) wood composite core fire doors, maximum 8' in height. Conforms to UL10C and UBC 7-2-1997.					✓	✓		✓		✓
Fits standard and ANSI preparation for wood doors.					✓	✓		✓		✓
Fits standard and ANSI preparation for metal doors.			✓	✓			✓		✓	
Override feature, prevents damage to doors of frame in case the strike and bolt are not aligned.			✓	✓	✓	✓	✓	✓	✓	✓
Reversible, Non-Handed.			✓	✓	✓	✓	✓	✓	✓	✓
Steel body with stainless steel components, especially designed thermal lock automatically locks inactive door in case of fire.			✓	✓	✓	✓	✓	✓	✓	✓
Smooth easy action, requires 5 lbs of force to actuate cam and piston mechanism, therefore meeting ADA regulations.			✓	✓	✓	✓	✓	✓	✓	✓
Fully automatic, when active door is opened top and bottom bolts are automatically retracted for easy egress. When active door is closed ¾" bolt projects into the frame, securing latching of inactive leaf.			✓	✓	✓	✓	✓	✓	✓	✓
Bolts have 1" vertical adjustment without removing door from frame for unusual conditions.					✓	✓		✓		✓
Bolts have ¾" vertical adjustment without removing door from frame for unusual conditions.			✓	✓			✓		✓	
Available in Architectural Finishes. Packed 2 bolts per box with composite installation template.			✓		✓		✓	✓	✓	
Available in Architectural Finishes. Packed 1 top bolt and 1 auxiliary fire latch per box with composite installation template. Used where a fire-rating application without a bottom bolt is required. The auxiliary fire latch, mounted in the door edge, releases under extremely high temperatures to keep the doors in alignment during a fire.				✓		✓			✓	✓

UNIVERSAL FLUSH BOLTS

UNIVERSAL AUTOMATIC FLUSH BOLT		UNIVERSAL SELF-LATCHING FLUSH BOLT		UNIVERSAL FLUSH BOLT & BOTTOM FIRE LATCH BOLT		
UNIFB820		UNIFB780		UNIFB930	UNIFB540	
 UNIFB810 TOP BOLT UNIFB810 BOTTOM BOLT		 UNIFB710 TOP BOLT UNIFB810 BOTTOM BOLT		 UNIFB710 TOP BOLT UNIFL001 BOTTOM FIRE LATCH BOLT	 UNIFB810 TOP BOLT UNIFL001 BOTTOM FIRE LATCH BOLT	
FEATURES & CONSTRUCTION			UNIFB820	UNIFB780	UNIFB930	UNIFB540
UL Listed for (A, B, C, D and E Label) metal fire doors, maximum 8' in height. Conforms to UL10C and UBC 7-2-1997.			✓	✓	✓	✓
UL Listed for (B, C, D and E Label) wood composite core fire doors, maximum 8' in height. Conforms to UL10C and UBC 7-2-1997.			✓	✓	✓	✓
Fits standard and ANSI preparation for wood doors.			✓	✓	✓	✓
Fits standard and ANSI preparation for metal doors.			✓	✓	✓	✓
Override feature, prevents damage to doors of frame in case the strike and bolt are not aligned.			✓	✓	✓	✓
Reversible, non-handed.			✓	✓	✓	✓
Steel body with stainless steel components, especially designed thermal lock automatically locks inactive door in case of fire.			✓	✓ (bottom only)		✓
Fully automatic, when active door is opened top and bottom bolts are automatically retracted for easy egress. When active door is closed ¾" bolt projects into the frame, securing latching of inactive leaf.			✓	✓ (bottom only)		✓
Bolts have 5/8" vertical adjustment without removing door from frame for unusual conditions.			✓	✓	✓	✓
Available in Architectural Finishes. Packed 2 bolts per box with composite installation template.			✓	✓		
Available in Architectural Finishes. Packed 1 top bolt and 1 auxiliary fire latch per box with composite installation template. Used where a fire-rating application without a bottom bolt is required. The auxiliary fire latch, mounted in the door edge, releases under extremely high temperatures to keep the doors in alignment during a fire.					✓	✓

DOOR COORDINATORS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	UL-Gravity Coordinator ► Used on pairs of doors with or without an astragal ► Adjustable for ease of installation ► It features a Nylon Roller to enable the inactive door to easily operate the coordinating device ► Base Material: Forged Brass ► Architectural finishes available ► BHMA: 4.1.1 Type 25	Projection: 7"	FRGCO65	US26D, 10B, US3, 4, 5, US10, 26
		Projection: 8"	FRGCO085	
	Door Coordinator ► Door coordinator for fire labeled doors ► Automatic coordinating device for sequential closing of paired doors with or without astragal ► Non-handed. ► For use with frame openings 60", 72" or 84". ► Material: All Metal construction ► Conforms to ANSI / BHMA A156.3, Type 21A	Frame Openings: 60" and 72"	DORCO1	Black Prime Coat, Alum
		18 ⁵ / ₈ " for up to 72" door	FB1858	
		32 ⁵ / ₈ " for up to 96" door	FB3258	
	Carry Bar ► Used on pair of doors with astragal ► For situations when the inactive door can be opened first.	Plate: 1 ³ / ₄ " x 2 ¹ / ₄ " Fasteners: 1/4" x 20 Sex Bolts	CBO-1	Black Prime Coat, Alum
	Mounting Brackets	Jamb Depth: 4 ¹ / ₄ " Stop Height: ⁵ / ₈ " Stop Width: 2 ¹ / ₄ " and over	MB4250	Black Prime Coat
		Jamb Depth: 4 ³ / ₄ " Stop Height: ⁵ / ₈ " Stop Width: 7/8" to 2 ¹ / ₄ " and over	MB4750	


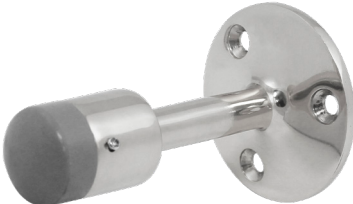
Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

HANDRAIL BRACKETS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Jumbo Heavy Duty Handrail Bracket ▶ Diecast Aluminum material ▶ Contemporary design ▶ Single screw wall mount for minimal damage to wall ▶ Individually poly-bagged ▶ Packed with mounting screws ▶ Easy installation ▶ Conforms to ANSI / BHMA A156.16 L13061 ▶ Architectural finishes available	Wall Mount: 2 1/8" dia. Height: 2 7/8" Width: 2 1/8" Projection: 2 7/8"	JUHB-28	US3, 5, US15, 15A, US26, 10B
	Handrail Bracket ▶ Diecast material ▶ Individually poly-bagged with screws ▶ Conforms to ANSI / BHMA A156.16 L33061 ▶ Architectural finishes available	Height: 2 7/8" Width: 1 3/16" Projection: 2 7/8"	HB96	US3, 5, US15, 15A, US26, 10B, US26D
	Heavy Duty Cast Aluminum Handrail Bracket ▶ Diecast material ▶ Individually poly-bagged with screws ▶ Conforms to ANSI / BHMA A156.16 L33061 ▶ Architectural finishes available	Height: 3 1/4" Width: 1 7/16" Projection: 3 1/4"	HDHB40	US3, 5, US15, 15A, US26, 26D, US10B
	Heavy Duty Handrail Bracket ▶ Diecast material ▶ Contemporary design ▶ Individually poly-bagged with screws ▶ Easy installation ▶ Conforms to ANSI / BHMA A156.16 L13061 ▶ Architectural finishes available	Height: 2 3/4" Width: 1 3/8" Projection: 3 1/4"	DMHB83	US3, 10B, US15, 15A, US26D, 26
	ADA-APPROVED Heavy Duty Cast Handrail Bracket ▶ Conforms and Meets ADA Regulations ▶ Conforms to ANSI / BHMA A156.16 L13061 ▶ Diecast material ▶ Contemporary design ▶ Individually poly-bagged with screws ▶ Easy installation	Height: 3 1/2" Width: 1 5/16" Projection: 4"	ADAHB-4	US3, 5, US10B, 15, US15A, 26, US26D

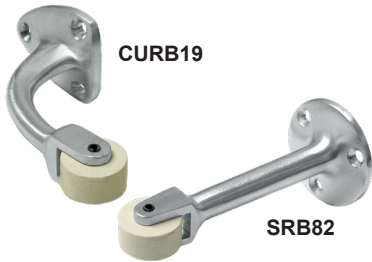

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

WALL DOOR STOPS / BUMPERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Stainless Steel Concave Wall Stop ▶ Manufactured using Stainless Steel or Solid Brass ▶ Conforms to ANSI / BHMA 156.16 L22251 for Brass and L52251 for Stainless Steel ▶ Architectural finishes available	Base Diameter: 2 1/2" Base Thickness: 3/8" Overall Proj.: 1 3/16"	WB26	US32D, 3, 4, US5, 15A, US26, 10, US10B, 19
	Stainless Steel Convex Wall Stop ▶ Manufactured using Stainless Steel or Solid Brass ▶ Conforms to ANSI / BHMA 156.16 L22201 for Brass and L52101 for Stainless Steel ▶ Architectural finishes available	Base Diameter: 2 1/2" Base Thickness: 3/8" Overall Proj.: 1 3/16"	CONWB42	US32D, 3, US4, 26, 10, US10B
	Solid Brass Convex Wall Stop ▶ Constructed of Solid Brass ▶ Tamper-proof mounting ▶ Included with grey convex rubber bumper that absorbs impact ▶ Comparable to IVES #WS404CVX ▶ Architectural finishes available	Base Diameter: 1" Overall Proj.: 1/2"	SWB	US3, 4, 15, US15A, 26, US26D, 10B, US19
	Commercial Grade Wall Door Stop ▶ For high traffic conditions ▶ Solid Cast Brass or Bronze heavy duty construction ▶ Rubber tip does not scar nor mark surface of door ▶ Conforms to ANSI: A156.16, BHMA: L12021, FED SPEC:1320E ▶ Architectural finishes available	Base Diameter: 2" Overall Proj: 3 5/8"	CWS18	US3,26D, US10B
 NEW ITEM	Commercial Grade Wall Door Stop ▶ For high traffic conditions ▶ Solid Cast Brass ▶ Conforms to ANSI: A156.16, BHMA: L12021, FED SPEC:1320E ▶ Architectural finishes available ▶ With 3 mounting holes	Base Diameter: 2 1/8" Overall Proj: 3 5/8" Fastener: #10 x 1" OPHWS w/ plastic anchor	4CWS-21	US26D, US10B


Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

WALL DOOR STOPS / BUMPERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
 CURB19 SRB82	Solid Brass Roller Stop ▶ Constructed in heavy duty Cast Brass ▶ CURB19 is used where two doors open against each other to prevent damage to the door or hardware ▶ CURB19 conforms to ANSI / BHMA 156.16, L12212	Base: 1 3/4" x 2 1/8" Overall Proj: 2 3/4"	CURB19	US3, 4, US10B, US26D
		Base Dia: 2" Overall Height: 4 1/4"	SRB82	
	Solid Brass Rigid Door Stop with Molded Screw ▶ Easy installation ▶ Packed with both white and black rubber tip ▶ Available in architectural finishes	Mounting Screw: 1" Projection: 3"	SBRS3	US3, 5, 26, US26D, 15, US15A, US10B
		Mounting Screw: 1" Projection: 4"	SBRS4	
	Flexible Door Stop with Fixed Screw ▶ Diecast base ▶ One Piece Style ▶ Packed with white rubber tip ▶ Available in architectural finishes	Mounting Screw: 3/4" Projection: 3"	FS89	US3, 5, 15, US15A, 26, US10B
	Cast Rigid Door Stop with Molded Screw ▶ Easy installation ▶ Diecast material ▶ Available in architectural finishes	Mounting Screw: 5/8" Projection: 3"	RS92	US3, 5, 26, US26D, 15, US15A, US10B
	Heavy Duty Flexible Snap On Door Stop 3 Pieces ▶ Steel Base ▶ White Rubber Tip ▶ Available in architectural finishes ▶ Comparable to IVES #060	Mounting Screw: 1 1/2" Projection: 3"	SOFS3	US3, 5, 26, US10B, US15A, 15
	Heavy Duty Flexible Door Stop with Screw and Metal Base ▶ Easy installation ▶ Available in architectural finishes	Mounting Screw: 3/4" Projection: 3 1/8"	HDFS3	US3, 5, 26, US15, 15A, US10B
		Mounting Screw: 3/4" Projection: 3 3/4"	JFS13	
	4" Diecast Jumbo Rigid Stop with Molded Screw ▶ Diecast material ▶ Conforms to ANSI / BHMA A156.16	Mounting Screw: 3/4" Projection: 4"	JRS34	US3, 5, 26, US15, 15A, US10B
 NEW ITEM	Wall Stop with Plate, Round ▶ Stainless Steel wall mount ▶ Easy installation ▶ It can also be used as coat hook ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #4 x 1" Projection: 3 1/8"	WSPR-02	US32D, US32

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

WALL DOOR STOPS / BUMPERS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
 NEW ITEM	Wall Stop No Plate ▶ Stainless Steel ▶ Wall mount ▶ Easy installation ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #10 x 1 1/2" Projection: 2 7/8"	WSNP-04	US32D, US32
 NEW ITEM	Wall Stop with Plate, Square ▶ Stainless Steel ▶ Wall mount ▶ Easy installation ▶ It can also be used as coat hook ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #6 x 1" Projection: 3 1/8"	WSPS-01	US32D, US32
 NEW ITEM	Wall Bumper Concave ▶ Stainless Steel ▶ Wall mount ▶ Easy installation ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #8 x 1" Projection: 19/16"	WBC-06	US32D, US32

FLOOR DOOR STOPS

	Floor Stops ▶ Commercial grade wall floor stop for high traffic conditions. Solid Cast Brass or Bronze heavy duty construction ▶ Architectural finishes available ▶ Conforms to ANSI: A156.16, BHMA:L12131, FED SPEC:1328E	Base Diameter: 2" Overall Height: 3"	CFS20	US3, 26D, US10B
 NEW ITEM	Floor Stops ▶ Commercial grade wall floor stop for high traffic conditions. Solid Cast Brass. ▶ Architectural finishes available ▶ Conforms to ANSI: A156.16, BHMA:L12131, FED SPEC:1328E ▶ With 3 mounting holes	Base Diameter: 2 1/4" Overall Height: 3 1/8" Fastener: #10 x 1" OPHWS w/ plastic anchor	3CFS-85	US26D, US10B
 NEW ITEM LSDC-315 SDC-115	Security Door Stops ▶ Designed for high traffic, abusive and security applications ▶ Flame resistant, resilient material molded around a heavy duty stud	Stud Dimensions: 5/8" x 2 1/2" Bumpers: 2" dia. x 3 1/2" h	LSDC-315	Black
		Stud Dimensions: 5/8" x 2 1/2" Bumpers: 2" dia. x 1 1/2" h	SDC-115	


Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

FLOOR DOOR STOPS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Goose Neck Floor Stop ▶ Heavy Duty Cast Brass floor stop ▶ Smooth and aerodynamic design provides minimum obstruction to cleaning efforts ▶ Conforms to ANSI / BHMA 156.16, L12131 for Brass ▶ Architectural finishes available	Base Depth: 1 3/4" Overall Height: 2 1/8" Overall Length: 2 1/4"	GS118	US3, 4, 5 US26, 26D, US10,10B, US15, 15A
	Goose Neck Floor Stop ▶ Heavy Duty Cast Brass floor stop ▶ Smooth and aerodynamic design provides minimum obstruction to cleaning efforts ▶ Conforms to ANSI / BHMA 156.16, L12131 for Brass ▶ Architectural finishes available	Base Depth: 1 3/8" Overall Height: 2 3/4" Overall Length: 2 1/2"	GS119	US3, 4, 5, US26, 26D, US10,10B, US15, 15A
	Small Goose Neck Floor Stops ▶ For light to medium duty doors ▶ Easy installation ▶ Durable vinyl rubber stops that comes in black or grey ▶ Solid Brass material ▶ Architectural finishes available	Height: 1 1/4"; Base: 1 1/8"; Projection: 1 1/4"	SMGNS-1	US3, US5, US10B, 15, US15A, 26, US26D
 DSHP18 DSLP4	Floor Dome Stops ▶ For doors with threshold or undercut doors ▶ Heavy Duty Cast Dome Stops constructed of Solid Brass ▶ DSHP18 conforms to ANSI / BHMA 156.6, L12141 Low profile ▶ DSLP4 conforms to ANSI / BHMA 156.6, L12161 High Profile ▶ Architectural finishes available	Base Height: 3/8" Overall Height: 1 3/8" Base Diameter: 1 3/4"	DSHP18	US3, 4, 5, US10, 10B, US15, 15A, US26, 26D, US32D
		Base Height: 1/8" Overall Height: 1" Base Diameter: 1 3/4"	DSLP4	
	Heavy Duty Dome Stop ▶ Heavy Duty Cast Brass dome stop designed for both low and high profiles. ▶ Meets ANSI / BHMA 156.1, L12161 when used as DSLP4	Base Diameter: 1 3/4" Base: 1/4" Height: 1 5/8" Fastener: #14 x 1 1/2" wood screw w/ plastic shield and 1/4" - 20 x 3/4" machine screw with lead anchor	UNDS14	US3, 4, 5, US10,10B, US15, 26, US26D
 RIS375 RIS625	Risers ▶ Extruded Aluminum, mill finish ▶ For conversion of DSHP18 or DSHP18 Dome Stop for carpet installation ▶ Available in 3/8" and 5/8" height	Length: 1 3/4" Width: 1 1/8" Height: 3/8"	RIS375	US26D
		Length: 1 3/4" Width: 1 1/8" Height: 5/8"	RIS625	

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

FLOOR DOOR STOPS


ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Risers ▶ Heavy Duty Diecast construction ▶ For conversion of DSLP4 or DSHP18 Dome Stop for carpet installation or adapting to threshold use ▶ Conforms to ANSI / BHMA 156.1, L12161 when used with DSLP4 ▶ Architectural finishes available	Base Diameter: 1 3/4" Height: 5/16"	NEWRIS3750	US3, 4, 5, US10, 10B, US15, 15A, US26, 26D
 NEW ITEM	Cylindrical Floor Mount Door Stop ▶ Stainless Steel ▶ Floor mount ▶ Easy installation ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #4 x 1 1/2" Projection: 1 9/16"	EUS-03	US32D, US32
 NEW ITEM	Square Floor Mount Door Stop ▶ Stainless Steel ▶ Floor mount ▶ Easy installation ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #4 x 1 1/2" Projection: 1 9/16"	EUS-05	US32D, US32
 NEW ITEM	Floor Mount or Wall Mount Door Stop ▶ Stainless Steel ▶ Floor mount or wall mount ▶ Easy installation ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #8 x 1 1/4" Projection: 2"	EUS-07	US32D, US32
 NEW ITEM	Door Stop Flat Top ▶ Stainless Steel door stop ▶ Floor Mount ▶ Easy installation ▶ Durable rubber tip ▶ Residential and light commercial use	Wood Screw w/ plastic plug: #10 x 1 1/4" Projection: 13/16"	DSFT-5	US32D, US32

DOOR HOLDER / STOPS

	Solid Brass Kick Down Door Holder ▶ Black / Grey Vinyl rubber stop with concentric groove design for maximum non-slide grip (#RUBSBDH) ▶ Conforms to ANSI / BHMA 156.16, L11383 ▶ Available in architectural finishes	Arm: 5" Base: 1 1/4" x 2"	SBDH41300	US26, 3, 4, US26D, 10, US10B
	Vinyl Rubber Stop for SBDH41300 and SBDH5 ▶ Vinyl rubber stop with concentric groove design for maximum non-slide grip ▶ For use as replacement tip for SBDH41300 and SBDH5	Base Dia: 1 1/8"	RUBSBDH	Grey

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOOR HOLDER / STOPS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Zinc Diecast Kick Down Door Holder - Vinyl rubber stop with concentric groove design for maximum non-slide grip (#RUBDH25) - Architectural finishes available	Arm: 4" Base: 7/8" x 1 3/4"	DH25	US3, 26, US26D, Duro
	Vinyl Rubber Stop for DH25 - Vinyl rubber stop with concentric groove design for maximum non-slide grip - For use as replacement tip for DH25	Base Dia: 1 1/8"	RUBDH25	Grey
 	Cast Iron Kick Down Door Holder - Black / Grey Vinyl rubber stop with concentric groove design for maximum non-slide grip - Conforms to ANSI / BHMA 156.16, L11383	Arm: 4"	IRODH-4	Alum, Duro
		Arm: 5"	IRODH-5	
	Solid Brass Kick Down Door Holder - Vinyl rubber stop with concentric groove design for maximum non-slide grip (#RUBSBDH) - Conforms to ANSI / BHMA 156.16, L11382 - Comparable to IVES #FS455 - Architectural finishes available	Arm: 5" Base: 7/8" x 1 3/4"	SBDH5	US3, 26D, US10, 10B, US26
	Heavy Duty Commercial Grade Wall Door Stop - For high traffic conditions - Solid Cast Brass or Bronze heavy duty construction - Unit functions as stop but serves as a Hold-Open device when hook is manually engaged in strike - Conforms to ANSI / BHMA 156.16, BHMA:L11351 for Brass, FED SPEC:1321E - Architectural finishes available	Base Diameter: 2 1/4" Projection: 3 5/8" Strike Height: 1 1/2" Strike Width: 1 3/16" Strike Projection: 1" Hook: 2 3/4" Eye: 1 3/8" x 1 1/8"	HDWDS99	US3, 26, US26D, US10B
	Floor Door Stop & Manual Holder - Solid Cast Brass or Bronze heavy duty construction - Unit functions as stop but serves as a Hold-Open device when hook is manually engaged in strike - Conforms to ANSI / BHMA 156.16, BHMA:L11371, FED SPEC:1329E - Architectural finishes available	Base Diameter: 2" Height from floor to stop centerline: 2 5/8" Stop Dia: 1" Hook: 2 5/8" Eye: 1" x 1 1/2" Overall Height: 3 5/8"	HDFDSH66	US3, 26D, US10B, 26

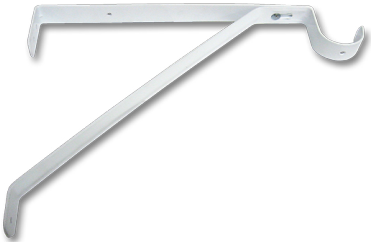

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

HINGE PIN DOOR STOPS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Jumbo Heavy Duty Hinge Pin Door Stop with Removable Nylon Bushing ▶ Adjustable angle setting ▶ For commercial and residential grade hinges ▶ Comparable to IVES #69, 69F	Hinge Pin Diameter $\frac{1}{4}$ " or $\frac{5}{16}$ " HINGE SIZES: $3\frac{1}{2}$ " x $3\frac{1}{2}$ ", 4" x 4", $4\frac{1}{2}$ " x $4\frac{1}{2}$ "	IVHP23 (Commercial and Residential use)	US3, 5, 26, US26D, 15, US15A, 10B
	Jumbo Hinge Pin Door Stop with Removable Nylon Bushing ▶ Easy installation ▶ For use with commercial and residential door hinges ▶ Architectural finishes available	Hinge Pin Diameter $\frac{1}{4}$ " or $\frac{5}{16}$ " HINGE SIZES: $3\frac{1}{2}$ " x $3\frac{1}{2}$ ", 4" x 4", $4\frac{1}{2}$ " x $4\frac{1}{2}$ "	JHP11 (Commercial and Residential use)	US3, 5, 26, US15, 15A, US10B
	Deluxe Hinge Pin Door Stop with Removable Nylon Bushing ▶ Easy installation ▶ For use with residential door hinges ▶ Architectural finishes available	Hinge Pin Diameter: $\frac{1}{4}$ " HINGE SIZES: $3\frac{1}{2}$ " x $3\frac{1}{2}$ ", 4" x 4"	NHP78 (Recommended for Residential use)	US3, 5, 26, US26D, 15, US15A, 10B
 DSLD81 DSHD105	Hinge Pin Stop with Removable Nylon Bushing ▶ Adjustable angle setting ▶ Comparable to IVES #69, 69F ▶ Architectural finishes available	Hinge Pin Diameter $\frac{1}{4}$ " or $\frac{5}{16}$ " HINGE SIZES: $3\frac{1}{2}$ " x $3\frac{1}{2}$ ", 4" x 4"	DSLD81 (Recommended for Residential use)	US3, 5, 10B, US15, 15A, US26, 26D
		Hinge Pin Diameter $\frac{1}{4}$ " or $\frac{5}{16}$ " HINGE SIZES: $3\frac{1}{2}$ " x $3\frac{1}{2}$ ", 4" x 4, 4 $\frac{1}{2}$ " x $4\frac{1}{2}$ "	DSHD105 (Recommended for Commercial use)	
	Residential Hinge Pin Door Stop with Removable Nylon Bushing ▶ Easy installation ▶ For use on residential hinges ▶ Architectural finishes available	Hinge Pin Diameter: $\frac{1}{4}$ " HINGE SIZES: $3\frac{1}{2}$ " x $3\frac{1}{2}$ ", 4" x 4"	HP95 (Recommended for Residential use)	US3, 5, 26, US15, 15A, US10B



Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

CLOSET HARDWARE

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Oval Closet Rod ▶ Steel material ▶ Available in 2 lengths ▶ Individually poly-bagged	8' Closet Rod Dimensions: $\frac{5}{8}$ " x $1 \frac{3}{16}$ "	OVLCLR-408	US26
		12' Closet Rod Dimensions: $\frac{5}{8}$ " x $1 \frac{3}{16}$ "	OVLCLR-5012	US26
	Closet Rod Bracket ▶ Zinc Alloy material ▶ Packed 2 pieces in nylon bag with screws	Dim: $1 \frac{1}{4}$ " CTC Projection: $\frac{1}{2}$ " Fasteners: #6 x 1" Wood Screws	OVLCRB-10	US26
	Closet Rod Holder ▶ Zinc Alloy material ▶ Individually packed in nylon bag with screws	Dim: $1 \frac{1}{4}$ " CTC Projection: 3" Fasteners: #6 x 1" Wood Screws	OVLCRH-20	US26
	Adjustable Closet Rod ▶ Sturdy Steel material ▶ Individually poly-bagged with installation screws ▶ Gauge: 0.050" ▶ Adjustable rods in various lengths ▶ Zinc finish	10" to 30"	ACR1830	Bright Zinc
		30" to 48"	ACR3048	
		48" to 72"	ACR4872	
		72" to 96"	ACR7296	
		72" to 120"	ACR72120	
		96" to 150"	ACR96150	
	Adjustable Shelf and Rod Support ▶ Sturdy Steel material ▶ Individually poly-bagged ▶ Screws packed individually with bracket	Support shelf up to 14" wide Rod up to $1 \frac{1}{2}$ " dia.	ASR-41	White
	Adjustable Shelf Support ▶ Sturdy Steel material ▶ Individually poly-bagged ▶ Screws packed individually with bracket	Support shelf up to 14" wide	ADJ42	White
	Single Shelf and Rod Support ▶ Sturdy Steel material ▶ Individually poly-bagged ▶ Screws packed individually with bracket	Support shelf up to 14" wide Rod up to $1 \frac{1}{2}$ " dia.	SR27	White



Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

CLOSET HARDWARE

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Heavy Duty Shelf and Rod Support ▶ Easy installation ▶ Individually poly-bagged ▶ Architectural finishes available	Support shelf up to 14" wide Rod up to 1 1/2" dia.	FSR123	White
	Closet Pole Socket ▶ Nylon material ▶ Paired Set	1 3/8" Pole	PS99	White
	Steel Closet Pole Socket ▶ Sturdy Steel material ▶ Paired Set	1 3/8" Pole	MPS3	US3, 26
	Wood Closet Pole Socket ▶ Natural Wood material ▶ Paired Set	1 3/8" dia.	WDPS 82	Wood Grain
	Jumbo Roller Catch ▶ Steel Construction ▶ Conforms to ANSI / BHMA A156.9 B83112	Size 2" Strike: 1 1/4" x 7/8" Square Corner	RC88	US3, 10B, Zinc
	Solid Brass Adjustable Ball Catches ▶ Manufactured from Wrought Brass ▶ Adjustable threaded barrel for accommodating various door clearances ▶ Conforms to ANSI / BHMA A156.9 B23013 ▶ Architectural finishes available	Face Plate: 2 1/8" x 1" Round Corner Bore: 3/4" x 1 1/4" Square Lip Strike: 1 3/8" x 2 1/8" Lip to Center: 7/8"	SBBC58 (Brass)	US3, 5, 10B US15, 15A, US26, 26D
 BC97 STRKBC97	Adjustable Ball Catch ▶ Manufactured from Wrought Brass ▶ Adjustable threaded barrel for accommodating various door clearances ▶ Conforms to ANSI / BHMA A156.9 B23013 ▶ Architectural finishes available	Face Plate: 2 1/4" x 1" Square Corner Bore: 7/8" x 1 1/4" Round Corner Strike: 1 3/8" x 2 1/4" Lip to Center: 7/8"	BC97 (Diecast)	US3, 5, 10B US15, 15A, US26, 26D
		Full Lip Strike Plate Round Corner for BC97 and DIB1 Size: 1 3/8" x 2 1/4"	STRKBC97	



Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

CLOSET HARDWARE

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Adjustable Drive-In Ball Catches ▶ Generally used on closet doors where latch is not used or needed ▶ Diecast material ▶ Jamb-mounted lip strike ▶ Conforms to ANSI / BHMA A156.9 B23013 ▶ Architectural finishes available	$\frac{15}{16}$ " Bore Strike Size: $1 \frac{3}{8}$ " x $2 \frac{1}{4}$ ", Round Corner	DIB1	US3, 5, 26, US26D, 15, US15A, 10B
			BLKDIB777 (Bulk Packed)	
	Adjustable Roller Catch ▶ Soft latching action. Speed nylon roller for maximum performance ▶ Adjustable tension 4 – 17 lbs of holding power. Installs easily on thin doors. Includes Brass full lip strike ▶ Conforms to ANSI / BHMA A156.16 L27081 for Brass and L87081 for Steel	Face Plate: $2 \frac{1}{4}$ " x $\frac{7}{8}$ " Bore: $\frac{13}{16}$ " x $1 \frac{3}{4}$ " Strike: $2 \frac{1}{4}$ " x $1 \frac{3}{4}$ " Lip to Center: $\frac{13}{16}$ "	ARCT3350	US3, 26D, 15, US10B
	Bullet Catch ▶ Ideal for cabinets and small door installations ▶ Made from Wrought Brass ▶ Architectural finishes available	Hole (door): $\frac{1}{2}$ " dia. X $1 \frac{1}{8}$ " Strikes (Square): $\frac{5}{8}$ " x $1 \frac{1}{4}$ " Strikes (Round): $1 \frac{3}{8}$ " x $2 \frac{1}{4}$ "	BULCAT11	US3, 5, 26, US15, 10B
	T-Strike for BULCAT11 ▶ Natural Wood material ▶ Paired Set	T-Strikes (optional): $\frac{7}{8}$ " x $2 \frac{1}{4}$ "	TCAT108	US3, 5, 26, US15, 10B
	Solid Brass Drawer Pull ▶ Includes Screws for $1 \frac{3}{4}$" – $1 \frac{3}{8}$" thick drawers or doors ▶ Conforms to ANSI / BHMA A156.9 B22011 ▶ Architectural finishes available	Dia. of Rod : 3 ", $\frac{5}{16}$ "	WP300	US3, 26, 26D, US10B
		Dia. of Rod: $3 \frac{1}{2}$ ", $\frac{5}{16}$ "	WP350	
		Dia. of Rod: 4 ", $\frac{5}{16}$ "	WP400	


Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

CLOSET HARDWARE



ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Heavy Duty Magnetic Catch - Dual triple pole. Self-aligning magnets for maximum pull surface or mortise mounted steel case - Individually packed with sheet metal screws, 3 strikes - Conforms to ANSI / BHMA A156.9 B4316	Length: 3 1/8" Thickness: 7/8" Depth: 1" Load Capacity: 14 lbs.	HDMC3270	Aluminum
	Triple Pole Magnetic Catch - Triple pole. Self-aligning magnets for maximum pull. Adjustable steel case - Individually packed with sheet metal screws, 1 strike size - Conforms to ANSI / BHMA A156.9	Length: 2 1/16" Thickness: 7/8" Depth: 1 5/32" Load Capacity: 6 lbs.	TPMC3230	Aluminum
	Bi-Fold Ball Knob - Diecast material - Packed with 1 breakaway screw to accommodate different cabinet thickness (from 1 5/8" to 2") and one 1 3/4" screw - Architectural finishes available	Diameter: 1 1/4" Height: 1 3/8"	BK14	US3, 5, 26, US26D, 15, US15A, 10B
	Back Plate for BK14 Bi-fold Ball Knob - Diecast material - Conforms to ANSI / BHMA A156.9 B221181 - Architectural finishes available	Diameter: 1 3/4"	PLA2	US3, 5, 26, US26D, 15, US15A, 10B
	Coat and Hat Hook - Diecast material - Individually poly-bagged - Conforms to ANSI / BHMA A156.16 B221181	Projection: 2 7/8" Base dimension: 1" (W) x 1 1/2" (L)	CH28	US3, 26
	Bi-Fold Concave Knob - Beveled edge - Packed with 1" screw - Cast material	Diameter: 1 3/8"	CK130	US3, 5, 26D
  DIFP218 FP98	Drive In Finger Pull - Individually poly-bagged - Ideal for sliding doors - Conforms to ANSI / BHMA A156.16 B22201 and A156.14 D2781	Diameter: 2 1/8"	DIFP218 (Without Nail) FP98 (With Nail)	US3, 5, 10B, US15, 15A, US26, 26D

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

DOUBLE-ACTING FLOOR SPRING HINGE

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	Double-Acting Residential Floor Spring Hinge ▶ Double acting, spring tension ▶ Steel trim ▶ Heavy Duty ball bearing type with 90° Hold Open ▶ Can hold doors up to 90 lbs. ▶ Door Range 1 1/8" – 1 3/4"	Door Range 1 1/8" – 1 3/4" Door Prep: 8 1/8"(L) x 1 1/2"(H)	DAFH8	US3, 5, 15, US10B, US26D

CRASH CHAINS AND BOLTS

	Single Spring Crash Chain Door Guard ▶ Protects doors, hinges and glass from wind damage ▶ Made with heavy gauge zinc brackets and steel chain 13/16" diameter spring ▶ Individually poly-bagged with mounting screws	Chain: 21 3/4" Spring Dia: 13/16"	CCD30	Zinc
	Single Spring Crash Chain Door Guard (with VINYL) ▶ Protects doors, hinges and glass from wind damage ▶ Made with heavy gauge zinc brackets and steel chain 13/16" diameter spring ▶ Individually poly-bagged with mounting screws ▶ Weather and rip resistant vinyl cover	Chain: 21 3/4" Spring Dia: 13/16"	CDV24	Zinc
	Super Heavy Duty Adjustable Chain Door Stop with Vinyl Cover ▶ Heavy Duty compression spring on both ends of chain and end brackets ▶ Thick gauge steel brackets ▶ Welded solid steel chains ▶ Conforms to ANSI / BHMA A156.16 L12231 (Grade 1) ▶ Weather and rip resistant vinyl cover ▶ Comparable to IVES #115	Adjustable 20" to 30 1/2" Spring Dia: 13/16"	HDCDV-48	US26D
	24" Chain Bolt Hardened Steel ▶ Supplement to a regular door lock for added security on cabinet, double screen, garage and industrial doors ▶ Zinc plated ▶ Can be used on doors opening in by reversing the square bolt ▶ Equipped with a strong hard-drawn wire spring which throws the bolt automatically when chain is released ▶ Individually poly-bagged with strike and screws	Full 24" Chain	CB6	Zinc Chromium

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"

SURFACE OVERHEAD DOOR HOLDER AND STOPS

Cal-Royal CR550 Series holders and stops are designed to give dependable surface-mounted overhead door control for medium to light duty applications. They come in a wide assortment of architectural finishes. The CR550 series holders and stops can be installed in almost all types of doors and frames including doors with conventional butt hinges, offset pivots, continuous hinges, swing clear hinges and other specialty hinges. They can be mounted to accommodate 85° - 110° door opening. Each door holder and stop models come in four different sizes.

CR550 SERIES

- Limits door swing
- Non-Handed / Reversible
- Built-in cushioned stop
- Available stop only or stop / hold
- Automatic hold-open and release by push and pull on door
- Hold-open can be disengaged to act as stop only
- Heavy shock absorber spring provides compression before dead stop
- Screw packet included to allow for installation in wood or metal door and frame
- Maximum opening 110°, minimum door thickness 1 3/8"
- Available in architectural finishes
- ANSI A.156.8 UL Listed as STOP Function



ITEM NUMBER	SIZE	DOOR OPENING	FUNCTION	<i>Cal-Royal CR550 series holders and stops are designed for medium to light-duty applications. Generally used for openings that are subject to normal traffic activity, thus extending the life of doors, frames, hinges and walls or obstructions.</i> Material: <i>Channel is made of steel or stainless steel ¾" deep, ¾" wide and 0.050" thick; arm is made of steel or stainless steel ¾" wide, ⅜" thick; standard jamb bracket is made of steel or stainless steel ¾" wide, 2 ⅞" long, ⅜" thick.</i> Finish: <i>Available in architectural finishes.</i> <i>UL Listed for STOP only function.</i>
CR552S	2	23 ⅛" - 27"	STOP ONLY	
CR553S	3	27 ⅛" - 33"		
CR554S	4	33 ⅛" - 39"		
CR555S	5	39 ⅛" - 45"		
CR552H	2	23 ⅛" - 27"	HOLD OPEN	
CR553H	3	27 ⅛" - 33"		
CR554H	4	33 ⅛" - 39"		
CR555H	5	39 ⅛" - 45"		

OVERHEAD STOPS AND HOLDERS CROSS-REFERENCE CHART

CAL-ROYAL	GLYNN JOHNSON	ABH	ROCKWOOD	RIXSON	DORMA
STOP ONLY					
CR552S	452S	4421	14421	10-236	701S
CR553S	453S	4422	14422	10-336	702S
CR554S	454S	4423	14423	10-436	703S
CR555S	455S	4424	14424	10-536	
HOLDER					
CR552H	452H	4411	14411	10-226	701H
CR553H	453H	4412	14412	10-326	702H
CR554H	454H	4413	14413	10-426	703H
CR555H	455H	4414	14414	10-526	

HANDICAP RESTROOM SIGNS (ADA) WITH BRAILLE

- Includes Tactile Characters & Grade 2 Braille
- Meets Size and Placement Specifications
- Double Faced Tape for Easy Installation

- Individually Poly-bagged
- Packed 10pcs. per Inner Box, 100 pcs. per Master Carton

ITEM	SIZE	ITEM #	FINISH
Men, with Braille, pictogram, text	6" x 9"	M68	Blue or Black
Men Handicap, with Braille, pictogram, text	6" x 9"	MH68	
Boys Handicap, with Braille, pictogram, text	6" x 9"	BOYH68	
Women, with Braille, pictogram, text	6" x 9"	W68	
Women Handicap, with Braille, pictogram, text	6" x 9"	WH68	
Girls Handicap, with Braille, pictogram, text	6" x 9"	GIRH68	
Unisex Restroom, with Braille, pictogram, text	6" x 9"	RS68	
Unisex Handicap Restroom, with Braille, pictogram, text	6" x 9"	RSH68	
No Smoking, with Braille, pictogram, text	6" x 9"	NS68	
Exit, with Braille, pictogram, text	6" x 9"	CAEXT69	
Exit Route, with Braille, text	6" x 6"	CAEXRT4534	
Men, with Braille, text	1 3/4" x 6"	M1346	
Women, with Braille, text	1 3/4" x 6"	W1346	
Restroom, with Braille, text	1 3/4" x 6"	RS1346	

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"



GIRH68



M68



W68



RS68



NS68



BOYH68



MH68



WH68



RSH68



CAEXT69



M1346



W1346



RS1346



CAEXRT4534

HANDICAP RESTROOM SIGNS (ADA) WITH BRAILLE

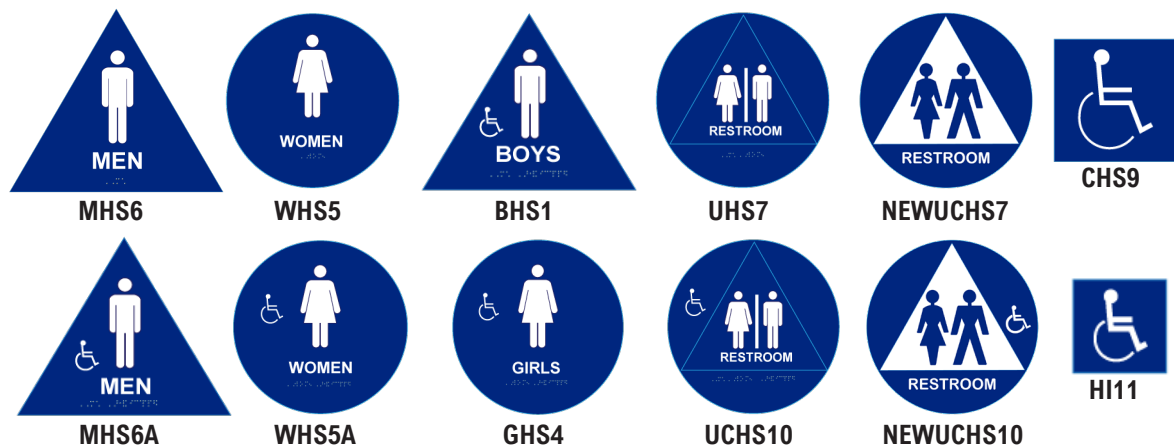
- Complies to Exterior and Interior Handicap Accessible Restrooms and International Symbol of Signs
- Packed 10 pcs. per Inner Box, 100 pcs. per Master Carton (may vary depending on customers request)
- Raised Letters and Symbols
- Brailled for the Blind
- Double Faced Tape for Easy Installation
- Individually Poly-bagged

ITEM	SIZE	ITEM #	FINISH
Women Sign, Raised and Braille	12" Circle	WHS5	Blue Only
Girls Sign, Raised and Braille	12" Circle	GHS4	
Men Sign, Raised and Braille	10 ½" High Triangle	MHS6	
Boys Sign, Raised and Braille	10 ½" High Triangle	BHS1	
Women Sign, Raised and Braille, and Handicap Logo	12" Circle	WHS5A	Blue or Black
Men Sign, Raised and Braille, and Handicap Logo	10 ½" High Triangle	MHS6A	
Unisex, Raised and Braille	12" Circle	UHS7	
Unisex, Raised and Braille, and Handicap Logo	12" Circle	UCHS10	
Unisex, Raised and Braille	12" Circle	NEWUCHS7	
Unisex, Raised and Braille, and Handicap Logo	12" Circle	NEWUCHS10	

DECALS AND STICKERS

Blue Square Plastic Sign and Handicap Logo	8" x 8"	CHS9	Blue
Blue Insignia Handicap Logo	4" x 4"	HI11	White on Blue
This door to remain unlocked during business hours	1 ½" x 24"	WDC13	White on Black
This door to remain unlocked during business hours	1 ½" x 24"	BDC12	Black on Clear
These doors to remain unlocked during business hours	1 ½" x 24"	TDUW8	White on Black
These doors to remain unlocked during business hours	1 ½" x 24"	TDUB1	Black on Clear
This door to remain unlocked when building is occupied	1 ½" x 27 ½"	BDO-5	Black on Clear
This door to remain unlocked when building is occupied	1 ½" x 27 ½"	WDO-11	White on Black
These doors to remain unlocked when building is occupied	1 ½" x 27 ½"	TWOC-14	White on Black
These doors to remain unlocked when building is occupied	1 ½" x 27 ½"	TBOC-19	Black on Clear

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"



THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS

WDC13

THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS

BDC12

THESE DOORS TO REMAIN UNLOCKED DURING BUSINESS HOURS

TDUW8

THESE DOORS TO REMAIN UNLOCKED DURING BUSINESS HOURS

TDUB1

THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED

WDO-11

THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED

BDO-5

THESE DOORS TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED

TWOC-14

THESE DOORS TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED

TBOC-19

CALIFORNIA-APPROVED RESTROOM SIGNS WITH BRAILLE

- Includes Tactile Characters & Contracted Grade 2 Braille
- Meets Size and Placement Specifications
- Double Faced Tape for Easy Installation

- Individually Poly-bagged
- Packed 10pcs. per Inner Box, 100 pcs. per Master Carton

ITEM	SIZE	ITEM #	FINISH
Men Handicap, with Braille, pictogram, text	6" x 9"	CAMH69	Blue
Women Handicap, with Braille, pictogram, text	6" x 9"	CAWH69	
Unisex Restroom Handicap, with Braille, pictogram, text	6" x 9"	CARSH69	
Handicap Accessible, with Braille, pictogram, text	6" x 9"	CACCS69	
Exit, with Braille, text	6" x 9"	CAEXT69	Blue or Black
Men, with Braille, text	1 3/4" x 8"	CAM1348	Blue
Women, with Braille, text	1 3/4" x 8"	CAW1348	
Restroom, with Braille, text	1 3/4" x 8"	CARS1348	

Specification Sheets available for submittal purposes at www.cal-royal.com. Click on "Specification Sheets Image"



CAMH69



CAWH69



CARSH69



CAEXT69



CACCS69



CAM1348



CAW1348



CARS1348

SLIDING DOOR HARDWARE

- Adds modern look to ordinary doors and doorways
- Ultra-quiet rollers and ball bearing wheels
- Excellent solution to create beautiful living spaces
- 304 Grade Stainless Steel

- Easy to assemble
- Includes standard bumpers on both sides
- **Optional Soft Action Stop or Soft Close System**
- Door & door handle not included

SPECIFICATIONS		
Max Weight for Wood and Glass Doors	200 lbs (90kg)	
Wood Door Thickness	1 3/8" - 1 9/16" (35 - 40 mm)	1 9/16" - 1 3/4" (40 - 45 mm)
Glass Door Thickness	5/16" - 3/8" (8 - 10 mm)	3/8" - 1/2" (10 - 12 mm)
Finish	Satin Stainless Steel (US32D)	
Sliding Rod Length	6' 6"	8' 2"
Max Door Opening	36"	48"

ACCESSORIES



(SEE BELOW FOR ROLLER TYPE APPLICATION)

SCSDH (Soft Close System)

Pair of Soft Close System at both ends. Comes as a complete set with door track and components. Easy installation on prefabricated roller track without the need to mortise on door. Can also be purchased as accessory only.



TYPE	MIN DOOR WT	MAX DOOR WT
SCS40	44 LBS (20 KG)	88 LBS (40 KG)
SCS80 *STANDARD	88 LBS (40 KG)	176 LBS (80 KG)

Select correct type of closer for maximum smooth closing operation. Refer to table for door weight limits.

SDH SERIES - STAINLESS STEEL SLIDING DOOR HARDWARE

FOR WOOD DOORS



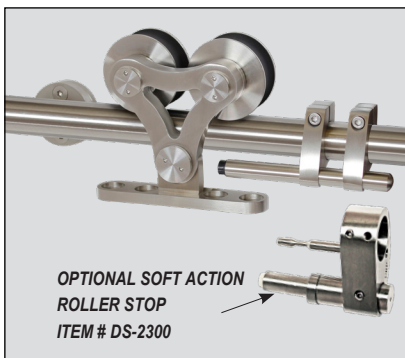
SDH10 (Track w/ Regular Stop)
SDH13 (Track w/ Soft Stop)
SCS8016 (Track w/ Soft Close System with SCS80)
SCS4016 (Track w/ Soft Close System with SCS40)

Finish: US32D
Mounting Style: Top
Design: Single Wheel



SDH11 (Track w/ Regular Stop)
SDH14 (Track w/ Soft Stop)
SCS8017 (Track w/ Soft Close System with SCS80)
SCS4017 (Track w/ Soft Close System with SCS40)

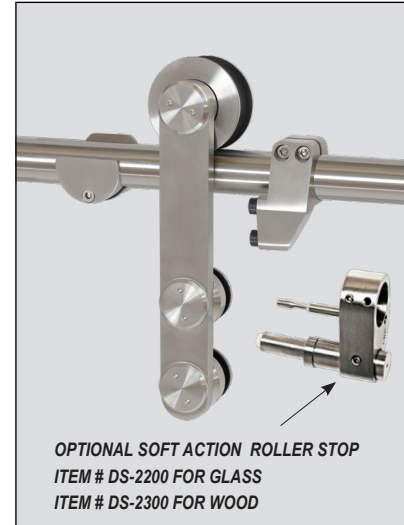
Finish: US32D
Mounting Style: Top
Design: Spoke Wheel



SDH12 (Track w/ Regular Stop)
SDH15 (Track w/ Soft Stop)
SCS8018 (Track w/ Soft Close System with SCS80)
SCS4018 (Track w/ Soft Close System with SCS40)

Finish: US32D
Mounting Style: Top
Design: Dual Wheel

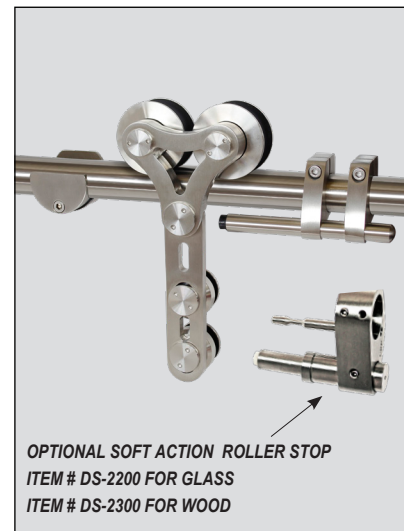
FOR WOOD AND GLASS DOORS



FOR GLASS DOORS
SDH20 (Track w/ Regular Stop)
SDH23 (Track w/ Soft Stop)
SCS8025 (Track w/ Soft Close System with SCS80)
SCS4025 (Track w/ Soft Close System with SCS40)

FOR WOOD DOORS
SDH30 (Track w/ Regular Stop)
SDH33 (Track w/ Soft Stop)
SCS8035 (Track w/ Soft Close System with SCS80)
SCS4035 (Track w/ Soft Close System with SCS40)

Finish: US32D
Mounting Style: Surface
Design: Strap Single Wheel



FOR GLASS DOORS
SDH21 (Track w/ Regular Stop)
SDH24 (Track w/ Soft Stop)
SCS8026 (Track w/ Soft Close System with SCS80)
SCS4026 (Track w/ Soft Close System with SCS40)

FOR WOOD DOORS
SDH31 (Track w/ Regular Stop)
SDH34 (Track w/ Soft Stop)
SCS8036 (Track w/ Soft Close System)
SCS4036 (Track w/ Soft Close System with SCS40)

Finish: US32D
Mounting Style: Surface
Design: Strap Dual Wheel

SLIDING DOOR HARDWARE

- Blends seamlessly with modern, rustic, classic, or contemporary interior designs.
- **With optional Soft Close System**
- Provides a unique and clean look to any interior doorway or room divider
- Contains ultra-quiet rollers for smoother operation
- Includes standard bumpers on both sides
- Has a durable Powder Coated Matte Black finish
- Includes all mounting accessories for easy assembly
- **DOOR NOT INCLUDED.**

SPECIFICATIONS

Max Weight for Wood Door	265 lbs (120kg)	
Wood Door Thickness	1 3/8" - 1 9/16" (35 - 40 mm)	1 3/4" - 2" (45 - 50 mm)
Glass Door Thickness	5/16" - 3/8" (8 - 10 mm)	3/8" - 1/2" (10 - 12 mm)
Finish	Powder Coated Matte Black	
Sliding Rod Length	6' 6"	8' 0"
Max Door Opening	39"	47"
Included In Set	1 Sliding Rod, 2 Rollers, 2 Stoppers, 1 Floor Guide, and Complete Mounting Screws. Optional Soft Closer System.	

ACCESSORIES

BDHCP (Track Connector)

Securely connects 2 door tracks with easy installation.



SCSBDH (Soft Close System)

Pair of Soft Close System at both ends. Comes as a complete set with door track and components. Easy installation on roller track without the need to mortise on door.



BDH SERIES - BLACK BARN DOOR HARDWARE



Item: BDH3166 (6 ft.)

BDH3180 (8 ft.)


Tracks with Soft Close System:

SCSBDH3166 (6 ft.)

SCSBDH3180 (8 ft.)

Mounting Style: Top

Design: Single Wheel



Item: BDH3366 (6 ft.)

BDH3380 (8 ft.)


Tracks with Soft Close System:

SCSBDH3366 (6 ft.)

SCSBDH3380 (8 ft.)

Mounting Style: Surface

Design: Diamond



Item: BDH3066 (6 ft.)

BDH3080 (8 ft.)

Tracks with Soft Close System:

SCSBDH3066 (6 ft.)

SCSBDH3080 (8 ft.)

Mounting Style: Surface

Design: Strap Wheel



Item: BDH3466 (6 ft.)

BDH3480 (8 ft.)


Tracks with Soft Close System:

SCSBDH3466 (6 ft.)

SCSBDH3480 (8 ft.)

Mounting Style: Surface

Design: Horseshoe



Item: BDH3266 (6 ft.)

BDH3280 (8 ft.)


Tracks with Soft Close System:

SCSBDH3266 (6 ft.)

SCSBDH3280 (8 ft.)

Mounting Style: Surface

Design: Arrowhead



Item: BDPUL6000

Flat Type Door Handle