


## A2200 & AF2200 Rim Type Panic and Fire Exit Devices (ADA) A2260V & AF2260V Vertical Rod Panic and Fire Exit Devices (ADA) ANSI A156.3, Grade 1

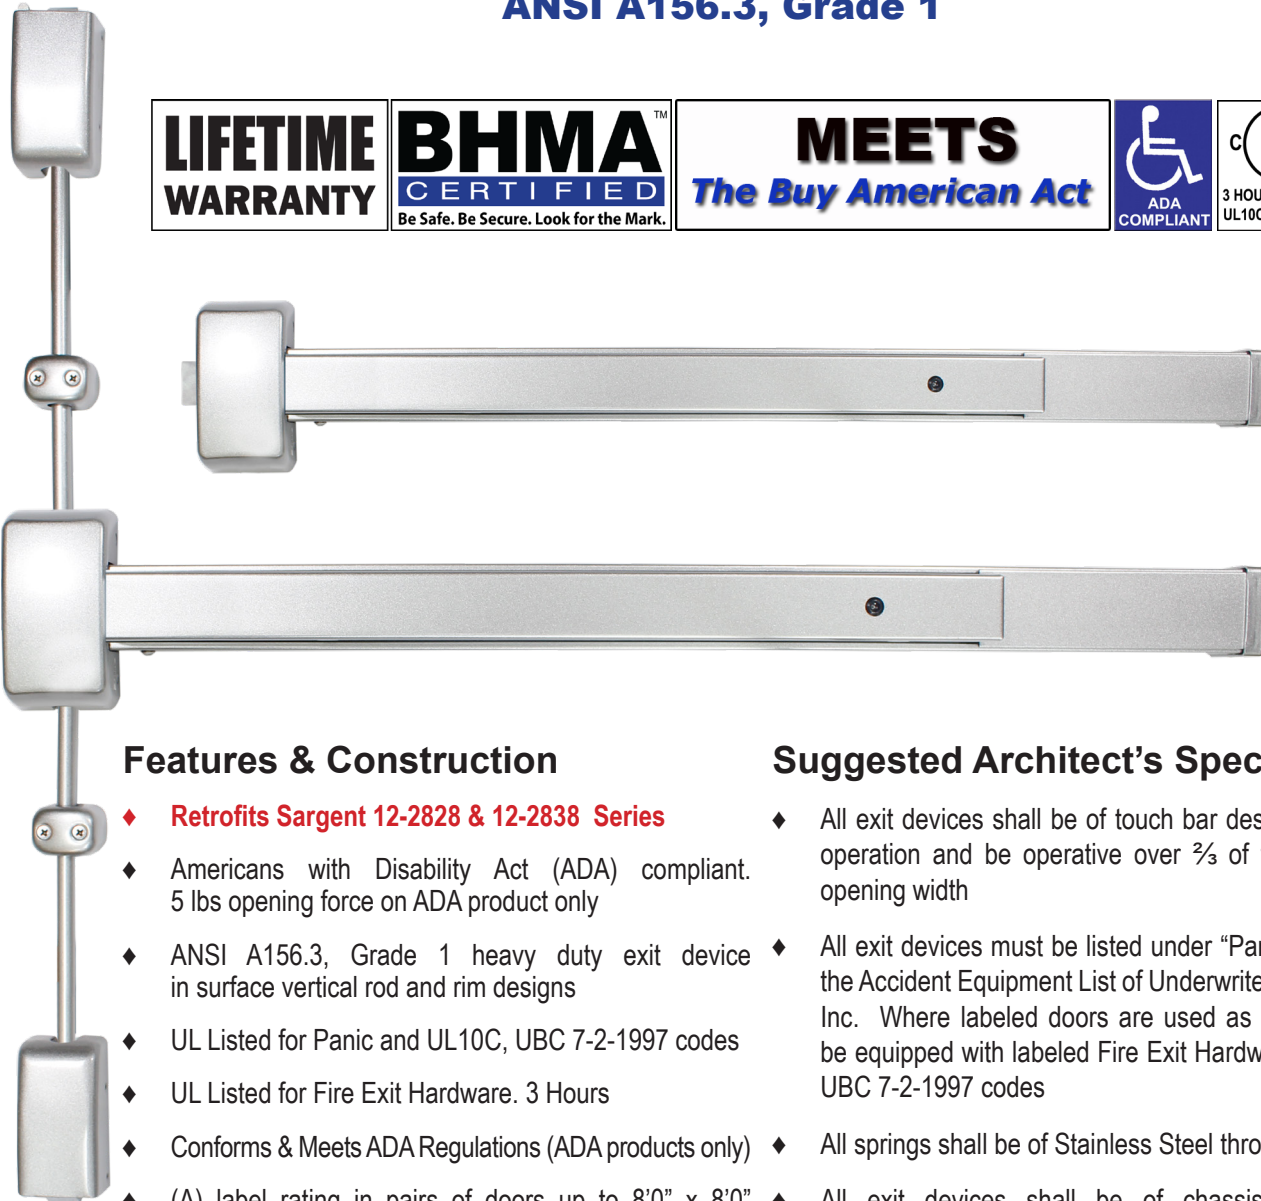

### Features & Construction

- ◆ **Retrofits Sargent 12-2828 & 12-2838 Series**
- ◆ Americans with Disability Act (ADA) compliant. 5 lbs opening force on ADA product only
- ◆ ANSI A156.3, Grade 1 heavy duty exit device in surface vertical rod and rim designs
- ◆ UL Listed for Panic and UL10C, UBC 7-2-1997 codes
- ◆ UL Listed for Fire Exit Hardware. 3 Hours
- ◆ Conforms & Meets ADA Regulations (ADA products only)
- ◆ (A) label rating in pairs of doors up to 8'0" x 8'0" swinging in same or opposite directions
- ◆ Uncompromising security and safety in single and double fire exit doors
- ◆ Chassis mounted unit construction
- ◆ Available in many different functions. Lever and escutcheon trims are grade 1 construction with clutch on rose trims. Escutcheon trims are rigid and covers 161 cut out.

### Suggested Architect's Specifications

- ◆ All exit devices shall be of touch bar design with smooth operation and be operative over  $\frac{2}{3}$  of the door's clear opening width
- ◆ All exit devices must be listed under "Panic Hardware" in the Accident Equipment List of Underwriters' Laboratories, Inc. Where labeled doors are used as exits, they must be equipped with labeled Fire Exit Hardware and UL10C, UBC 7-2-1997 codes
- ◆ All springs shall be of Stainless Steel throughout
- ◆ All exit devices shall be of chassis mounted unit construction.
- ◆ All exit devices shall be ANSI A156.3, Grade 1

# A2260V & AF2260V ADA Series

## GRADE 1 Vertical Rod Type Exit Device



**LIFETIME  
WARRANTY**

**BHMA™  
CERTIFIED**  
Be Safe. Be Secure. Look for the Mark.

**MEETS**  
*The Buy American Act*




### Specifications

<b>For Doors.....</b>	1 3/4" thick standard optional 2 1/4" thick. 3 3/4" minimum stile width required for single door application. 3 1/2" minimum stile width required for double door application. Lever trims available. 2 3/4" backset
<b>Top &amp; Bottom Chassis.....</b>	Non-ferrous Alloy (Panic Grade), Steel (Fire Grade)
<b>Cover.....</b>	Non-ferrous plated material. Covers stock hollow metal doors with 161 cut out
<b>Mounting.....</b>	Furnished standard with wood and machine screws. Thru-bolts are standard packaging on fire rated devices
<b>End Cap.....</b>	Steel construction
<b>Alarm.....</b>	Available. Prefix "NALRM" before MODEL #
<b>Hand.....</b>	Handed. Easily field reversible. Specify at time of order LHR, RHR for convenience
<b>Latch Bolt &amp; Spring.....</b>	Stainless steel
<b>ANSI Standard.....</b>	A156.3, Grade 1
<b>Rail Assembly.....</b>	Heavy gauge steel, painted
<b>Strike.....</b>	See strike page
<b>Dogging Feature.....</b>	Allen-type key furnished standard on non-fire labeled devices

**\*Americans with Disability Act (ADA) compliant  
5 lbs opening force on ADA Series only**

**\*Refer to the Price List for Stock Sizes and Finishes**

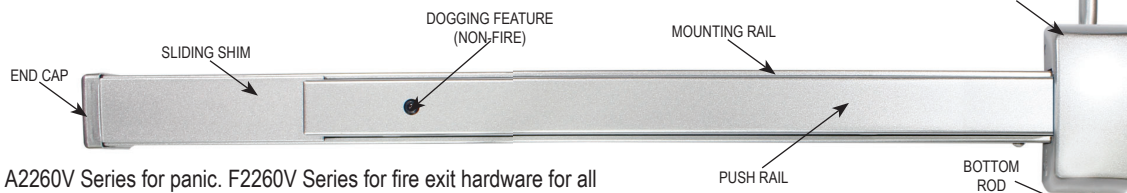

**UL and ULC Listed.....** A2260V Series for panic. F2260V Series for fire exit hardware for all types of 8' x 8' double doors for up to 3 hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes.

**Finish.....** Available in Alum, Duro, Gold, L1 (Black)

**Electronic Functions.....** (ELR) Electrical Latch Retraction and RX & LX Signal Switch available

### DIMENSIONS

Touchbar height to finished floor	41" (1041 mm) at center
Touchbar projection	
Neutral	2 1/2" (64 mm)
Depressed	1 3/4" (45 mm)
Panic grade top & bottom latch case	3 15/16" x 2 1/8" x 1 3/8" (100 mm x 54 mm x 35 mm)
Fire grade top latch case	3 15/16" x 2 11/16" x 2 1/16" (100 mm x 68 mm x 52 mm)
Fire grade bottom latch case	3 15/16" x 2 1/8" x 1 3/8" (100 mm x 54 mm x 42 mm)
Top and bottom rod length for 36" x 84" doors	Top rod 39 3/16" (995 mm), bottom rod 37 3/16" (945 mm)
Top and bottom rod length for 48" x 96" doors	Top rod 51 3/16" (1300 mm), bottom rod 37 3/16" (945 mm)
Vertical Rods	1/2" (13 mm) Round tubing

MODEL	ACTUAL LENGTH	MAX CUT DOWN	DOOR SIZE
A2210V2484, AF2210V2484	20"	2"	22" to 24" door width
A2270V3284, AF2270V3284	28"	6"	26" to 32" door width
A2260V3684, AF2260V3684, A2290V3696, AF2290V3696, A2250V36120	32"	6"	30" to 36" door width
A2280V4896, AF2280V4896, A2240V48120	44"	12"	36" to 48" door width

### Minimum Stile Requirements

Double Door with Two Vertical Rod Type Exit Devices

