

## ACTUATORS & ACCESSORIES

PUSH PLATES 4.5" SQUARE  
HARD WIRED or WIRELESS



8636-SW

- 4.5 inch square stainless steel push plate
- Blue handicap logo only
- Available in Pair, Hard Wired, Item No 8650-KIT
- Available in Pair with Wireless Radio Kit, Item No 8651-KIT
- (1) 8636-SW, Stainless steel push plate
- (1) 8636-SM, 4.5" square surface mount box


PUSH PLATES 6" ROUND  
HARD WIRED or WIRELESS



8637-SW

- 6 inch round stainless steel push plate
- Blue handicap logo
- Available in Pair, Hard Wired, Item No 8650-KIT
- Available in Pair with Wireless Radio Kit, Item No 8651-KIT
- (1) 8637-SW, 6" Stainless steel push plate
- (1) 8637-SM, 6" round surface mount box

WIRELESS RADIO KIT

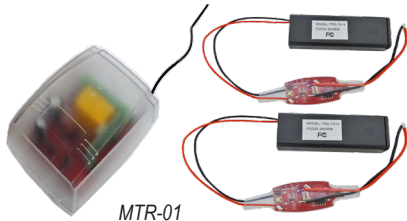

MTR-01

- RADIO KIT eliminates the hassle of wiring from actuator to controller.
- Federal Communications Commission (FCC) Approved
- For use with 8636-SW and 8637-SW for conversion or replacement
- (1) Receiver, 433 Mhz
- (2) Transmitters, 433 Mhz

VERTICAL ACTUATOR BAR  
HARD WIRED OR WIRELESS



ACT-36

- Exceeds California Building Code Section 1117B.6
- Weather Resistant, stainless steel construction
- Membrane switches provide quiet & reliable activation
- Entire surface provides activation from any angle
- Can be mounted on a wall or to a bollard
- 6" W x 36" H x 1" Thick
- ACT-36, 36" Hardwired, txt & logo
- ACT-900, 36" Wireless, 900 MHz



INFRARED SAFETY SENSOR, HARD WIRED



SCAN-8660

- Low profile design reduces accidental damage
- Can be mounted horizontal or vertical
- Detects the presence of a pedestrian, while the door is opening or closing using triangulation
- Length: 34.5 inches
- Power: 12/24 VAC / VDC
- SCAN-8660, Door Mounted, active infrared safety sensor

## ACTUATORS & ACCESSORIES

|  |  |  |
|--|--|--|
| <p>TOUCHLESS SWITCH, HARD WIRED</p>  <p>CTB-01</p> <ul style="list-style-type: none"> <li>• Touchless, wave to open switch</li> <li>• Active Infrared Sensing Technology, 1"- 5" range</li> <li>• 2" x 4", Stainless Steel</li> <li>• Fits in a single gang electrical box</li> <li>• Power: 12/24V DC</li> <li>• <b>CTB-01, 2.75" x 4.5", 1-gang, Text, Logo &amp; Hand</b></li> </ul>   | <p>TOUCHLESS SWITCH, HARD WIRED</p>   <p>CTB-02</p> <ul style="list-style-type: none"> <li>• Touchless, wave to open switch</li> <li>• Active Infrared Sensing Technology, 1"- 5" range</li> <li>• 4.5" x 4.5", Stainless Steel plate with surface mount plastic box</li> <li>• Power: 12/24V DC</li> <li>• <b>CTB-02, 4.5" x 4.5" Square, Text, Logo &amp; Hand</b></li> </ul>   | <p>TOUCHLESS SWITCH, HARD WIRED</p>   <p>CTB-03</p> <ul style="list-style-type: none"> <li>• Touchless, wave to open switch</li> <li>• Active Infrared Sensing Technology, 1"- 6" range</li> <li>• 4.5" x 4.5", Stainless Steel &amp; Glass plate with surface mount plastic box</li> <li>• Power: 12/24V AC/DC</li> <li>• <b>CTB-03, 4.5" x 4.5" Square, Text &amp; Hand</b></li> </ul>   |
| <p>TOUCHLESS SWITCH, HARD WIRED</p>  <p>CTB-05</p> <ul style="list-style-type: none"> <li>• Infrared Photoelectric Reflective Sensor Switch</li> <li>• 2"- 8" range, With Red/Green LED indicator</li> <li>• Adjustable timer delay function, 0.5 to 20 sec.</li> <li>• 1.5" x 4.5", Stainless Steel</li> <li>• Fits in a standard jamb size electrical gang box</li> <li>• Power: 12/24V DC</li> <li>• <b>CTB-05, 1.5" x 4.5", single gang, Text &amp; Hand</b></li> </ul>  | <p>TOUCHLESS SWITCH, HARD WIRED</p>   <p>CTB-07</p> <ul style="list-style-type: none"> <li>• Infrared Photoelectric Reflective Sensor Switch</li> <li>• 2"- 8" range, With Red/Green LED indicator</li> <li>• Adjustable timer delay function, 0.5 to 20 sec.</li> <li>• 4.5" x 4.5", Stainless Steel plate with surface mount plastic box</li> <li>• Power: 12/24V DC</li> <li>• <b>CTB-07, 4.5" x 4.5" Square, Text, Logo &amp; Hand</b></li> </ul>  | <p>TOUCHLESS SWITCH, WIRELESS</p>   <p>CTW-02</p> <ul style="list-style-type: none"> <li>• Touchless, wave to open switch</li> <li>• Active Infrared Sensing Technology, 1"-3" range</li> <li>• 4.5" x 4.5", Composite Surface</li> <li>• With built in radio transmitter</li> <li>• Sold per pair (2 Switches &amp; 1 Receiver)</li> <li>• Power: 12/24V DC</li> <li>• <b>CTW-02, 4.5" x 4.5" Square, Logo</b></li> </ul>   |
| <p>TOUCHLESS SWITCH, HARD WIRED</p>  <p>8630SW 8631SW 8632SW</p> <ul style="list-style-type: none"> <li>• Utilizes microwave motion technology</li> <li>• 2" to 24" detection range</li> <li>• Audible and visual alert indications of activation</li> <li>• Power: 12/24V AC/DC</li> <li>• <b>8630SW, 4.5" x 4.5", double gang, Text &amp; Hand</b></li> <li>• <b>8631SW, 4.5" x 2.75", single gang, Text &amp; Hand</b></li> <li>• <b>8632SW, 4.5" x 1.68", Text &amp; Hand</b></li> <li>• <b>8640-SM, double gang, surface mount box</b></li> <li>• <b>8641-SM, single gang, surface mount box</b></li> <li>• <b>8642-SM, 1.5" x 4.75" jamb surface mount box, Hardwired solutions only</b></li> </ul> | <p>TOUCHLESS SWITCH, HARD WIRED</p>  <p>8633-SW</p> <ul style="list-style-type: none"> <li>• Utilizes microwave motion technology</li> <li>• Adjustable from 4" to 24" range</li> <li>• Microwave cell can be mounted behind drywall</li> <li>• Comes with both single gang and double gang faceplates</li> <li>• Power: 12/24V AC/DC</li> <li>• <b>8633-SW, Microwave Cell Switch, with Single and Double gang BLACK faceplate, Text &amp; Hand</b></li> <li>• <b>8641-SM, Single gang, surface mount box</b></li> <li>• <b>8640-SM, Double gang, surface mount box</b></li> </ul> | <p>TOUCHLESS SWITCH, SHORT RANGE HARD WIRED</p>   <p>8634-SW 8635-SW</p> <ul style="list-style-type: none"> <li>• Utilizes capacitance technology</li> <li>• Short range detection zone reduces unwanted activations</li> <li>• Touchless design reduces the spread of bacteria, disease and contamination</li> <li>• Power: 12/24V AC/DC</li> <li>• <b>8634-SW, 6" Round, Text, Logo &amp; Hand</b></li> <li>• <b>8635-SW, 4.75" Square, Text, Logo &amp; Hand</b></li> </ul> |

Cal-Royal Products, Inc. reserves the right to, and may, on occasions, make changes and/or improvements in design, dimensions and technical specifications without prior notice.