

# MEDIUM DUTY CONCEALED OVERHEAD DOOR HOLDER AND STOPS

## CON770 SERIES

### Application


- Interior or exterior doors
- Single or double acting
- Non-handed
- Recommended for moderate traffic, medium weight doors

### Features

- **Medium duty concealed**, Slide track design
- Degree of opening is fully adjustable and can be adapted to changing needs
- Heavy shock absorber spring provides 5-7° compression before deadstop
- Stop or hold-open function
- Complete screw packet with thru-bolts for door, wood and machine screws for frame
- Durable slider cam
- 110° maximum opening
- 1-3/4" minimum door thickness

### Compliance

- ANSI A156.8 UL Listed as STOP Function

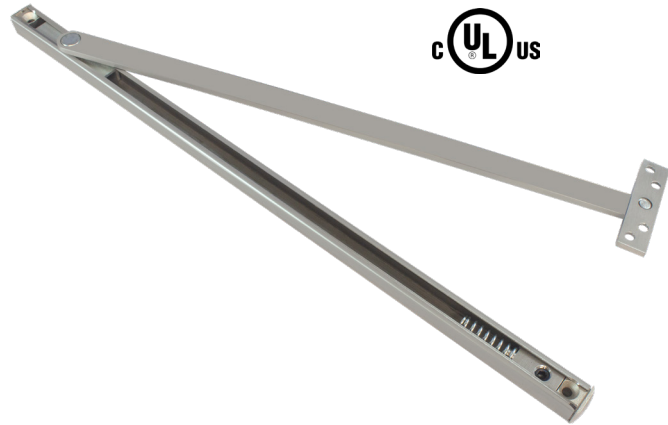

DOOR OPENING CHART				
MODEL #	SIZE	FUNCTION	BUTT OFFSET PIVOTS	CENTER HUNG PIVOTS
CON772S	2	STOP ONLY	*18" - 24"	---
CON773S	3		24 1/16" - 30"	27" - 32"
CON774S	4		30 1/16" - 36"	32 1/16" - 38 1/2"
CON775S	5		36 1/16" - 42"	38 9/16" - 45"
CON776S	6		42 1/16" - 48"	45 1/16" - 48"
CON772H	2	HOLD-OPEN	*18" - 24"	---
CON773H	3		24 1/16" - 30"	27" - 32"
CON774H	4		30 1/16" - 36"	32 1/16" - 38 1/2"
CON775H	5		36 1/16" - 42"	38 9/16" - 45"
CON776H	6		42 1/16" - 48"	45 1/16" - 48"

\*Butt hung only on this size door. No swing clear hinges  
Refer to the price list for stock sizes and finish.

### MEDIUM DUTY CONCEALED OVERHEAD STOPS AND HOLDERS CROSS-REFERENCE CHART

CAL-ROYAL	GLYNN JOHNSON	ABH	ROCKWOOD	RIXSON	DORMA
<b>STOP ONLY</b>					
CON772S	412S	4021	OH201M	2-136	712S
CON773S	413S	4022	OH202M	2-236	713S
CON774S	414S	4023	OH203M	2-336	714S
CON775S	415S	4024	OH204M	2-436	715S
CON776S	416S		OH205M	2-536	716S
<b>HOLDER</b>					
CON772H	412H	4011	OH201M	2-126	712H
CON773H	413H	4012	OH202M	2-226	713H
CON774H	414H	4013	OH203M	2-326	714H
CON775H	415H	4014	OH204M	2-426	715H
CON776H	416H		OH205M	2-526	716H