


HEAVY DUTY CONCEALED OVERHEAD DOOR HOLDER AND STOPS

CON880 SERIES



Application

- Interior or exterior doors
- Single or double acting
- Non-handed
- Recommended for high traffic, heavy abuse installations

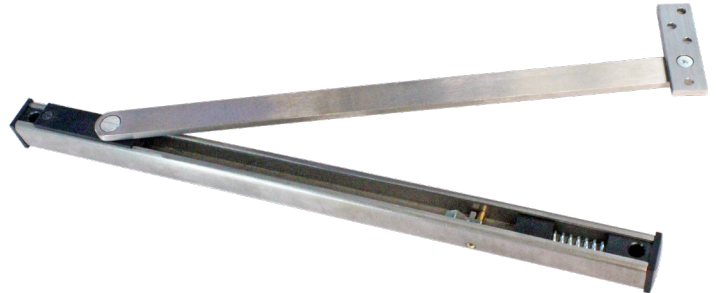

Features

- Heavy duty concealed
- Slide track design
- Stop or hold open function
- 1 3/4" minimum door thickness
- 110° maximum opening
- Durable slider cam
- Surface on / off knob on hold open models
- Heavy shock absorber spring provides 5-7° compression before dead stop
- 1 3/16" square channel
- Complete screw packet for installation in wood and machine screws for door and frame
- Hanging means other than standard butts or offset pivots require special templating and pricing. Consult factory

Compliance

- ANSI A156.8 UL Listed as STOP Function

DOOR OPENING CHART

MODEL #	SIZE	FUNCTION	BUTT OFFSET PIVOTS	CENTER HUNG PIVOTS
CON882S	2	STOP ONLY	*24" - 28"	---
CON883S	3		28 1/16" - 33"	30" - 36"
CON884S	4		33 1/16" - 38"	36 1/16" - 41"
CON885S	5		38 1/16" - 43"	41 1/16" - 46"
CON886S	6		43 1/16" - 48"	46 1/16" - 50"
CON882H	2	HOLD-OPEN	*24" - 28"	---
CON883H	3		28 1/16" - 33"	30" - 36"
CON884H	4		33 1/16" - 38"	36 1/16" - 41"
CON885H	5		38 1/16" - 43"	41 1/16" - 46"
CON886H	6		43 1/16" - 48"	46 1/16" - 50"

*Butt hung only on this size door. No swing clear hinges
Refer to the price list for stock sizes and finish.

CONCEALED OVERHEAD STOPS AND HOLDERS CROSS-REFERENCE CHART

CAL-ROYAL	GLYNN JOHNSON	ABH	ROCKWOOD	RIXSON	DORMA
STOP ONLY					
CON882S	102S	1027	OH101S	1-136	912S
CON883S	103S	1022	OH102S	1-236	913S
CON884S	104S	1023	OH103S	1-336	914S
CON885S	105S	1024	OH104S	1-436	915S
CON886S	106S	1025	OH105S	1-536	916S
HOLDER					
CON882H	102H	1017	OH101H	1-126	912H
CON883H	103H	1012	OH102H	1-226	913H
CON884H	104H	1013	OH103H	1-326	914H
CON885H	105H	1014	OH104H	1-426	915H
CON886H	106H	1015	OH105H	1-526	916H