

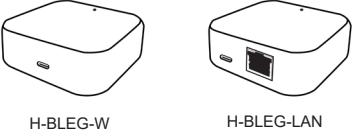











►ADDITIONAL ACCESSORIES FOR CR929M, CR9298D, EXCR929M, EXCR9298D, AND MRCR98D SERIES

ILLUSTRATION	ITEM #	DESCRIPTION	FINISH
	CRPRFID	Extra RFID card Operates at 13.56MHz in accordance with ISO 14443A. Inductive distance up to 1 3/16"	---
	H-CCRFID	Construction Card RFID Operates at 13.56MHz in accordance with ISO 14443A. Inductive distance up to 1 3/16"	---
	H-RFID-KF	Extra RFID KEY-FOB Dual Frequency enamel fobs. (125KHz + 13.56 MHz) 1-9/16" x 1"	---
	RFID-DFE	Extra RFID KEY-FOB Dual Frequency enamel fobs. (125KHz + 13.56 MHz) 2" x 1-3/16"	---
	RFID-KF	Extra RFID KEY-FOB Operates at 13.56MHz in accordance with ISO 14443A. Inductive distance up to 1 3/16"	---
	H-BLEG-W	Connectivity: WiFi 2.4G Power Port: Type-C USB Voltage: 5V/500mA	---
	H-BLEG-LAN	Connectivity: Ethernet Communication range: 10M (no obstruction) Power Port: Type-C USB	---
	H-ENCODER	CARD ENCODER Operates at 13.56MHz Power Input: 5V / 500mA Power Port: Type-C USB	---
	H-DPS	Door Position Switch For CR929M & EXCR929M ONLY Recessed Magnetic Switch	---
	H-USBC	Type C to Type C Length: 9 -13/16"	---
	H-929-RC	Retrofit Cover - Round Design For CR929M & EXCR929M ONLY Set of 2 Pcs	US32D BLACK
	H-9298D-RC	Retrofit Cover - Square Design For CR9298D, EXCR9298D, & MRCR98D ONLY Set of 2 Pcs	US32D BLACK

► ADDITIONAL ACCESSORIES FOR CR929M, CR9298D, EXCR929M, EXCR9298D, AND MRCR98D SERIES

ILLUSTRATION	ITEM #	DESCRIPTION	FINISH
	H-ACK2	SMART ACCESS CONTROL Card Capacity: 20,000 (MF 13.56MHz) Dimensions: 79MM X 125MM X 15.5MM Supporting System: Android 4.3 / IOS7.0 above Power Supply: DC12V Material: Aluminum frame / Tempered Glass Panel	---
	H-ACK2F	FINGERPRINT SMART ACCESS CONTROL Card Capacity: 20,000 (MF 13.56MHz) Fingerprint: 100 (expandable up to 500 upon request, at an additional cost) Dimensions: 79MM X 125MM X 15.5MM Supporting System: Android 4.3 / IOS7.0 above Power Supply: DC12V Material: Aluminum frame / Tempered Glass Panel FACTORY ORDER ONLY	---
	CRPSC-R	DC POWER OUTPUT FOR H-ACK2 / H-ACK2F Input Voltage: AC110V-240V 50/60Hz Output Voltage: DC12V-14.5V DC Current: 5A Dimensions: 101MM L X 90MM W X 35MM H Power Supply: DC12V Material: Aluminum frame / Tempered Glass Panel	---
	007-BPH US32D	EXTRA BATTERY PACK HOLDER Dimensions: 70MM L X 65MM W X 20MM H Battery Capacity: 4X AA Batteries For EXCR929M, EXCR9298D, & MRCR98D ONLY (BATTERIES NOT INCLUDED)	---
	H-ALK-A2	Extra ALKALINE AA BATTERIES	---
	H-ALK-A3	Extra ALKALINE AAA BATTERIES	---
KEYING			
	H-KEYBLANK	KEYBLANK For CR929M & CR9298D ONLY	
	H-ECK	Extra CUT KEYS For CR929M & CR9298D ONLY	