


CRPT-2, CRPT-10, CRPT-10C

CONCEALED POWER TRANSFER UNITS

Features:


- CRPT-2, CRPT-10 and CRPT-10C are designed to discreetly transfer electrical power from the frame to the door in a very secure manner
- UL 10C-Listed for up to 3 hours for Fire Rated doors and frames
Standard 7-2, "Fire Test of Door Assemblies" (1997)
- UL-Listed as Miscellaneous Fire Door Accessories
- Classified according to Uniform Building Code (UBC)
- Unit is mortised into the edges of the door and frame during installation and is completely concealed when door is in the close position
- Designed for use in high traffic and heavy volume situations
- Packaged individually with fasteners for wood, steel or aluminum doors and frames
- All parts are made of metal including back boxes - no plastic parts
- Crimp connectors are supplied for a more secure and clean connection
- Housing Dimensions: 9" H x 1 1/4" W x 1 5/8" D (229mm x 32mm x 41mm)
- Minimum door thickness - 1 3/4"
- Not for use with swing-clear hinges, pocket pivots, butt hinges larger than 6", 1 1/2" offset pivots or center hung doors

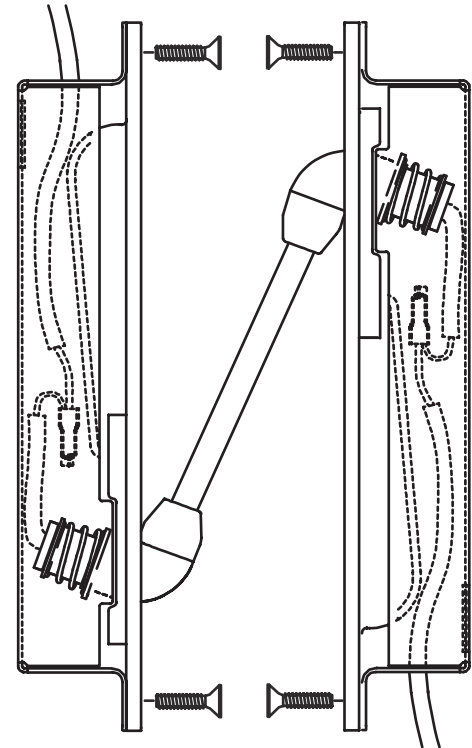

Can be used in combination with the following hinges:

HINGE TYPE	MAXIMUM DOOR SWING
Butt Hinges up to 5" wide	180°
5 1/2" wide butt hinges	130°
6" wide butt hinges	110°
Up to 3/4" offset pivots	180°

WARNING: Not for use with swing-clear hinges, pocket pivots, butt hinges larger than 6", 1 1/2" offset pivots or center hung doors

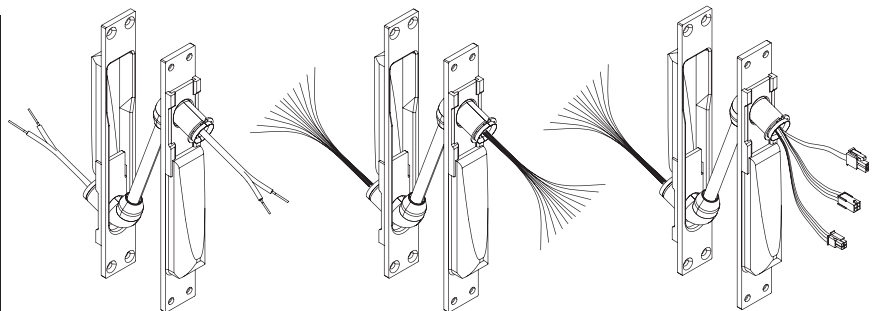

CRPT-2

CRPT-10

CRPT-10C

ITEM #	DESCRIPTION	FINISH	UNIT	MC QTY
CRPT-2	- (2) 18 AWG Wires - Max. Rating: Up to 2 AMPS @ 24V DC, 2A or 120V AC NEC Class 3	ALUM	EACH	10
		DURO		
CRPT-10	- (10) 24 AWG Wires - Max. Rating: Up to 1 AMP @ 24V DC, 1A	ALUM	EACH	
		DURO		
CRPT-10C	- (10) 24 AWG Wires - Max. Rating: Up to 1 AMP @ 24V DC, 1A - 3 separate quick-link connectors for a more organized connection	ALUM	EACH	
		DURO		