

# COMMANDER

## CLUTCH MECHANISM

## INTERCHANGEABLE CORE FOR SCHLAGE OPTIONAL THRU BOLT INSTALLATION




**LIFETIME  
WARRANTY**


**MEETS**  
*The Buy American Act*



Meets ADA requirements  
Specially designed for Barrier Free Application  
Conforms with ANSI A156.2 Series 4000, Grade 2  
Exceeds 400,000 cycles

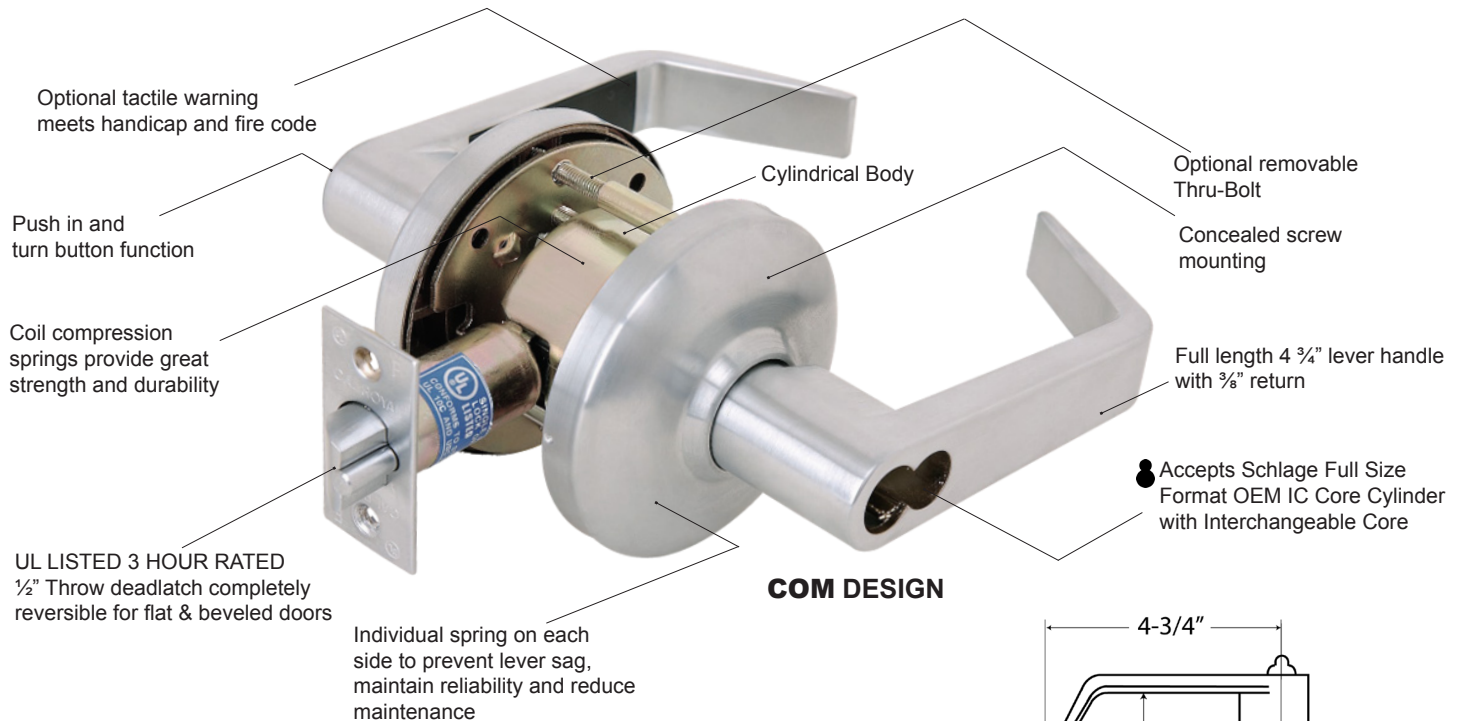

### COM DESIGN

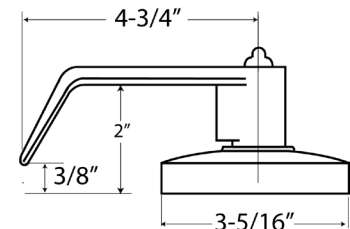

## SPECIFICATIONS

### APPLICATIONS

For offices, schools, hospitals, apartments, hotel / motel, residential, commercial and public buildings.

### DOOR RANGES

1 3/8" to 1 3/4" thickness doors.

### BACKSET

2 3/4" Standard, 2 3/8", 3 3/4" and 5" optional.

### LATCH FACEPLATE

2 1/4" x 1 1/8", adjustable for flat or beveled doors 1/8" in 2", for 2 3/4" backset.  
Optional 2 1/4" x 1" for 2 3/8" backset.

### EXPOSED TRIM

Wrought brass, bronze or stainless steel, levers are Zinc casting, plated to match trim finish.

### STRIKES

ASA strike standard, "T" and full lip strike available on request.

### LATCH BOLT

1/2" Throw solid brass, reversible for RH or LH applications. UL Listed.

### ANSI STANDARDS

Meets or exceeds requirements of BHMA / ANSI A156.2 Series 4000, Grade 2 (FF-H 106C), 400,000 cycles.

**TACTILE & LEAD LINING** available upon request.

### INTERCHANGEABLE CORE (IC)

Interchangeable Core locks will accept Schlage full size format OEM Interchangeable core cylinder, and compatible Schlage 6-pin Interchangeable Core. Interchangeable Core offered by Cal-Royal. See reverse page.

# COMMANDER SERIES FINISHES AND FUNCTIONS




**LIFETIME  
WARRANTY**

## FINISHES AVAILABLE


BHMA SYMBOL	US CODE	DESCRIPTION
605	US3	Polished Brass
606	US4	Satin Brass
609	US5	Antique Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
625	US26	Polished Chrome
626	US26D	Satin Chrome

Refer to price list for stock finishes and functions

## DOOR PREPARATION

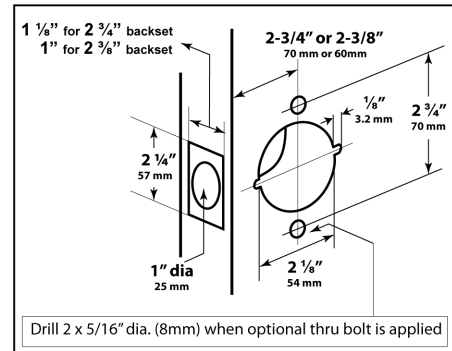


### ICCOM00 ANSI: F109



#### ENTRANCE / OFFICE LOCK

Turn / Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.


### ICCOM03 ANSI: F84



#### CLASSROOM LOCK

Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latch bolt is operated by turning inside lever.


### ICCOM05 ANSI: F86



#### STOREROOM LOCK

Dead locking latch bolt operated by key in outside lever or by rotating inside lever. Outside lever is always fixed.

## Large Format 6 Pin Interchangeable Cores compatible to SCHLAGE 6 Pin Interchangeable Core



ITEM #	DESCRIPTION
<b>3000ICC</b>	6 Pin "C" keyway combined SCHLAGE large format IC core cylinder KA# 111111 with "C" key blanks
<b>4000ICCK</b>	6 Pin "C-K" keyway combined SCHLAGE large format IC core cylinder KA# 111111 with "E" key blanks
<b>5000ICE</b>	6 Pin "E" Keyway combined SCHLAGE large format IC core cylinder KA# 111111 with "E" key blanks
<b>1000ICC</b>	6 Pin "C" Keyway combined SCHLAGE large format IC core cylinder KD and MK
<b>2000ICCC</b>	Temporary Construction Cores (Keyed alike)
Available Finishes: US3, US26D	

**(IC)** Accepts Schlage Full Size Format OEM IC Core Cylinders with Interchangeable Core.

**OTHER FUNCTIONS NOT LISTED AVAILABLE UPON REQUEST**