

**JHIL SERIES**  
**INTERCONNECTED LOCKS**  
**OPTIONAL 4" or 5 1/2" CTC BORE**  
**ANSI A156.12 GRADE 2**



**LIFETIME WARRANTY**


**MEETS**  
*The Buy American Act*

1" (25mm) Throw. Adjustable  
2 3/8" - 2 3/4" deadbolt latch  
with concealed hardened  
steel roller

Standard 2 1/4" x 1". Packed  
with 1/8" plastic filler to convert  
1" face plate to 1 1/8" wide  
door preparations

1/2" (13mm) Throw universal  
deadlatch reversible RH / LH,  
adjustable front for flat or  
beveled doors. UL Listed  
3 Hour Rated

Unique individual spring on  
exterior and interior side of  
lever to prevent lever sag

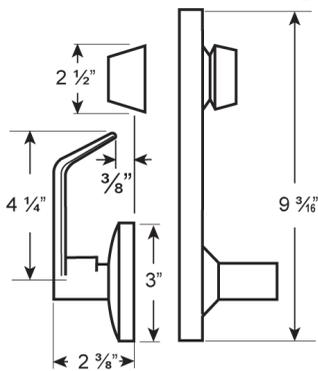

Meets ADA requirements  
Specially designed for Barrier Free Application  
Conforms with ANSI A156.12 Series 5000, Grade 2  
Exceeds 400,000 cycles

ADA  
Thumbturn  
Design



Precision solid brass 6-pin "C" keyway.

Available with Small Format Interchangeable Core on deadbolt and lever



Available with Interchangeable Core on deadbolt and lever.  
Available with Schlage Large Format Interchangeable Core on deadbolt only.



Available with Interchangeable Core on deadbolt and lever.  
Available with Schlage Large Format Interchangeable Core on deadbolt only.



Available with Interchangeable Core on deadbolt and lever.  
Available with Schlage Large Format Interchangeable Core on deadbolt only.


# JHIL SERIES FINISHES, FUNCTIONS AND SPECIFICATIONS



FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
605	US3	Polished Brass
606	US4	Satin Brass
609	US5	Antique Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
625	US26	Polished Chrome
626	US26D	Satin Chrome

Refer to price list for stock finishes and functions

## DOOR PREPARATION

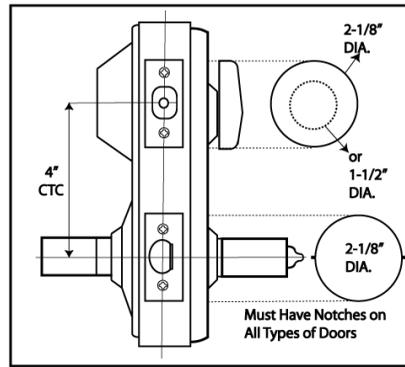

**LIFETIME WARRANTY**



## SPECIFICATIONS

**GENERAL SPECIFICATIONS:** Simultaneous retraction on both latch and deadbolts from inside by turning the lever in a panic-proof exit situation. Top lock is heavy duty deadbolt with the bottom lock having a cylindrical body. High security with a double locking point using the keyed lock function.

**ANSI STANDARDS:** Meet ANSI A 156.12 Series 5000 Grade 2 Requirements.

**CYLINDER & KEYWAY:** 6 pin solid brass "C" keyway, Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59 / 60, Sargent LA-LB-LC, Falcon / Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High security Cylinders.

**INTERCHANGEABLE CORE:** Interchangeable Core Locks will accept compatible 6 or 7 pin cores with BEST, FALCON & ARROW. Prefix "IC" before part number. Available combined or uncombined. Temporary construction cores and factory keying with control key & master key available.

**LARGE FORMAT INTERCHANGEABLE CORE:** Interchangeable Core Locks for Schlage. Prefix "ICSC" before part number.

**HOUSING:** Steel and Zinc dichromate finish for rust resistance.

**STRIKES:** Standard "T" strike furnished with lockset. 2 3/4" x 1 1/8" square strike with deadbolt.

**ESCUTCHEON:** 9 3/16" x 3 3/16" brass plated. Packed with interior escutcheon. Optional external escutcheon available.

**FUNCTIONS:** Entrance (Double Locking), Classroom, Storeroom and Dummy available upon request.


**DEADBOLT:** 1" Throw. Adjustable 2 3/4" or 2 3/8" Brass with hardened steel pin. Standard 2 1/4" x 1" face plate, packed with 1/8" plastic filler for 1 1/8" door prep.

**LATCH BOLT:** 1/2" Throw. "UL" Listed for 3 hour doors. 2 3/4" standard backset with 2 3/8" optional.

**LATCH FACEPLATE:** Standard 2 1/4" x 1" face plate, packed with 1/8" plastic filler for 1 1/8" door preparations.


**DOOR RANGE:** 1 3/8" - 1 3/4"

**TRIM:** JHIL, DOVER, MANHATTAN and ROCHESTER designs. Refer to picture in front page. Lever length is 4 1/4".



### JHIL30 ENTRANCE, SINGLE LOCKING

Deadbolt thrown or retracted by key in upper lock from outside or by inside turn unit. Latch bolt retracted by lever from either side. Lever retracts deadbolt and latch bolt simultaneously for immediate exit.



### JHIL00 ENTRANCE, DOUBLE LOCKING

Deadbolt thrown or retracted by key in upper lock from outside or by inside turn unit. Dead latch retracted by key in outer when locked by pushing turn button in inner lever. Outer lever may be fixed in locked position by rotating turn button. Turning inside lever retracts deadbolt and latch bolt simultaneously for immediate exit.

**HOW TO ORDER:**  
When ordering JHIL DOV design, replace design name.  
Example:  
JHIL00 in DOV is JHILDOV00

## OTHER FUNCTIONS NOT LISTED ARE AVAILABLE UPON REQUEST

● Indicates **deadbolts** that are available with a Small Format Interchangeable Core. Interchangeable Core deadbolts will accept compatible 6 or 7 pin Core with Best, Falcon and Arrow. Prefix "IC" before part number.

● Indicates **deadbolts** that are available with Large Format Interchangeable Core. Large Format Interchangeable Core deadbolts for Schlage. Prefix "ICSC" before part number.