

POWER TRANSFER DOOR LOOPS *List Price*

Heavy Duty Armored Door Loop




DLM30 US32D

FEATURES & SPECIFICATIONS:

- **Surface Mounted** Power Transfer Armored Door Loop
- Stainless Steel Armored Flex Cable Conduit
- Aluminum End Caps
- Length of Conduit: 15 3/4" (400mm)
- Inside Conduit Diameter: 3/8" (9mm)
- Outside Conduit Diameter: 1/2" (12mm)
- Used for Wood or Hollow Metal Doors and Frames
- **1-Year Warranty**

Armored Door Loop




DLP20 US32D

FEATURES & SPECIFICATIONS:

- **Surface Mounted** Power Transfer Armored Door Loop
- Stainless Steel Armored Flex Cable Conduit
- Silver Plastic End Caps
- Length of Conduit: 15 3/4" (400mm)
- Inside Conduit Diameter: 1/4" (7mm)
- Outside Conduit Diameter: 7/16" (10.7mm)
- Used for Wood or Hollow Metal Doors and Frames
- **1-Year Warranty**

Concealed Door Loop




DLC40 US32D

FEATURES & SPECIFICATIONS:

- **Mortise Mounted** Power Transfer Door Loop
- Stainless Steel Flex Conduit and Case
- Square Mounting Tabs for easy recessed installation
- Dimensions: 11 7/16" L x 15/16" W x 13/16" D
(290mm L x 24.5mm W x 20mm D)
- Inside Conduit Diameter: 3/8" (10mm)
- Outside Conduit Diameter: 9/16" (14.5mm)
- Used for Hollow Metal Doors and Frames
- **1-Year Warranty**

DOOR POSITION MONITORING SWITCH *List Price*

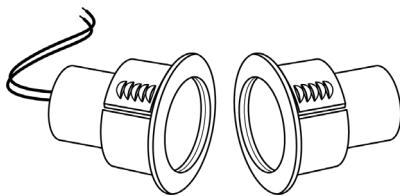

SOLD PER BAG
 (5 pairs per bag)

ITEM #	FINISH
DPMS-75	BLACK
	WHITE

FEATURES & SPECIFICATIONS:

- Used for Door Status Monitoring
- Provides Normally Closed (SPST) Switch
- Easy Installation in Wood, Hollow Metal, or Aluminum Doors & Frames
- Recessed Magnetic Contact
- Hole Prep: 3/4" Diameter x 1" Deep
- Contact Rating: 0.5A @ 75VDC / 100VAC
- **Wood** Door / Frame Operating Distance: 9/16" (15mm) max
- **Metal** Door / Frame Operating Distance: 1/2" (13mm) max
- Gap Width: 3/8" (10.2mm)
- Wire Length: ± 9 13/16" (249.9mm)
- Lifetime (Resistive Loads): 1,000,000 (75 VDC, 100mA)
- Operating Temperature: -40°~125°C