


T5000 & TF5000 Rim Type Panic And Fire Exit Devices T5000V & TF5000V Vertical Rod Panic And Fire Exit Devices

MADE IN TAIWAN
ANSI A156.3, Grade 1

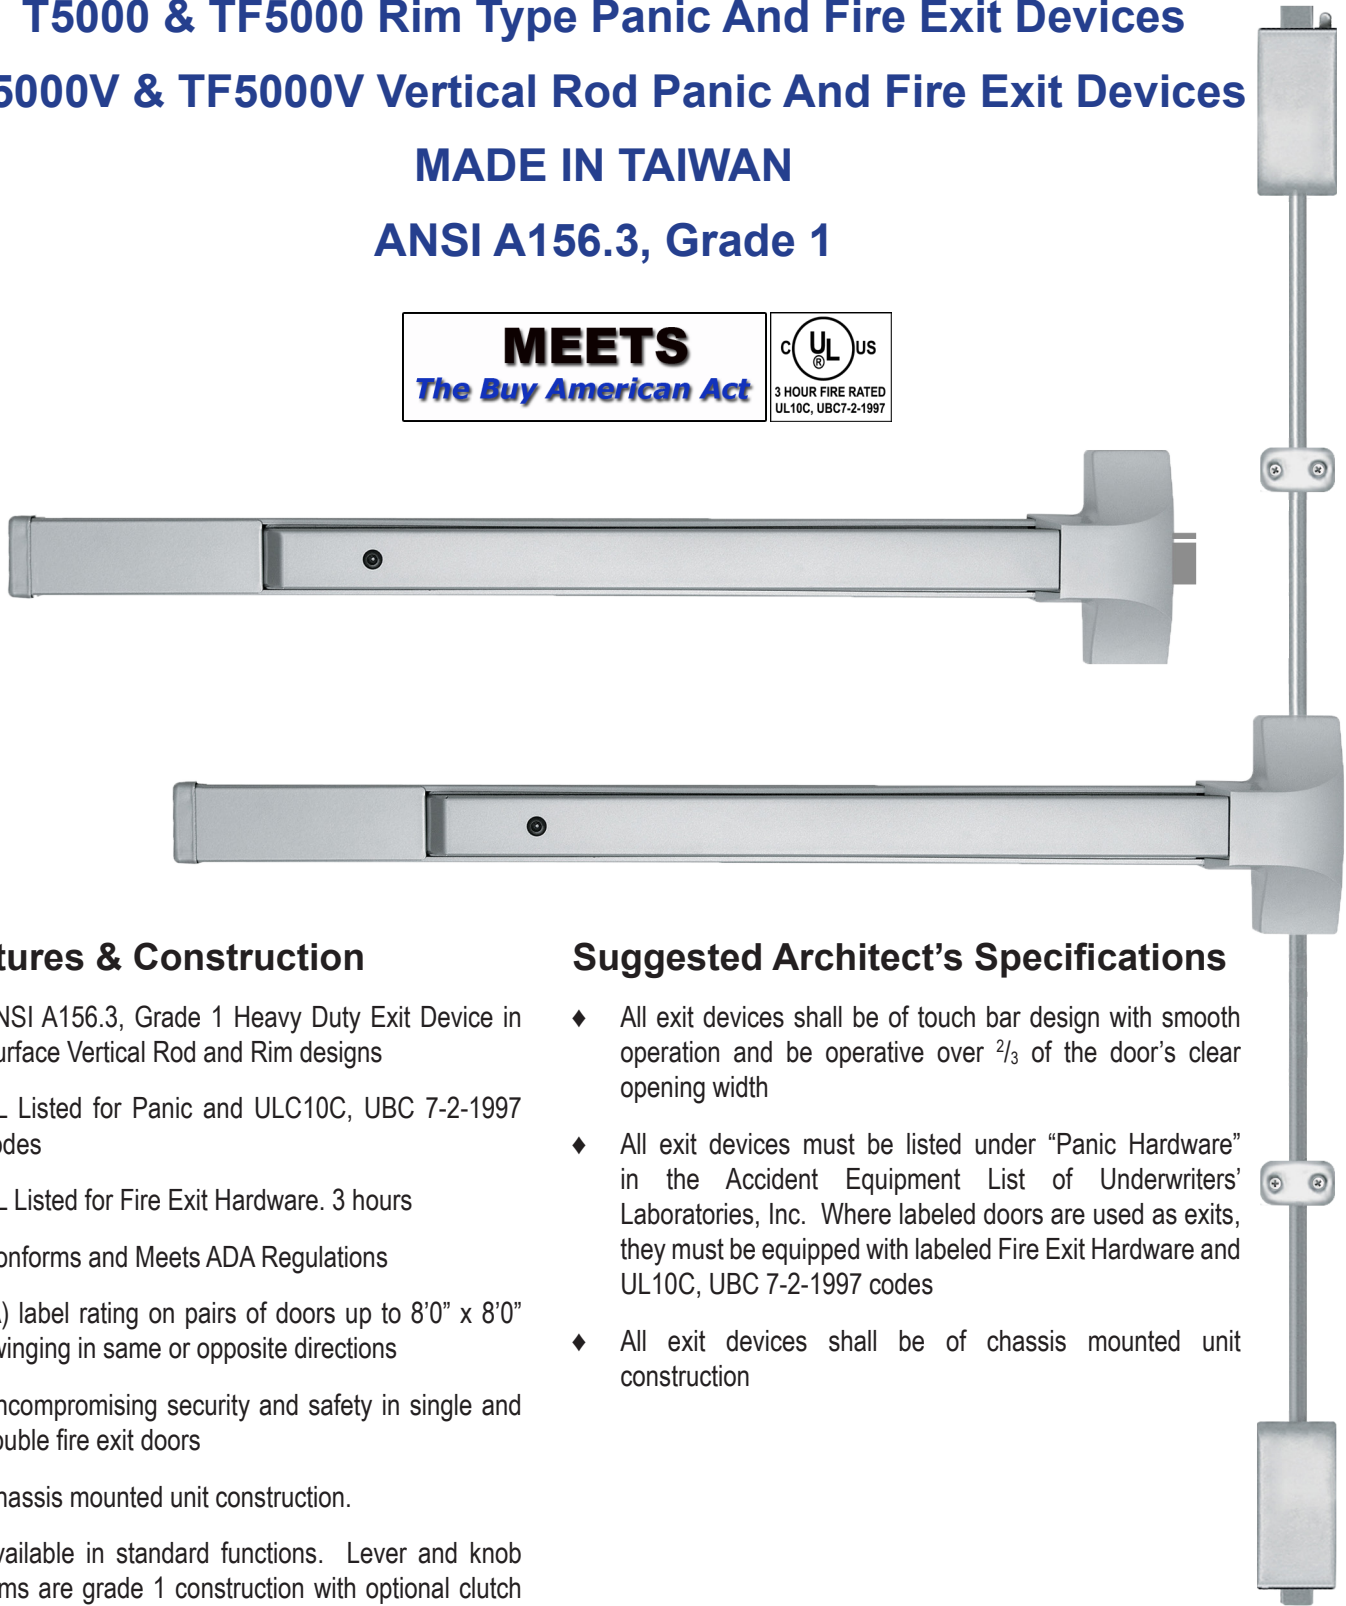

Features & Construction

- ◆ ANSI A156.3, Grade 1 Heavy Duty Exit Device in Surface Vertical Rod and Rim designs
- ◆ UL Listed for Panic and ULC10C, UBC 7-2-1997 codes
- ◆ UL Listed for Fire Exit Hardware. 3 hours
- ◆ Conforms and Meets ADA Regulations
- ◆ (A) label rating on pairs of doors up to 8'0" x 8'0" swinging in same or opposite directions
- ◆ Uncompromising security and safety in single and double fire exit doors
- ◆ Chassis mounted unit construction.
- ◆ Available in standard functions. Lever and knob trims are grade 1 construction with optional clutch freewheeling mechanism. Rose covers 161 cut out


Suggested Architect's Specifications

- ◆ All exit devices shall be of touch bar design with smooth operation and be operative over $\frac{2}{3}$ of the door's clear opening width
- ◆ All exit devices must be listed under "Panic Hardware" in the Accident Equipment List of Underwriters' Laboratories, Inc. Where labeled doors are used as exits, they must be equipped with labeled Fire Exit Hardware and UL10C, UBC 7-2-1997 codes
- ◆ All exit devices shall be of chassis mounted unit construction

T5000 & TF5000 Series

MADE IN TAIWAN

GRADE 1 Rim Type Exit Device

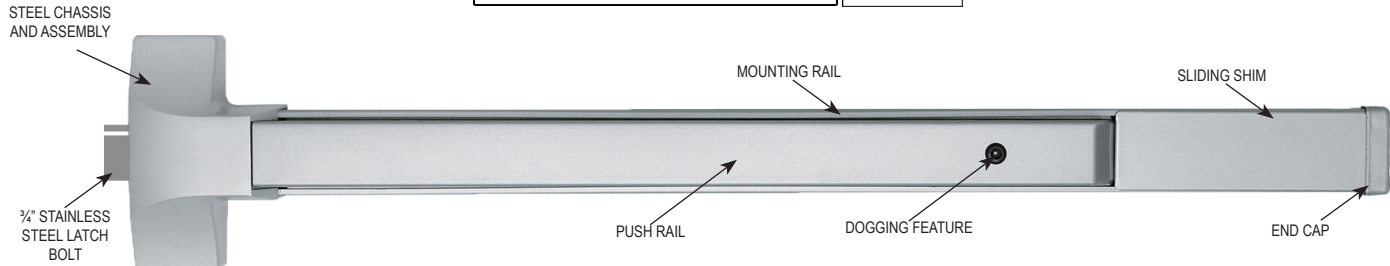

Specifications

For Doors.....	1 3/4" thick standard. 3 3/4" minimum stile width required for single or double door application using standard 938 strike and pull or lever trims
Chassis.....	Steel (Panic Grade), Steel (Fire Grade)
Cover.....	Covers stock hollow metal doors with 161-cutout
Mounting.....	Furnished standard with wood and machine screws. Available with thru-bolts on request. Thru-bolts are standard packaging on fire rated devices
End Cap.....	Steel construction
Hand.....	Non-handed, center hub
Latch Bolt.....	Stainless Steel 3/4" throw
Spring.....	Steel throughout
ANSI Standard.....	A156.3, Grade 1
Rail Assembly.....	Heavy gauge steel, painted
Strike.....	938 packed standard (See strike page)
Dogging Feature.....	Allen-type key furnished standard on non-fire labeled devices
Mullion.....	Available
UL and ULC Listed.....	T5000 Series for panic. TF5000 Series for fire exit hardware for all types of 3' x 7' single doors and 6' x 7' double doors for up to 3 hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes
Finish.....	Aluminum (ALUM), Stainless Steel (US32D)
Anti-Microbial Coating.....	Available on US32D only. Use part # ANTB-EXIT

DIMENSIONS

Touchbar height to finished floor 41" (1041 mm) at center

Touchbar projection

Neutral	2 1/2" (64 mm)
Depressed	1 3/4" (45 mm)

MODEL	ACTUAL LENGTH	MAX CUT DOWN	DOOR SIZE
T5000EO36 and TF5000EO36	32"	6"	30" to 36" door width
T5500EO48 and TF5500EO48	39"	12"	31" to 48" door width

Minimum Stile Requirements
4" escutcheon trims and
4 1/2" for thumbpiece and rose trims

SINGLE DOOR 4 1/2" MIN. STILE

Minimum Stile Requirements
Double Door with Two Vertical
Rod Type Exit Devices

3 1/2 MIN. STILE