



GLS9800 & FGLS9800 Series

GRADE 1 Rim Type Narrow Stile Exit Device

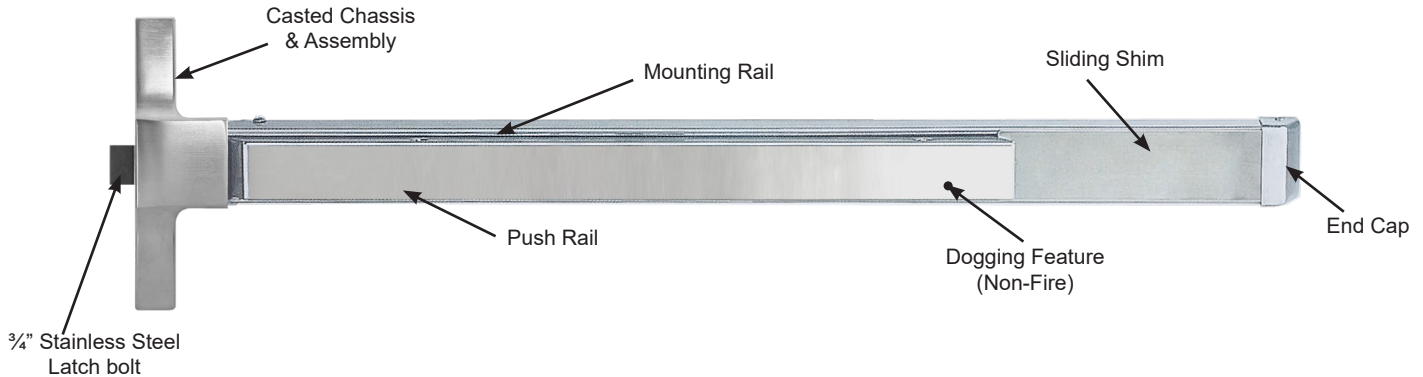


Specifications

For Doors	Wood, Metal or Aluminum Glass doors with 1 3/4" minimum stile width, 1 3/4" thickness for single or double door application
Chassis	Non-ferrous Alloy (Panic Grade)
Cover	Non-ferrous plated material.
Mounting	Furnished with wood and machine screws. Thru-bolts available upon request.
End Cap	Brass, Bronze or Stainless Steel construction
Alarm	Available for 36" bar only. Prefix "NALRM" before PART #
Hand	Non-handed
Latch Bolt	Stainless Steel 3/4" throw
Spring	Stainless Steel throughout
ANSI Standard	A156.3, Grade 1
Rail Assembly	Heavy gauge extruded aluminum body with Stainless Steel push pad
Strike	246 packed standard. Optional 247 strike. (See strike page)
Dogging Feature	Available for 36" bar only. Allen-type key furnished standard.
Mullion	Available
UL and ULC Listed	GLS9800 Series for Panic & Safety for all types of 4' x 8' single doors and 8' x 8' double doors. FGLS9800 Series for all types of 4' x 8' single doors for up to 3 hour fire labeled installations. Conforms to UL10C and UBC7-2-1997 codes.
Finish	Architectural plated finishes
Electronic Functions	(ELR) Electrical Latch Retraction and RX & LX Signal Switch available
Anti-Microbial Coating	Available on US32D only. Use part # ANTB-EXIT



246 STRIKE



247 STRIKE (OPTIONAL)

DIMENSIONS

Push Rail height to finished floor 41" (1041 mm) at center

Push Rail projection

Neutral	2 3/4" (70 mm)
Depressed	1 7/8" (48 mm)

Center case 8 7/16" x 1 1/8" x 2" (205 mm x 29 mm x 51 mm)

MODEL	ACTUAL LENGTH	MAX CUT DOWN	DOOR SIZE
GLS9800EO36, FGLS9800EO36	34 17/32"	10"	30" to 36" width
GLS9800EO48, FGLS9800EO48	46 11/32"	12"	36" to 48" width