



# GLS9800 & FGLS9800 Series

## GRADE 1 Rim Type Narrow Stile Exit Device

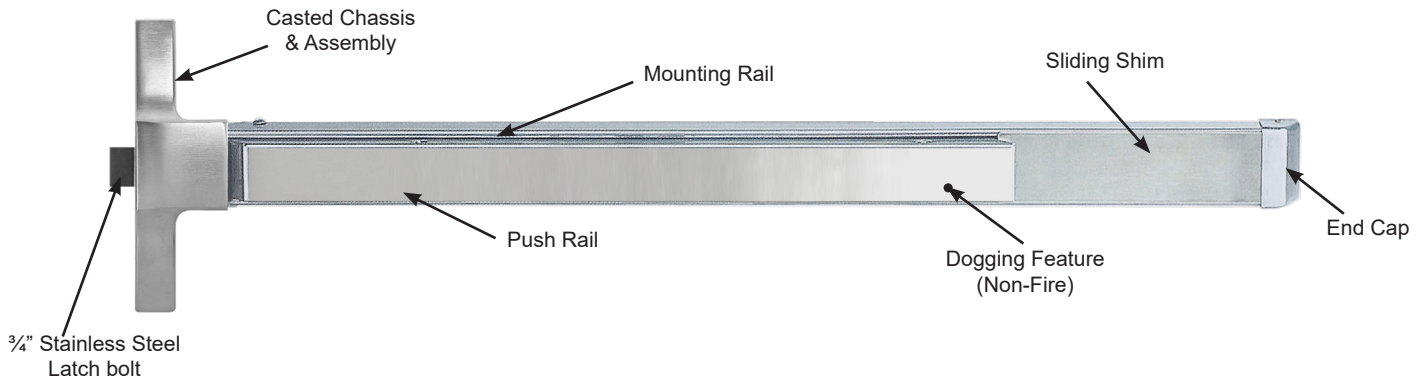


### Specifications

<b>For Doors</b> .....	Wood, Metal or Aluminum Glass doors with 1 3/4" minimum stile width, 1 3/4" thickness for single or double door application
<b>Chassis</b> .....	Non-ferrous Alloy (Panic Grade)
<b>Cover</b> .....	Non-ferrous plated material.
<b>Mounting</b> .....	Furnished with wood and machine screws. Thru-bolts available upon request.
<b>End Cap</b> .....	Brass, Bronze or Stainless Steel construction
<b>Alarm</b> .....	Available for 36" bar only. Prefix "NALRM" before PART #
<b>Hand</b> .....	Non-handed
<b>Latch Bolt</b> .....	Stainless Steel 3/4" throw
<b>Spring</b> .....	Stainless Steel throughout
<b>ANSI Standard</b> .....	A156.3, Grade 1
<b>Rail Assembly</b> .....	Heavy gauge extruded aluminum body with Stainless Steel push pad
<b>Strike</b> .....	246 packed standard. Optional 247 strike. (See strike page)
<b>Dogging Feature</b> .....	Allen-type key furnished standard. Cylinder Dogging kit available for 36" bar only.
<b>Mullion</b> .....	Available
<b>UL and ULC Listed</b> .....	GLS9800 Series for Panic & Safety, FGLS9800 Series for Fire Exit hardware for all types of 4' x 8' single doors and 8' x 8' double doors for up to 3 hour fire labeled installations. Conforms to ANSI/UL 10C, ANSI/UL 305 standards.
<b>Finish</b> .....	Architectural plated finishes
<b>Electronic Functions</b> .....	(ELR) Electrical Latch Retraction and RX & LX Signal Switch available
<b>Anti-Microbial Coating</b> .....	Available on US32D only. Use part # ANT-B-EXIT

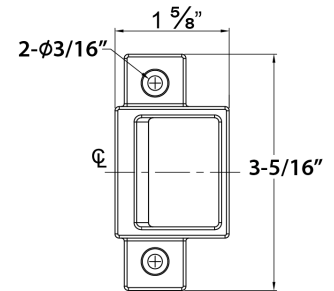

**246 STRIKE**

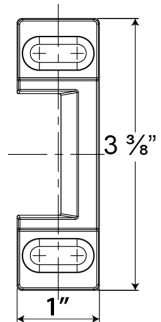

**247 STRIKE (OPTIONAL)**

### DIMENSIONS

<b>Push Rail height to finished floor</b>	41" (1041 mm) at center		
<b>Push Rail projection</b>			
Neutral	2 3/4" (70 mm)		
Depressed	1 7/8" (48 mm)		
<b>Center case</b>	8 1/16" x 1 1/8" x 2" (205 mm x 29 mm x 51 mm)		
<b>MODEL</b>	<b>ACTUAL LENGTH</b>	<b>MAX CUT DOWN</b>	<b>DOOR SIZE</b>
GLS9800EO36, FGLS9800EO36	34 17/32"	10"	30" to 36" width
GLS9800EO48, FGLS9800EO48	46 11/32"	12"	36" to 48" width