

# HEAVY DUTY SURFACE OVERHEAD DOOR HOLDER AND STOPS

## HD660 SERIES

### Application


- Interior or exterior doors
- Doors are single acting
- Non-handed
- Recommended for high traffic, heavy abuse installations

### Features

- **Heavy duty surface**
- Slide track design
- Heavy shock absorber spring provides 5-7° compression before deadstop
- Stop or hold-open function
- Complete screw packet with thru-bolts for door, wood and machine screws for frame
- Durable slider cam
- 110° maximum opening
- 1 3/4" minimum door thickness
- 1 3/16" square channel

### Compliance

- ANSI A156.8 UL Listed as STOP Function

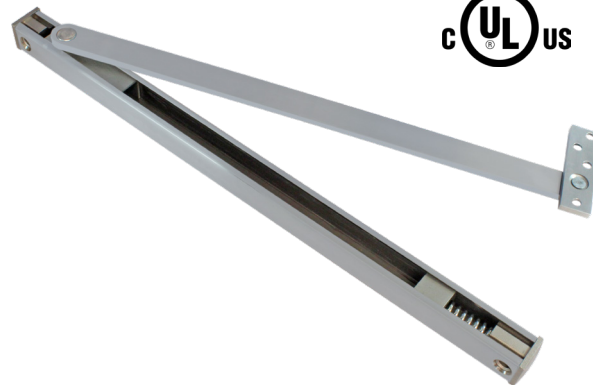

DOOR OPENING CHART				
MODEL #	SIZE	FUNCTION	BUTT OFFSET PIVOTS	CENTER HUNG PIVOTS
HD662S	2	STOP ONLY	*24" - 28"	25 1/2" - 30"
HD663S	3		28 1/16" - 33"	30 1/16" - 36"
HD664S	4		33 1/16" - 38"	36 1/16" - 41"
HD665S	5		38 1/16" - 43"	41 1/16" - 46"
HD666S	6		43 1/16" - 48"	46 1/16" - 50"
HD662H	2	HOLD-OPEN	*24" - 28"	25 1/2" - 30"
HD663H	3		28 1/16" - 33"	30 1/16" - 36"
HD664H	4		33 1/16" - 38"	36 1/16" - 41"
HD665H	5		38 1/16" - 43"	41 1/16" - 46"
HD666H	6		43 1/16" - 48"	46 1/16" - 50"

\*Butt hung only on this size door. No swing clear hinges  
Refer to the price list for stock sizes and finish.

### HEAVY DUTY SURFACE OVERHEAD STOPS AND HOLDERS CROSS-REFERENCE CHART

CAL-ROYAL	GLYNN JOHNSON	ABH	ROCKWOOD	RIXSON	DORMA
<b>STOP ONLY</b>					
HD662S	902S	9028	OH901S	9-136	902S
HD663S	903S	9021	OH902S	9-236	903S
HD664S	904S	9024	OH903S	9-336	904S
HD665S	905S	9026	OH904S	9-436	905S
HD666S	906S	9027	OH905S	9-536	906S
<b>HOLDER</b>					
HD662H	902H	9018	OH901H	9-126	902H
HD663H	903H	9011	OH902H	9-226	903H
HD664H	904H	9014	OH903H	9-326	904H
HD665H	905H	9016	OH904H	9-426	905H
HD666H	906H	9017	OH905H	9-526	906H