


**IND90-G2 ANSI GRADE 2
INDICATOR DEADBOLTS**
FOR COMMERCIAL APPLICATIONS





MEETS
The Buy American Act

Conforms with ANSI
A156.36, Grade 2
Exceeds 150,000 cycles

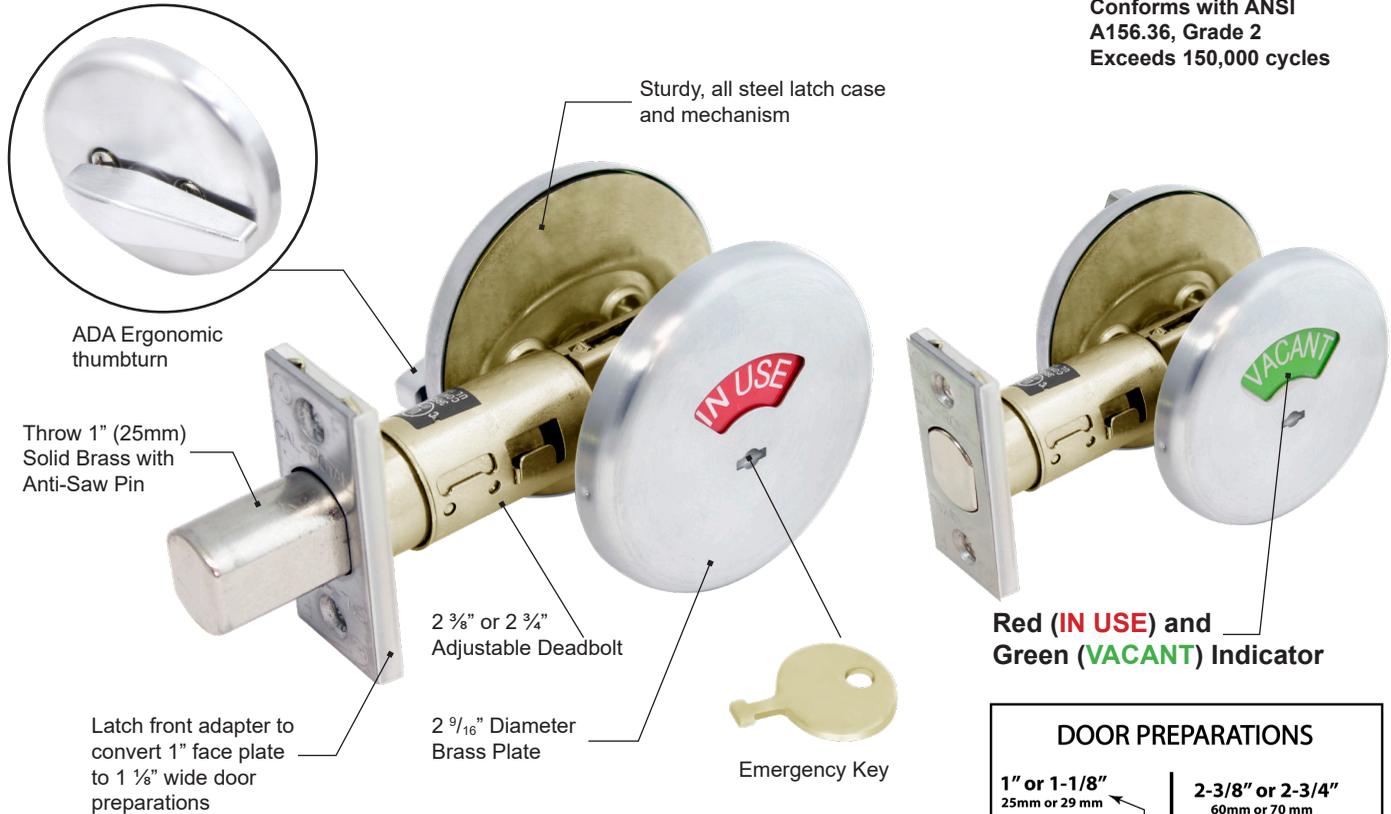

Red (**IN USE**) and Green (**VACANT**) Indicator

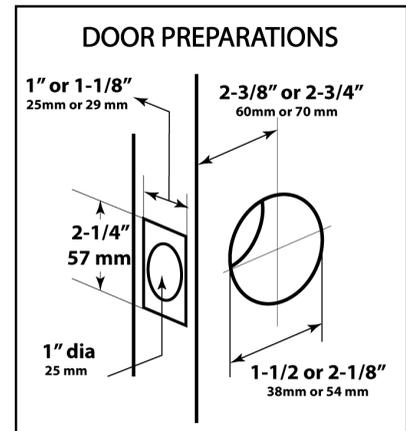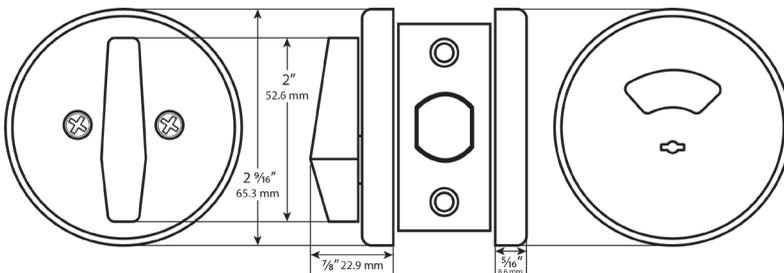

SPECIFICATIONS

TRIM

Wrought Brass or Stainless Steel.

DOOR RANGES

Adjustable 1 3/8" (35mm) to 1 3/4" (45mm) door thickness.

BACKSET

Adjustable UL Listed 3 Hour Fire Rated 2 3/8" or 2 3/4".

DEADBOLT FACEPLATE

Standard 2 1/4" x 1" packed with 1 1/8" plastic filler to convert 1" face plate to 1 1/8" wide door preparations.

BORE DIAMETER

1" for latch, 1 1/2" or 2 1/8" for lock housing.

STRIKE

1 1/8" x 2 3/4" square corner.

FINISHES

IND90-G2 is available in stock in US26D, US26, US10B, US4, US3 and US1 finishes. Refer to price list for other stock finishes and functions.