



INSTRUCTION FOR ESC45 NARROW STILE ESCUTCHEON LEVER TRIM

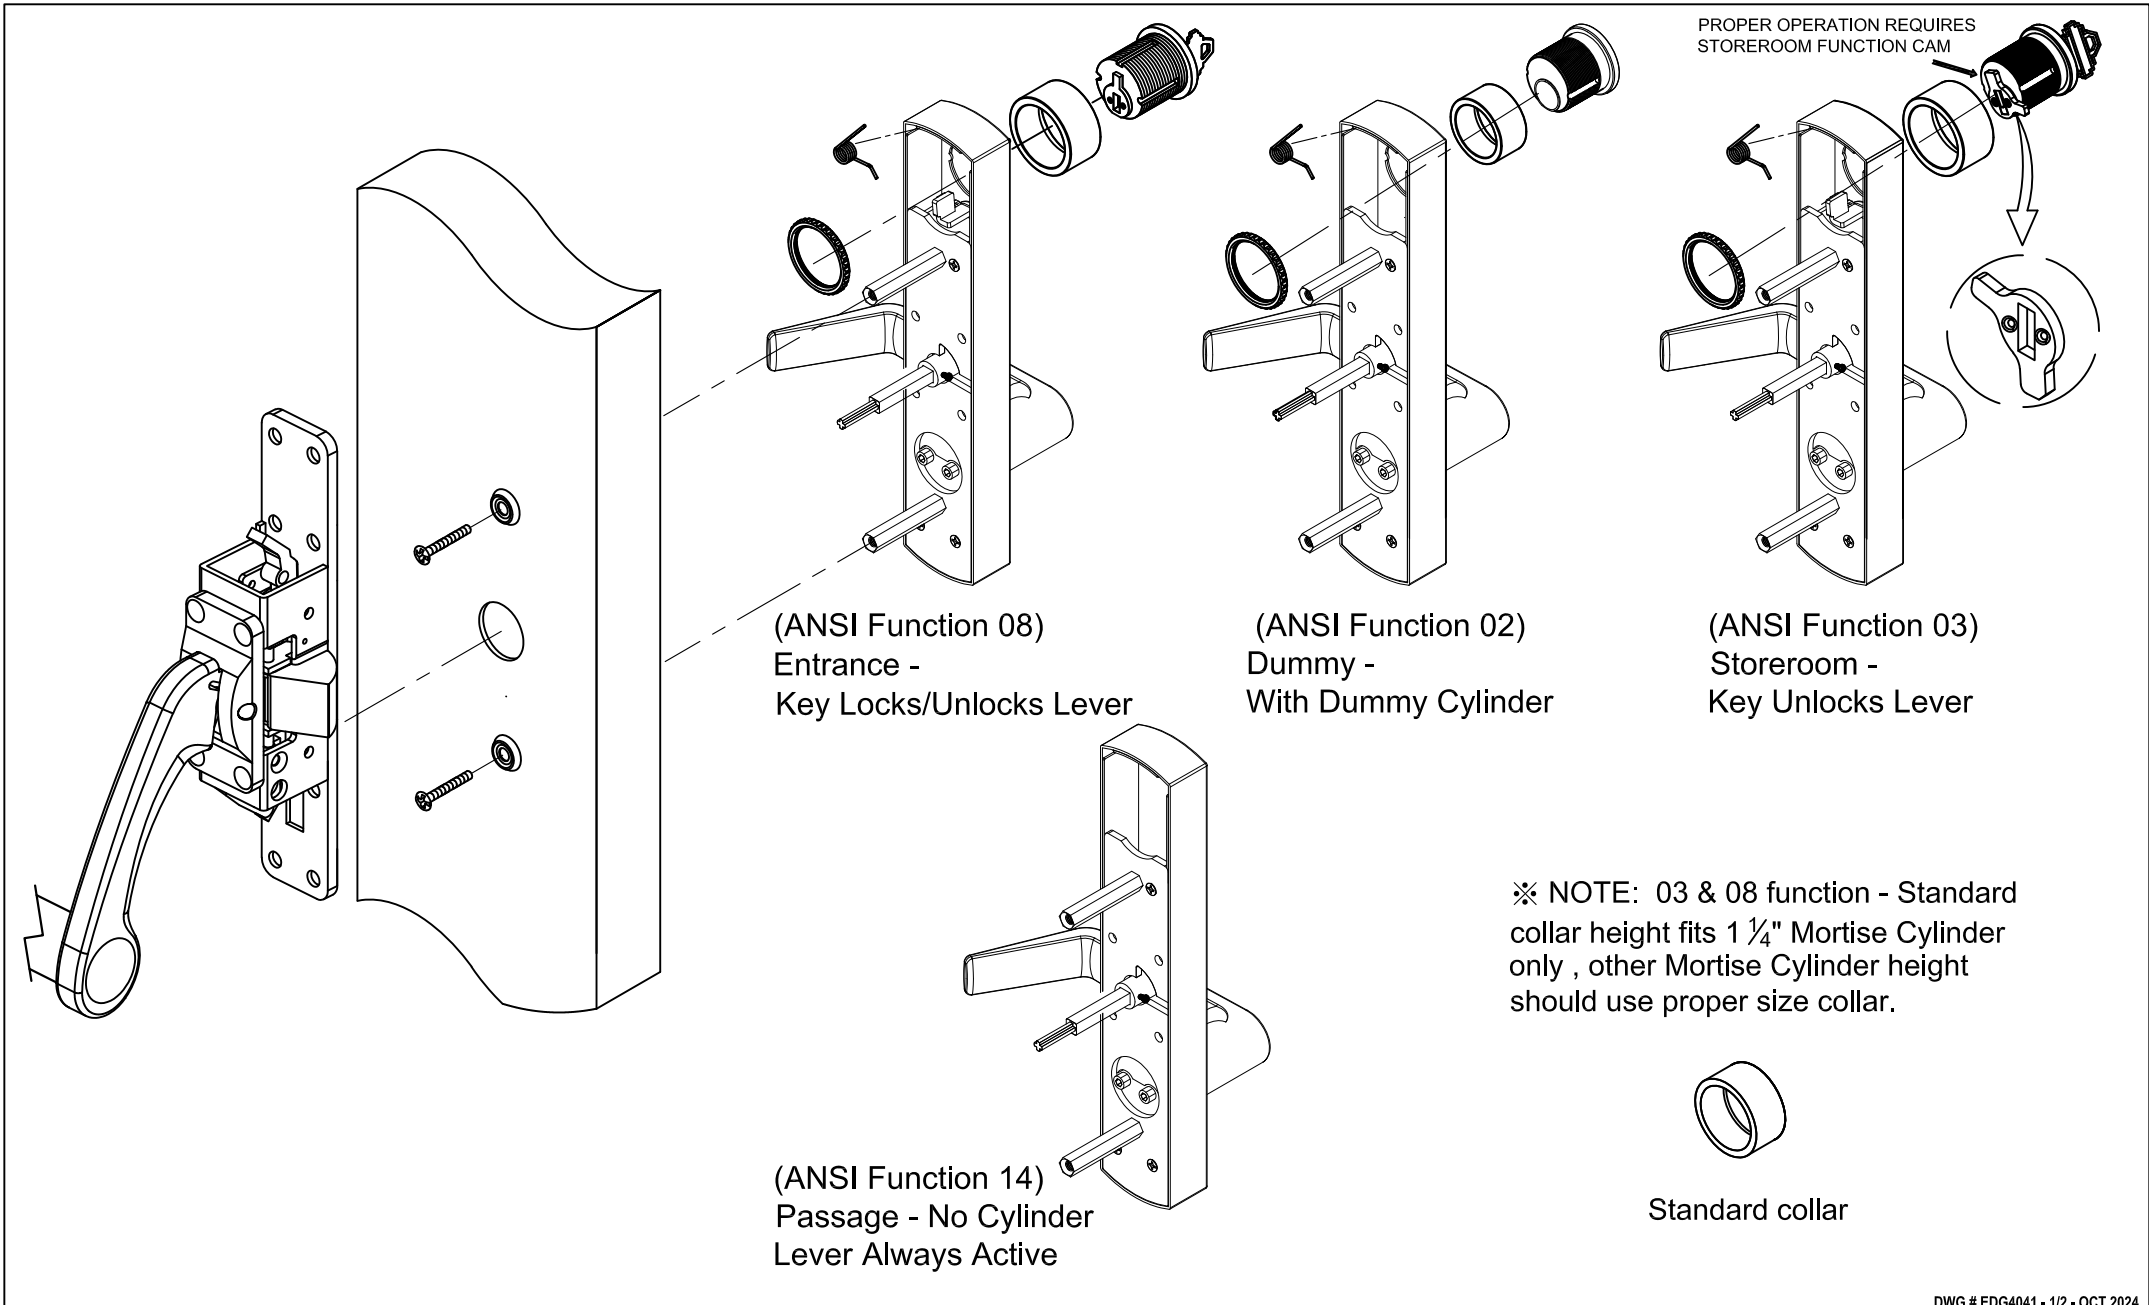

INSTRUCTION FOR SETTING HAND OF LEVER


(EXAMPLE FOR RH)

Step 1.
Trim shipped with lever in the neutral
(non-handed) position.




(Neutral Position)

Step 2.
Rotate lever to desired hand. Insert two lever
hex screws accordingly (not tighten yet).
Ensure the middle handed Phillips screw is
tighten and then tighten two lever hex screws
with hex wrench.

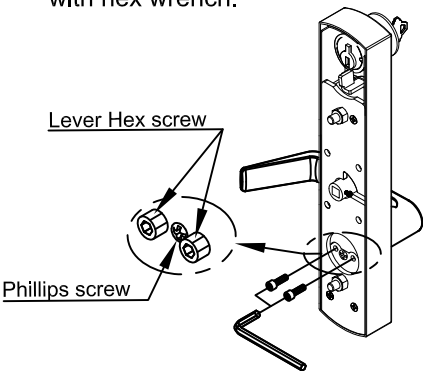

(RH)


Step 3.
Install (2) thru-bolts. Insert spindle base on
door thickness and fix set screw.
※ Suitable for door thickness
1 3/4" ~ 2 3/8" (45~60mm)

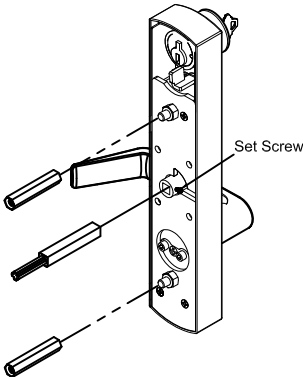

(RH)

※After setting, please ensure the (2) lever handing screws are tighten to avoid lever operating problems.

Cylinder installation:
(follow ①⇒②⇒③⇒④)
※ Standard collar height fits
1 1/4"~1 3/8" mortise cylinder.

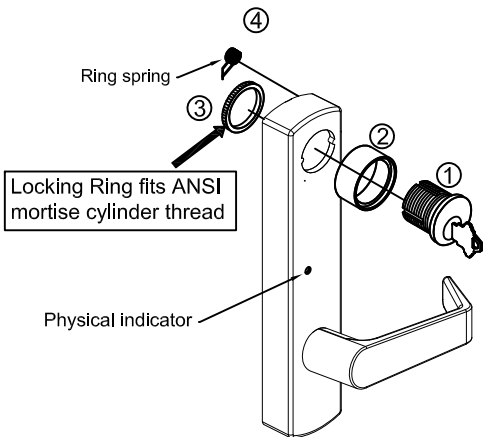

Parts List		
No	Parts	Q'ty
1	Trim	1
2	Thru. bolts	2
3	10#-24 Screw	2
4	Spindle	1
5	M5 screw	2
6	Washer	2
7	Allen Wrench	1
8	Instruction Guide	1
9	Template	1

