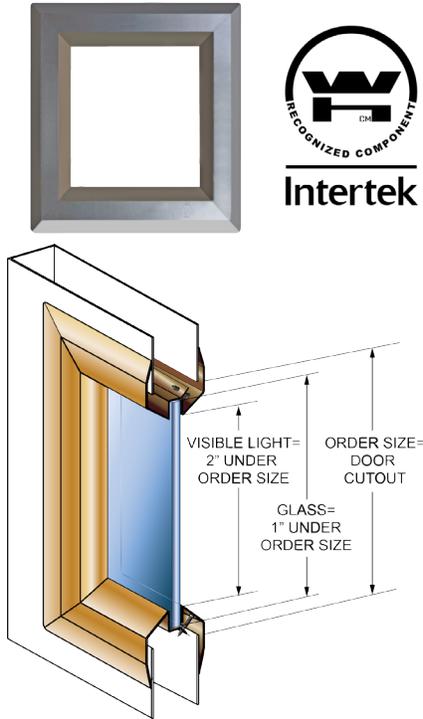
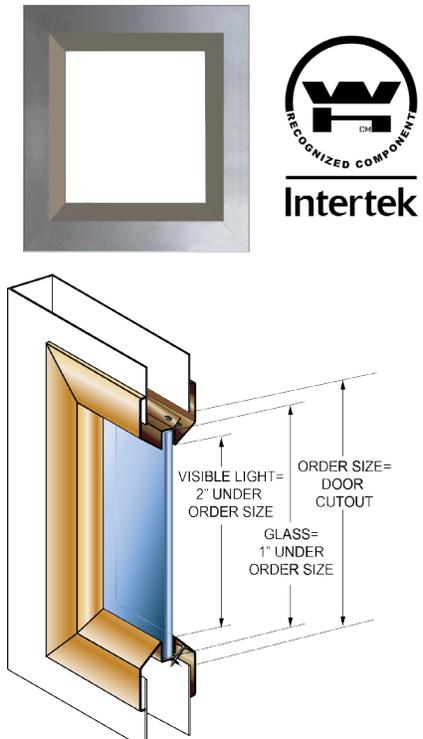


## 45-180 Minute Fire-Rated Steel Vision Kits\*

### SVL , Vision Lite Low Profile

ILLUSTRATION	SPECIFICATIONS
 <p><b>Intertek</b> RECOGNIZED COMPONENT</p>	<p>For use in fire rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN / ULS104 (2010), NFPA (201) and CSI CODE 0870 00.</p> <p><b>Specifications:</b></p> <ul style="list-style-type: none"> <li>- Low Profile Beveled Vision Lite</li> <li>- 20 Gauge Cold Rolled Steel</li> <li>- Mitered welded corners with counter sunk mounting holes</li> <li>- Single side attaching with matching mounting screws included</li> <li>- For use with <math>\frac{3}{16}</math>" to <math>\frac{1}{4}</math>" glass thickness</li> <li>- Designed for use with <math>1\frac{3}{4}</math>" doors only</li> <li>- Baked on powder coat finish</li> <li>- Color: Standard Bronze</li> <li>- Fastener: # 8 x <math>\frac{7}{8}</math>" flathead phillips head SMS</li> </ul> <p><b>Kit Options:</b></p> <ul style="list-style-type: none"> <li>- Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Tape.</li> <li>- Available glass types are Non-Fire Rated Tempered (<math>\frac{1}{4}</math>" ), Fire Rated PROTECT3™ Wired Safety (<math>\frac{1}{4}</math>" ) and Pyran® Platinum F Glass (<math>\frac{3}{16}</math>" )</li> </ul> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>- Order size is equal to opening size</li> <li>- Visible vision opening is 2" under order size</li> <li>- Glass size dimension is 1" under complete order size</li> <li>- Follow all door manufacturer's instructions for use and installation of all products</li> <li>* Refer to price list for list of fire rated sizes</li> <li>* Custom sizes are available. See price list.</li> </ul>

### VL , Vision Lite Standard Profile for $\frac{3}{16}$ " to $\frac{1}{4}$ " Thick Glass Frames 10VL , Vision Lite Standard Profile for 1" Thick Glass Frames

ILLUSTRATION	SPECIFICATIONS
 <p><b>Intertek</b> RECOGNIZED COMPONENT</p>	<p>For use in fire rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN/ULS104 (2010), NFPA (201) and CSI CODE 0870 00.</p> <p><b>Specifications:</b></p> <ul style="list-style-type: none"> <li>- Standard Profile Beveled Vision Lite</li> <li>- 20 Gauge Cold Rolled Steel</li> <li>- Mitered welded corners with counter sunk mounting holes</li> <li>- Single side attaching with matching mounting screws included</li> <li>- For use with <math>\frac{3}{16}</math>" to <math>\frac{1}{4}</math>" glass thickness</li> <li>- Also available for 1" glass thickness (10VL Series)</li> <li>- Designed for use with <math>1\frac{3}{4}</math>" doors only</li> <li>- Baked on powder coat finish</li> <li>- Color: Standard Bronze</li> <li>- Fastener: # 8 x <math>\frac{7}{8}</math>" flathead phillips head SMS</li> </ul> <p><b>Kit Options:</b></p> <ul style="list-style-type: none"> <li>- Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Tape.</li> <li>- Available glass types are Non-Fire Rated Tempered (<math>\frac{1}{4}</math>" ), Fire Rated PROTECT3™ Wired Safety (<math>\frac{1}{4}</math>" ) and Pyran® Platinum F Glass (<math>\frac{3}{16}</math>" )</li> </ul> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>- Order size is equal to opening size</li> <li>- Visible vision opening is 2" under order size</li> <li>- Glass size dimension is 1" under complete order size</li> <li>- Follow all door manufacturer's instructions for use and installation of all products</li> <li>* Refer to price list for list of fire rated sizes</li> <li>* Custom sizes are available. See price list.</li> </ul>