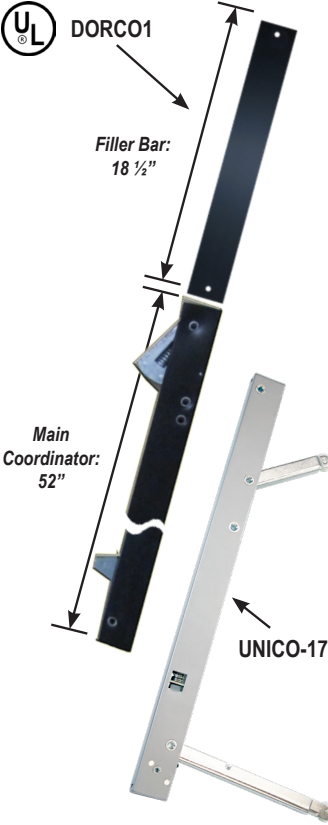


DOOR COORDINATORS

ILLUSTRATION	ITEM	SIZE	ITEM #	FINISH
	UL Listed, Gravity Coordinator - Used on pairs of doors with or without an astragal - Adjustable for ease of installation - It features a Nylon Roller to enable the inactive door to easily operate the coordinating device - Base Material: Forged Brass - Architectural finishes available - BHMA: 4.1.1 Type 21B	Projection: 7"	FRGCO65	US26D, US10B, 3, US4, 5, US10, 26
		Projection: 8"	FRGCO085	
 DORCO1 Filler Bar: 18 1/2" Main Coordinator: 52" UNICO-17	UL Listed, Door Coordinator - Door coordinator for fire labeled doors - Automatic coordinating device for sequential closing of paired doors with or without astragal - Non-handed - For use with frame openings 60", 72" or 84" - Includes 18 1/2" Filler Bar (FB1858) - Material: All Metal construction - Conforms to ANSI / BHMA A156.3, Type 21A	Dimensions: Main Coordinator: 52" Filler Bar: 18 1/2" Frame Openings: 60" and 72"	DORCO1	Black, Alum
	Filler Bar	18 1/2" for up to 72" door	FB1858	
		32" for up to 96" door	FB3258	
	Universal Door Coordinator - Used for pair of doors up to 8' wide. - Non-Handed; Adjustable arm lengths for multiple door sizes. - Stop mounted - no mounting brackets required when using stop mounted hardware. - Material: Steel	Dimensions: 20 1/8" x 1 9/16" x 13/16" Adjustable Arm Length: 7 3/4" up to 9 3/16"	UNICO-17	Black, Alum
	Carry Bar - Used on pair of doors with astragal - For situations when the inactive door can be opened first.	Plate: 1 3/4" x 2 1/4" Fasteners: 1/4" x 20 Sex Bolts	CBO-1	Black, Alum
 MB4250 MB4750	Mounting Brackets	Jamb Depth: 4 1/4" Stop Height: 5/8" Stop Width: 2 1/4" and over	MB4250	Black, Alum
		Jamb Depth: 4 3/4" Stop Height: 5/8" Stop Width: 7/8" to 2 1/4"	MB4750	