

MR9800 & FMR9800 Series

GRADE 1, Mortise Lock Exit Device





LIFETIME WARRANTY


BHMA™
CERTIFIED
 Be Safe. Be Secure. Look for the Mark.

MEETS
The Buy American Act

UL US
 3 HOUR FIRE RATED
 UL10C, UBC7-2-1997

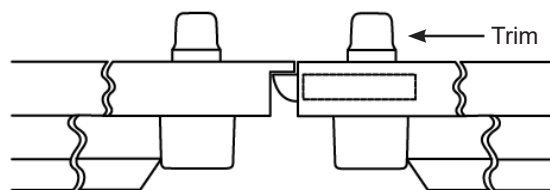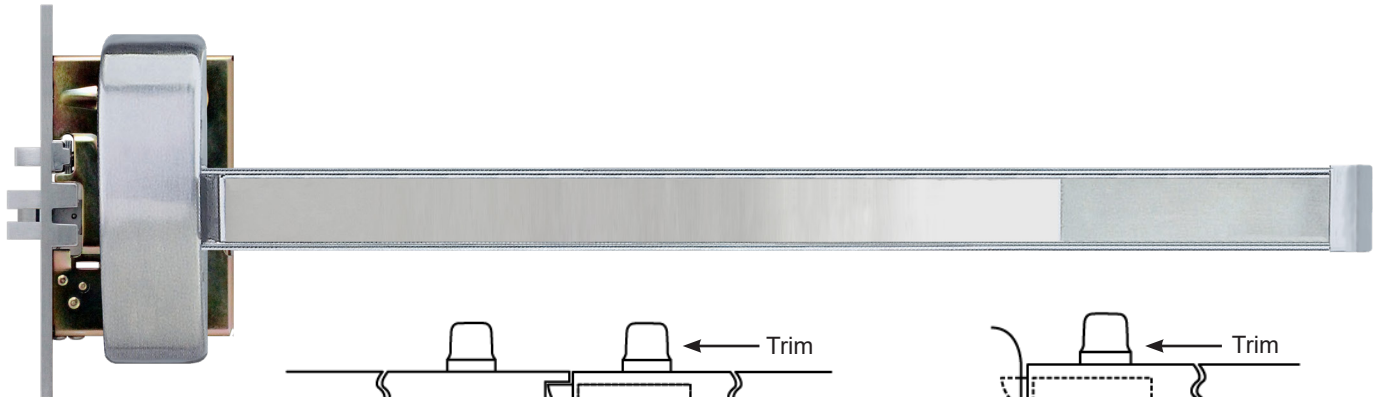


Pair of Doors



Single Doors

Specifications

For Doors.....	Wood / Metal 1 3/4" (44.5 mm) minimum thickness 4 1/2" (114 mm) minimum stile width
Chassis.....	Non-ferrous Alloy (Panic Grade), Steel (Fire Grade)
Chassis Cover.....	Non-ferrous plated material
Mounting.....	Furnished standard with wood and machine screws
End Cap.....	Brass, Bronze or Stainless Steel construction
Handing.....	Handed. Non-Reversible. Specify RHR or LHR
ANSI Standard.....	A156.3, Grade 1
Strikes.....	Standard ANSI strike
Fire Exit Hardware.....	FMR9800 Series for fire exit hardware for all types of 8' x 8' double doors for up to 3-hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes
Mortise Lock.....	Grade (1) for 1 3/4" (44.5 mm) thick doors. Handed (Non-reversible). Specify RHR or LHR. Fits door prepared for ANSI Standard A115.1
Trim.....	See Trim Designs section
Electronic Functions.....	(ELR) Electrical Latch Retraction and RX & LX Signal Switch available
Alarm.....	Prefix "NALRM" before PART #
Dogging Feature.....	Cylinder dogging available for non-fire rated applications
Anti-Microbial Coating.....	Available on US32D only. Use part # ANTB-EXIT

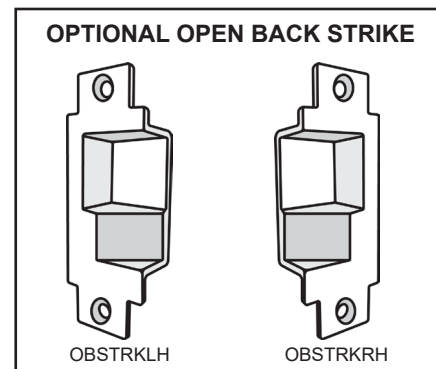

MODEL SIZE	ACTUAL LENGTH	MAX CUT DOWN	DOOR SIZE
MR9800EO36, FMR9800EO36 MR9805EO36, FMR9805EO36	32"	6"	30" to 36" door width
MR9800EO48, FMR9800EO48 MR9805EO48, FMR9805EO48	44"	12"	36" to 48" door width