


LOCKABLE FIRE EXIT UL-LISTED MULLION

For pricing & availability inquiries contact your Local Distributor or click [here](#) for the list of our Sales Representatives

- LOCKABLE*
- REMOVABLE
- UL-LISTED**
- FIRE RATED

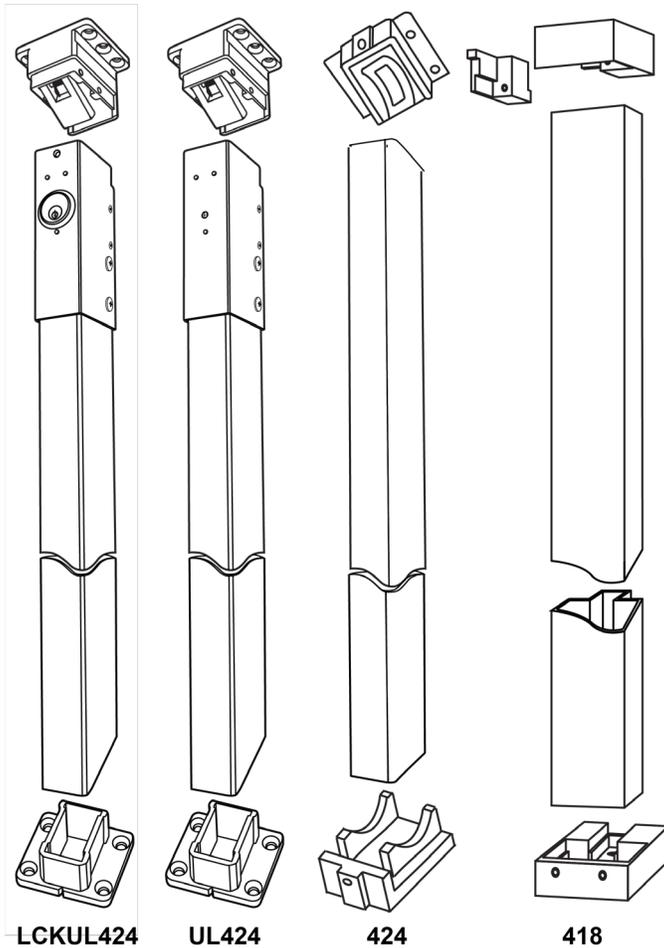

PART #	DESCRIPTION
UL424**	UL-Listed Fire Exit Mullion. 2" x 3" x 8' steel tubing round corner, iron construction with iron top and bottom retainers. To be used with two rim type devices on two independent active doors with full double door openings.
LCKUL424*	Lockable, UL-Listed Fire Exit Mullion. 2" x 3" x 8' steel tubing round corner, iron construction with iron top and bottom retainers. To be used with two rim type devices on two independent active doors with full double door openings. Schlage C keyway.
ICLCKUL424	Lockable, UL-Listed Fire Exit Mullion. 2" x 3" x 8' steel tubing round corner, iron construction with iron top and bottom retainers. To be used with two rim type devices on two independent active doors with full double door openings. Interchangeable core locks will accept compatible 6 or 7 pin cores with BEST, FALCON and ARROW.
ICSCCLCKUL424	Lockable, UL-Listed Fire Exit Mullion. 2" x 3" x 8' steel tubing round corner, iron construction with iron top and bottom retainers. To be used with two rim type devices on two independent active doors with full double door openings. Function available with Full size format, Schlage Interchangeable Core.
418	96" T-Shaped Non-Fire Rated Application (USP)
424	96" Rectangular Steel Mullion Fire Rated Application (USP)
ACCESSORIES	
418 BRACKETS	Top and bottom brackets with screw for 418 mullion
424 BRACKETS	Top and bottom brackets with screw for 424 mullion
UL424 BRACKETS	Top and bottom brackets with screw for UL424 mullion

- ICLCKUL424
- ICSCCLCKUL424