


# N-MR9800 & N-FMR9800 Series

## GRADE 1, Mortise Lock Exit Device




<b>LIFETIME WARRANTY</b>	<b>BHMA</b> CERTIFIED Be Safe. Be Secure. Look for the Mark.	<b>MEETS</b> <i>The Buy American Act</i>	ADA COMPLIANT	<b>UL</b> US 3 HOUR FIRE RATED UL10C, UBC7-2-1997
--------------------------	--	---	---------------	---

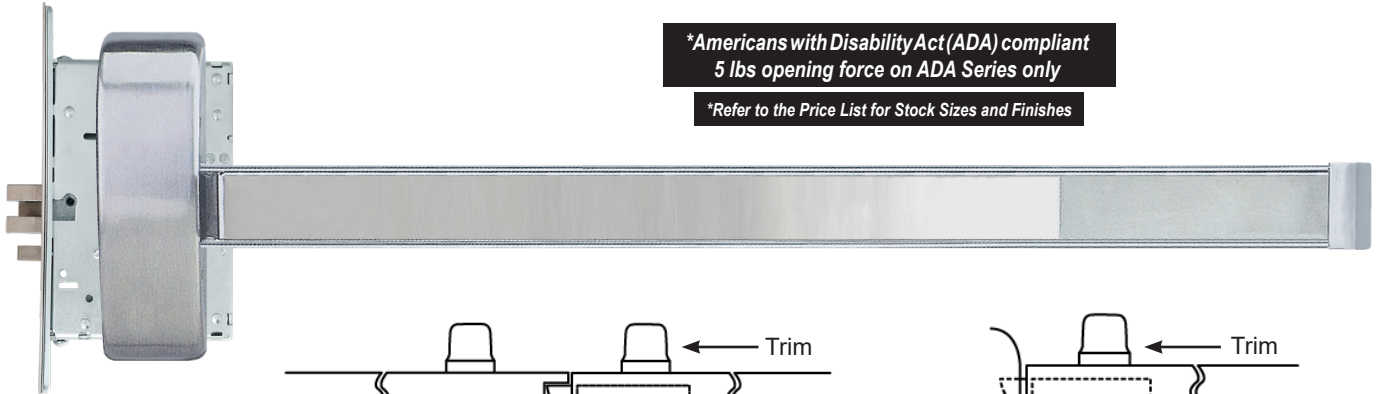


**\*Americans with Disability Act (ADA) compliant  
5 lbs opening force on ADA Series only**

**\*Refer to the Price List for Stock Sizes and Finishes**

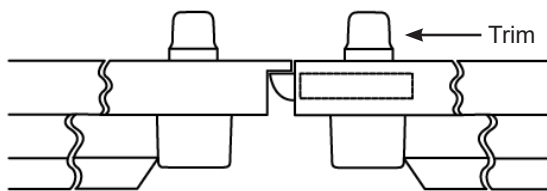


Pair of Doors



Single Doors

### Specifications

<b>For Doors.....</b>	Wood / Metal 1 3/4" (44.5 mm) minimum thickness 4 1/2" (114 mm) minimum stile width
<b>Mortise Lock Case.....</b>	Steel
<b>Head Chassis.....</b>	Aluminum
<b>Chassis Cover.....</b>	Stainless Steel
<b>Mounting.....</b>	Furnished standard with wood and machine screws
<b>End Cap.....</b>	Stainless Steel Construction
<b>Handing.....</b>	Handed. Easily Field Reversible. Specify RHR or LHR for convenience.
<b>ANSI Standard.....</b>	A156.3, Grade 1
<b>Strikes.....</b>	Standard ANSI Strike (Stainless Steel)
<b>Fire Exit Hardware.....</b>	N-FMR9800 Series for fire exit hardware for all types of 8' x 8' double doors for up to 3-hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes
<b>Mortise Lock.....</b>	Grade (1) for 1 3/4" (44.5 mm) thick doors. Handed, Field Reversible. Specify RHR or LHR. Fits door prepared for ANSI Standard A115.1
<b>Trim.....</b>	See Trim Designs section
<b>Electronic Functions.....</b>	(ELR) Electrical Latch Retraction and RX & LX Signal Switch available
<b>Alarm.....</b>	Prefix "NALRM" before PART #
<b>Dogging Feature.....</b>	Cylinder dogging available for non-fire rated applications
<b>Anti-Microbial Coating.....</b>	Available on US32D only. Use part # ANTB-EXIT

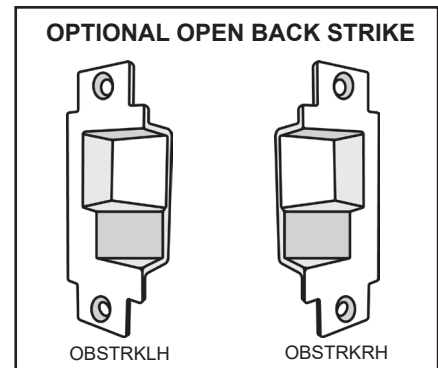

MODEL SIZE	ACTUAL LENGTH	MAX CUT DOWN	DOOR SIZE
N-MR9800EO36, N-FMR9800EO36 N-MR9805EO36, N-FMR9805EO36	32"	6"	30" to 36" door width
N-MR9800EO48, N-FMR9800EO48 N-MR9805EO48, N-FMR9805EO48	44"	12"	36" to 48" door width