



**PART#**  
**CR4244**

Finish: **ALUMINUM or DARK BRONZE**


Size: **36", 48", 72", 96", 120"**

**1 1/2" H x 2 3/4" W** (38.1mm x 69.9mm)

**SILL NOSING**

**Packaging Includes:**

- 1 unit of Threshold

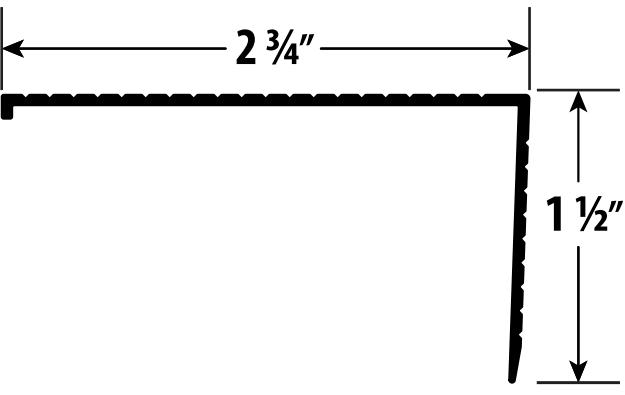

**INSTALLATION INSTRUCTIONS**

1. Measure width and cut the nosing to exact full width of the opening.
2. If necessary, trim and notch the nosing ends to accommodate the side jamb stops.
3. Secure using construction grade adhesive to bond nosing to concrete sill to be covered.  
(Note: Adhesive not included)
4. Seal both ends of the nosing and along the sides.  
If used with pre-installed threshold, unscrew threshold and slip top leg of nosing under outside leg of threshold.
5. If installed in the door, operate the door multiple times to ensure proper adjustment to prevent the door from self-closing and latching.



**PART#**  
**CR4244**

Finish: **ALUMINUM or DARK BRONZE**


Size: **36", 48", 72", 96", 120"**

**1 1/2" H x 2 3/4" W** (38.1mm x 69.9mm)

**SILL NOSING**

**Packaging Includes:**

- 1 unit of Threshold

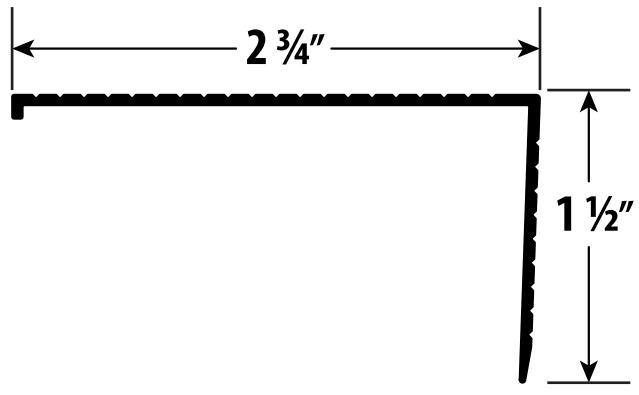

**INSTALLATION INSTRUCTIONS**

1. Measure width and cut the nosing to exact full width of the opening.
2. If necessary, trim and notch the nosing ends to accommodate the side jamb stops.
3. Secure using construction grade adhesive to bond nosing to concrete sill to be covered.  
(Note: Adhesive not included)
4. Seal both ends of the nosing and along the sides.  
If used with pre-installed threshold, unscrew threshold and slip top leg of nosing under outside leg of threshold.
5. If installed in the door, operate the door multiple times to ensure proper adjustment to prevent the door from self-closing and latching.