



## ITEM INFO: PST-201 VINYL INSERT

Finish: ALUMINUM or DARK BRONZE

Size: 36", 48", 72", 96"

**1/2" H x 5" W** (12.7mm x 127mm)  
**PANIC SADDLE THRESHOLD**



### Packaging Includes:

1 unit of Threshold

Fasteners: #10 x 1" PPFHWS

#### INSTALLATION INSTRUCTIONS

1. Carefully measure to fit within the frame opening and make sure the vinyl makes contact with door face when door is closed.
2. If necessary trim and notch the threshold ends to accommodate the side jamb stops.
3. Trim seal 1/8" longer than the retainer threshold at each end.
4. Mark and drill pilot holes through the pre-drilled holes in the threshold and fasten with screws provided. Use a weatherproof sealant at all edges and joints.
5. Operate the door multiple times to ensure proper adjustment so as not to prevent the door from self-closing and latching.

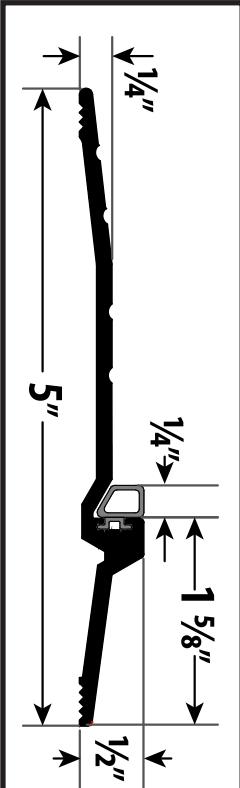

**BHMA CERTIFIED**

CLASSIFIED  
UL  
LISTED  
R26381  
5NG2

GASKETING MATERIAL FOR FIRE DOORS INTENDED FOR APPLICATION TO UL LISTED STEEL FRAMES AND/OR CLASSIFIED STEEL COVERED COMPOSITE TYPE, AND HOLLOW METAL TYPE FIRE DOORS RATED UP TO 3HRS; WOOD AND PLASTIC COVERED COMPOSITE TYPE FIRE DOORS RATED UP TO 1-1/2 HRS; AND WOOD CORE TYPE FIRE DOORS RATED UP TO 20 MINUTES. **43ZY**



## ITEM INFO: PST-201 VINYL INSERT

Finish: ALUMINUM or DARK BRONZE

Size: 36", 48", 72", 96"

**1/2" H x 5" W** (12.7mm x 127mm)  
**PANIC SADDLE THRESHOLD**


### Packaging Includes:

1 unit of Threshold

Fasteners: #10 x 1" PPFHWS

#### INSTALLATION INSTRUCTIONS

1. Carefully measure to fit within the frame opening and make sure the vinyl makes contact with door face when door is closed.
2. If necessary trim and notch the threshold ends to accommodate the side jamb stops.
3. Trim seal 1/8" longer than the retainer threshold at each end.
4. Mark and drill pilot holes through the pre-drilled holes in the threshold and fasten with screws provided. Use a weatherproof sealant at all edges and joints.
5. Operate the door multiple times to ensure proper adjustment so as not to prevent the door from self-closing and latching.

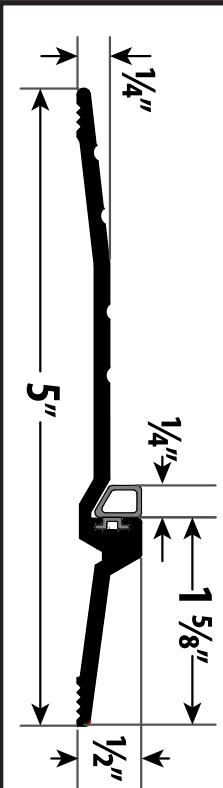

CLASSIFIED  
UL  
LISTED  
R26381  
5NG2

GASKETING MATERIAL FOR FIRE DOORS INTENDED FOR APPLICATION TO UL LISTED STEEL FRAMES AND/OR CLASSIFIED STEEL COVERED COMPOSITE TYPE, AND HOLLOW METAL TYPE FIRE DOORS RATED UP TO 3HRS; WOOD AND PLASTIC COVERED COMPOSITE TYPE FIRE DOORS RATED UP TO 1-1/2 HRS; AND WOOD CORE TYPE FIRE DOORS RATED UP TO 20 MINUTES. **43ZY**