



TUSCANY
CLUTCH MECHANISM
OPTIONAL THRU BOLT INSTALLATION



Meets ADA requirements
Specially designed for Barrier Free Application
Conforms with ANSI / BHMA A156.2, Series 4000,
Grade 2 Requirements, Exceeds 400,000 Cycles

- Push in and turn button function
- Optional Removable Thru-Bolt
- Individual spring on each side to prevent lever sag, maintain reliability and reduce maintenance
- UL LISTED 3 HOUR RATED 1/2" Throw deadlatch completely reversible for flat & beveled doors
- Free turning handle in the locked position, without retracting the latch to prevent breaking of handle

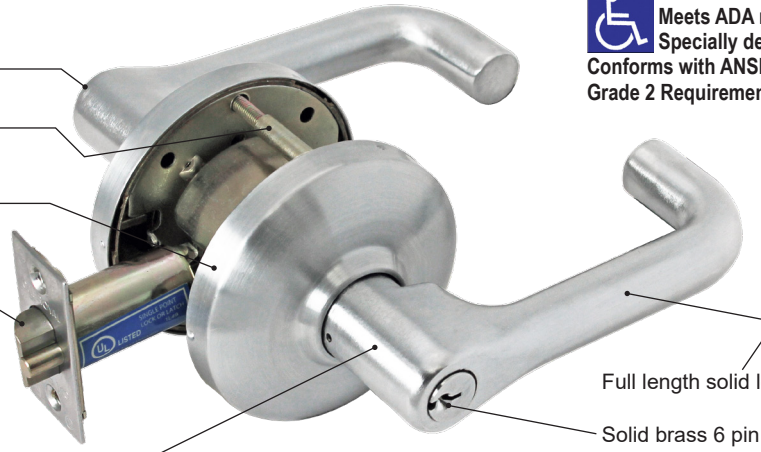


Full length solid lever handle with 3/8" return
Solid brass 6 pin "C" keyway cylinder.


Available with Small Format Interchangeable Core




2-AUG DESIGN




2-DAN DESIGN



2-LON DESIGN



2-TAC DESIGN



SPECIFICATIONS

GENERAL

Full length 4 3/4" lever handle with 3/8" return. Rose diameter 3 3/8". Key removable outside lever for fast re-keying. Non-handed levers. Concealed mounting screws.

CLUTCH

Free turning handle in the lock position without retracting the latch, to deter breaking of handle.

APPLICATIONS

For offices, schools, hospitals, apartments, hotel / motel, residential, commercial and public buildings.

DOOR RANGES

1 3/8" to 1 3/4" thickness. 2" to 2 1/4" thickness also available upon request.

ANSI STANDARDS

Meets or exceeds BHMA/ANSI A 156.2 Series 4000, Grade 2 (FF-H 106C)

LATCH FACEPLATE

Standard 2 1/4" x 1 1/8" for 2 3/4" backset.

TRIM

Optional thru-bolted assembly through door with separate spring cage for each lever.

STRIKES

ASA 1 1/4" x 4 7/8" standard. Other strikes available upon request.

CYLINDER & KEYWAYS

6 pin solid brass "C" keyway standard. Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59 / 60, Corbin-Russwin L4, Sargent LA-LB-LC, Falcon / Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High Security Cylinders.

HOUSING

Cold Rolled Steel and Zinc Dichromate finish for rust resistance with precision cast steel retractor. 2 1/8" diameter bore.

INTERCHANGEABLE CORE (IC)

Interchangeable Core locks will accept compatible 6 or 7 pin cores with **BEST, FALCON and ARROW**. Prefix "IC" before part number. Available combined or uncombined. Temporary construction cores available. Factory keying with control key and master key available.

LATCH OPTIONS


2 3/4" standard, brass with 1/2" throw. 2 3/8", 3 3/4" and 5" backset optional. GND750 deadlatch reversible for flat and beveled door. 3/4" throw anti-friction deadlatch for pair of fire doors.

TUSCANY "TUSL" SERIES FINISHES AND FUNCTIONS




FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
605	US3	Polished Brass
606	US4	Satin Brass
609	US5	Antique Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
626	US26D	Satin Chrome

Refer to price list for stock finishes and functions

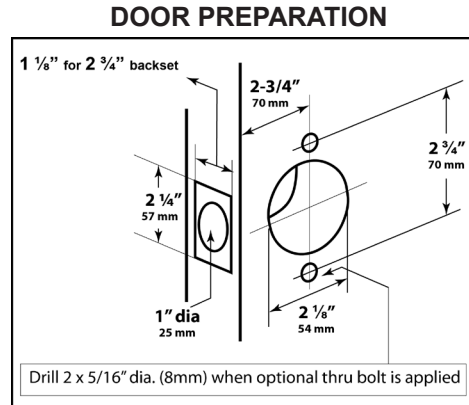


HOW TO ORDER:
 Replace "TUSL" with "2-AUG", "2-DAN", "2-LON", or "2-TAC" design name when ordering.
Example: CTUSL00 entrance in "2-AUG" design is "C2-AUG00".

CTUSL00
 ICCTUSL00
 ANSI: F109
 FED#161A/160A




ENTRANCE / OFFICE LOCK
 Turn / Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.

TUSL20
 CTUSL20
 ANSI: F76




PRIVACY LOCK
 Latch bolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside. Turning inside lever or closing door releases push button.

CTUSL01
 ICCTUSL01
 ANSI: F82
 FED#161B/160B




ENTRANCE LOCK PUSH BUTTON
 Pushing button in inside lever locks outside lever. Turning inside lever or operating key in outside lever releases button automatically. Closing door does not release button. Button cannot be fixed in lock position. Inside lever always free. Latch bolt automatically deadlocks when door is closed.

TUSL30
 ANSI: F75



PASSAGE SET
 Latch bolt operated by lever from either side at all times.

CTUSL03
 ICCTUSL03
 ANSI: F84
 FED#161R/160R



CLASSROOM LOCK
 Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latch bolt is operated by turning inside lever.

TUSL40



DUMMY LEVER
 Single dummy trim for one side of door. Pull only.

CTUSL05
 ICCTUSL05
 ANSI: F86
 FED#161D/160D



STOREROOM LOCK
 Dead locking latch bolt operated by key in outside lever or by rotating inside lever. Outside lever is always fixed.

TUSL50
 ANSI: F89



EXIT LOCK
 Blank plate outside. Inside lever always unlocked.

IC Indicates function available with BEST, FALCON & ARROW Interchangeable Core.
ALL OTHER FUNCTIONS NOT LISTED ARE AVAILABLE ON SPECIAL ORDER